

TERMO DE ACEITE TÉCNICO

Solicitante: VIVO- Projeto Escolas Rurais

NOC/Operador: Guilherme Cunha


Cliente: VIVO

Empresa
EMC Brasil

VSAT-ID
VIVO-PER-31021431-MG

Link kbps
256k/128k

Plataforma
VSAT

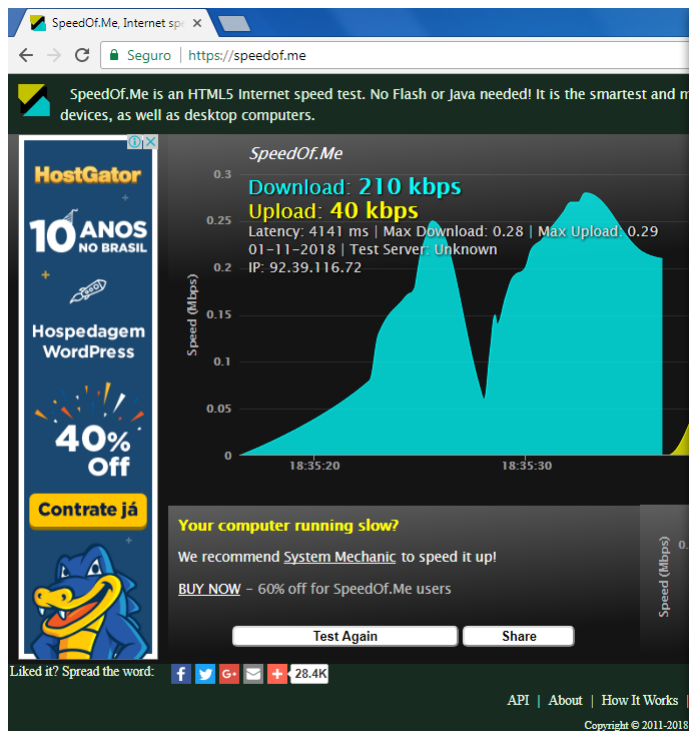

SatLink VSAT	
	
Status	Device Status
Satellite	Model
Statistics	Software Version
Device	LAN MAC Address
DHCP	DVB MAC Address
Eventlog	System Up Time
Configuration	CPU Load
Satellite	System Name
IP	System Contact
Static NAT	System Location
Lineup	
Device	
Help	
Introduction	
Status	
Configuration	

You are logged in as install (2)

© Copyright 2006-2014 STM Group. All Rights Reserved.

```


Telnet 10.29.66.33
#
Satellite <DVB> TX Configuration
Auto start : Enabled
IDU Output Power : -20 dBm
IDU Max Output Power: 0.0 dBm
Default CW Frequency: 0.000000 GHz
ATM mode : UC-Mux
Header Compression : None

Satellite <DVB> Transmitter Status
State : On <DVB-RCS2>
IDU Output Power : -19.9 dBm
Es/No : 13.0 dB
Header Compression : Disabled
Timing correction : -31 us (250206 us)
Frequency correction: 170 Hz
#
Satellite <DVB> RX Configuration
Auto start : Enabled
Max Traffic MODCOD : 23 16APSK-9/10
RX watchdog : 15 minute

Idx Pri SymbRate [Mbps] Freq [GHz] Mode PopId SatId Pos SatName
Name Enable
* 0 0 30.000000 12.050000 DVB-S2 104 0 0.0 E
1 1 25.333333 12.050000 DVB-S2 4 0 0.0 E

Satellite <DVB> Receiver Status
Rx State : On
DVB State : Forward link up
Network : 1326 - 114R Beam
Frequency : 12.049921 GHz
Symbol Rate : 29.999578 Msps
S2 ModCod : receiving : 10 16APSK-2/3
- current max : 22 16APSK-8/9
Pilot : On
Frame length : Short
DVB S2 Mode : ACM
DVB S2 Stream type : MPEG-TS
Roll off : 0.20
SNR : 15.6 dB
Input Power : -32 dBm
#

```

SatLink VSAT	
	
Status	Device Status
Satellite	Model
Statistics	Software Version
Device	LAN MAC Address
DHCP	DVB MAC Address
Eventlog	System Up Time
Configuration	CPU Load
Satellite	System Name
IP	System Contact
Static NAT	System Location
Lineup	
Device	
Help	
Introduction	
Status	
Configuration	

You are logged in as install (2)

© Copyright 2006-2014 STM Group. All Rights Reserved.

CMD - Atalho

Resposta de 8.8.8.8: bytes=32 tempo=849ms TTL=49
Resposta de 8.8.8.8: bytes=32 tempo=940ms TTL=49
Resposta de 8.8.8.8: bytes=32 tempo=1002ms TTL=49
Resposta de 8.8.8.8: bytes=32 tempo=1074ms TTL=49
Resposta de 8.8.8.8: bytes=32 tempo=1095ms TTL=49
Resposta de 8.8.8.8: bytes=32 tempo=1068ms TTL=49
Resposta de 8.8.8.8: bytes=32 tempo=1062ms TTL=49
Resposta de 8.8.8.8: bytes=32 tempo=1072ms TTL=49
Resposta de 8.8.8.8: bytes=32 tempo=1058ms TTL=49
Resposta de 8.8.8.8: bytes=32 tempo=992ms TTL=49
Resposta de 8.8.8.8: bytes=32 tempo=819ms TTL=49
Resposta de 8.8.8.8: bytes=32 tempo=889ms TTL=49
Resposta de 8.8.8.8: bytes=32 tempo=958ms TTL=49
Resposta de 8.8.8.8: bytes=32 tempo=709ms TTL=49
Resposta de 8.8.8.8: bytes=32 tempo=1102ms TTL=49
Resposta de 8.8.8.8: bytes=32 tempo=1083ms TTL=49
Resposta de 8.8.8.8: bytes=32 tempo=1069ms TTL=49
Resposta de 8.8.8.8: bytes=32 tempo=1068ms TTL=49
Resposta de 8.8.8.8: bytes=32 tempo=1072ms TTL=49
Resposta de 8.8.8.8: bytes=32 tempo=1064ms TTL=49
Resposta de 8.8.8.8: bytes=32 tempo=954ms TTL=49
Resposta de 8.8.8.8: bytes=32 tempo=1179ms TTL=49
Resposta de 8.8.8.8: bytes=32 tempo=1030ms TTL=49
Resposta de 8.8.8.8: bytes=32 tempo=1079ms TTL=49
Resposta de 8.8.8.8: bytes=32 tempo=1090ms TTL=49
Resposta de 8.8.8.8: bytes=32 tempo=1067ms TTL=49
Resposta de 8.8.8.8: bytes=32 tempo=1083ms TTL=49
Resposta de 8.8.8.8: bytes=32 tempo=1075ms TTL=49
Resposta de 8.8.8.8: bytes=32 tempo=1091ms TTL=49
Resposta de 8.8.8.8: bytes=32 tempo=1067ms TTL=49
Resposta de 8.8.8.8: bytes=32 tempo=1085ms TTL=49
Resposta de 8.8.8.8: bytes=32 tempo=1062ms TTL=49
Resposta de 8.8.8.8: bytes=32 tempo=1067ms TTL=49
Resposta de 8.8.8.8: bytes=32 tempo=1080ms TTL=49
Resposta de 8.8.8.8: bytes=32 tempo=1079ms TTL=49
Resposta de 8.8.8.8: bytes=32 tempo=1100ms TTL=49

Estatísticas do Ping para 8.8.8.8:
Pacotes: Enviados = 120, Recebidos = 118, Perdidos = 2 (1% de perda)
Aproximar um número redondo de vezes em milissegundos:
Mínimo = 787ms, Máximo = 3213ms, Média = 1364ms
Control-C
^C
C:\Windows\System32>arp -a

Interface: 10.29.66.34 --- 8xd
Endereço IP Endereço físico Tipo
10.29.66.33 00-20-0e-10-83-07 dinâmico
10.29.66.39 ff-ff-ff-ff-ff-ff estático
224.0.0.2 01-00-5e-00-00-02 estático
224.0.0.22 01-00-5e-00-00-16 estático
224.0.0.251 01-00-5e-00-00-fb estático
224.0.0.252 01-00-5e-00-00-fc estático
239.255.255.250 01-00-5e-7f-ff-fa estático
255.255.255.255 ff-ff-ff-ff-ff-ff estático

C:\Windows\System32>

SatLink VSAT

10.29.66.33/wmi/dwp/index_page.dwp

STM

SatLink VSAT

Status

Satellite

Statistics

Device

DHCP

Eventlog

Configuration

Satellite

IP

Static NAT

Lineup

Device

Help

Introduction

Status

Configuration

Device Status

Model

Software Version

LAN MAC Address

DVB MAC Address

System Up Time

CPU Load

System Name

System Contact

System Location

SatLink 2000

16.0.1.57

00:20:0e:10:83:07

00:20:0e:10:83:07

0 days, 00:09:14

24%

VIVO-PER-31021431-MG

CARATINGA-MG

You are logged in as install (2)

© Copyright 2006-2014 STM Group. All Rights Reserved.

18:30

11/01/2018