




Star 1000

Model 1500

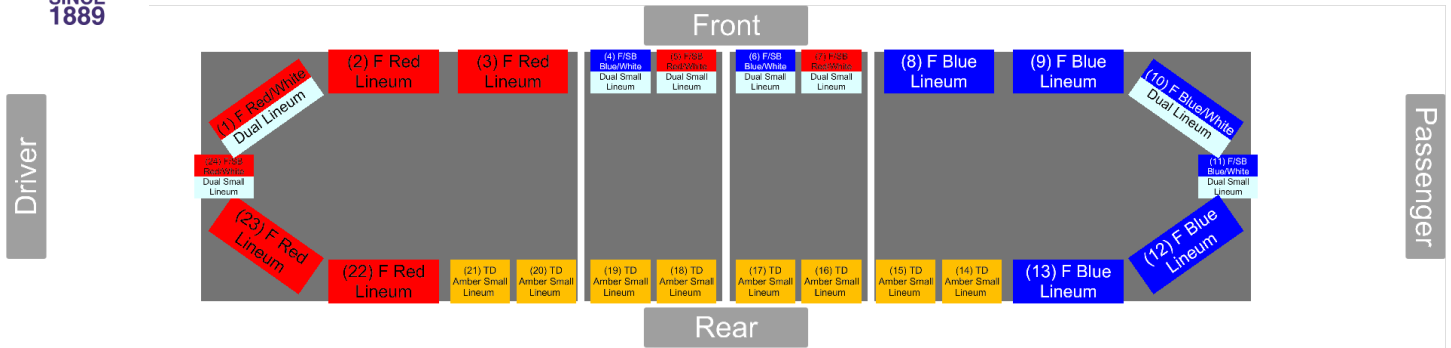


Position	Light Head Type and Style	Amperage
Position 01	Red/White Dual Lineum	0.550
Position 02	Red Lineum	0.550
Position 03	Red Lineum	0.550
Position 04	Blue/White Dual Small Lineum	0.550
Position 05	Red/White Dual Small Lineum	0.550
Position 06	Blue/White Dual Small Lineum	0.550
Position 07	Red/White Dual Small Lineum	0.550
Position 08	Blue Lineum	0.550
Position 09	Blue Lineum	0.550
Position 10	Blue/White Dual Lineum	0.550
Position 11	Blue/White Dual Small Lineum	0.550
Position 12	Blue Lineum	0.550
Position 13	Blue Lineum	0.550
Position 14	Amber Small Lineum	0.550
Position 15	Amber Small Lineum	0.550
Position 16	Amber Small Lineum	0.550
Position 17	Amber Small Lineum	0.550
Position 18	Amber Small Lineum	0.550
Position 19	Amber Small Lineum	0.550
Position 20	Amber Small Lineum	0.550
Position 21	Amber Small Lineum	0.550
Position 22	Red Lineum	0.550
Position 23	Red Lineum	0.550
Position 24	Red/White Dual Small Lineum	0.550

Customer	Order Number / PO	Order Date Jun 23, 2015
Order Notes		


Model 1500

Production Copy - Bill of Materials

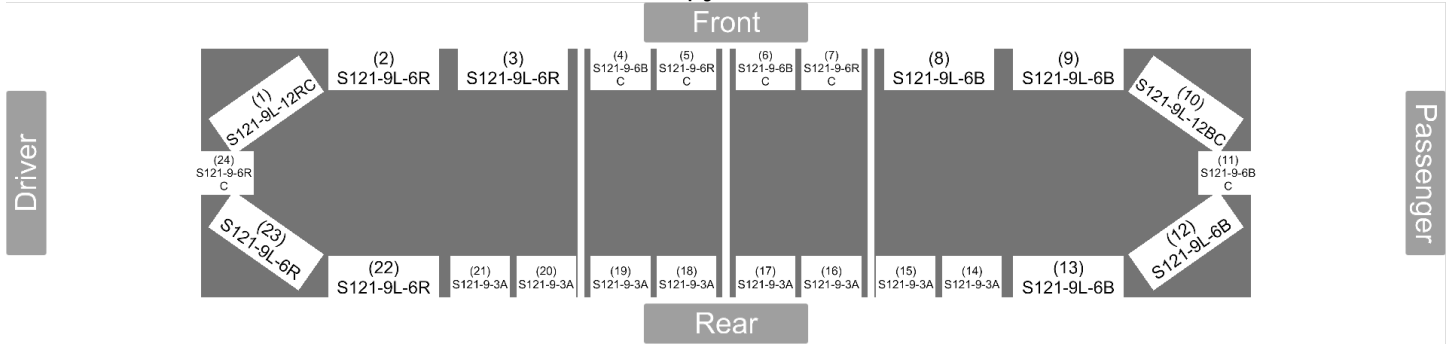


Quantity	Component	Description
1	S121-9L-12RC	Red/White Dual
4	S121-9L-6R	Red Lineum
3	S121-9-6BC	Blue/White Dual
3	S121-9-6RC	Red/White Dual Small
4	S121-9L-6B	Blue Lineum
1	S121-9L-12BC	Blue/White Dual
8	S121-9-3A	Amber Small Lineum

Wiring Diagram

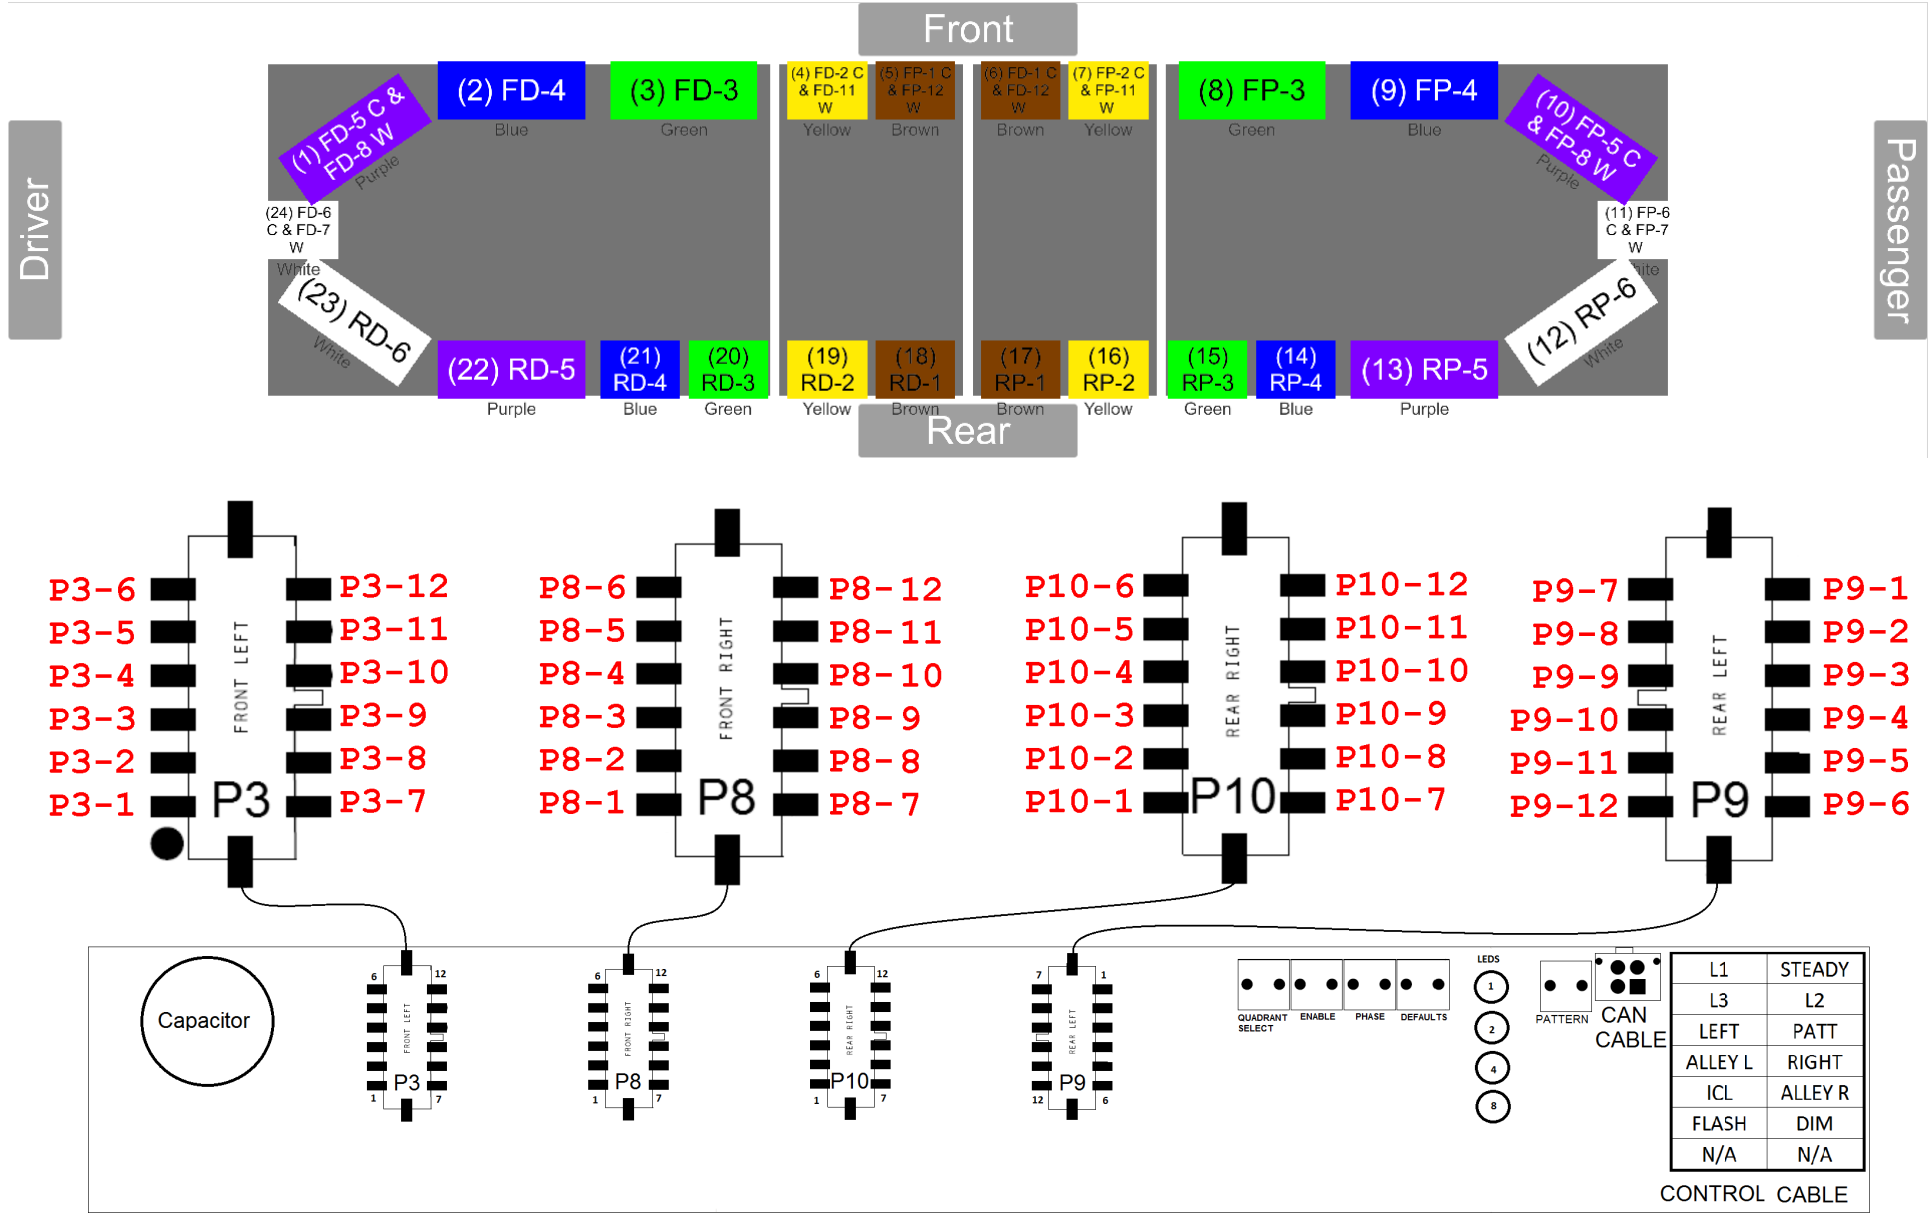

Bar Programming

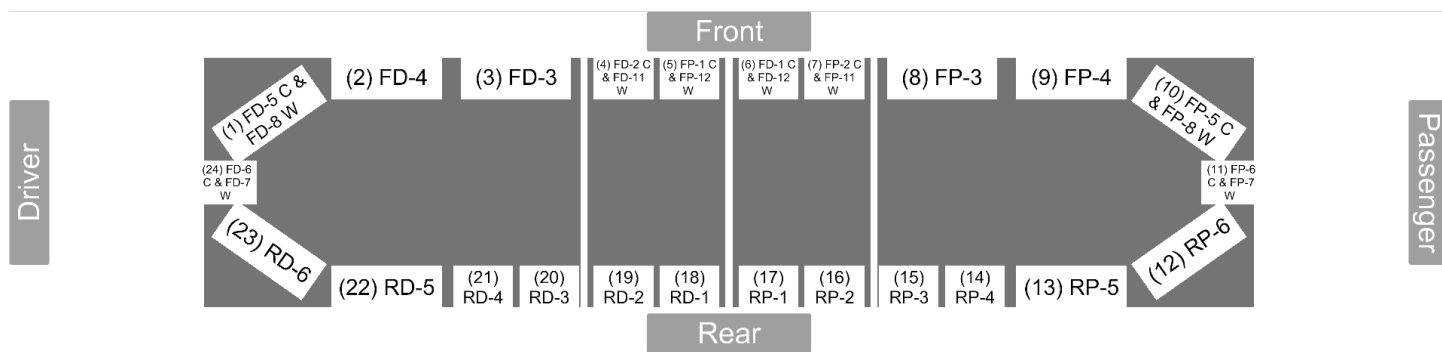

Input Map

Level 1 Takedown / Work Lights
 Level 2 Flashing Alley & Pursuit
 Level 3 Pattern
 ICL Dimmer
 Direct Left Direct Right
 Left Alley Right Alley
 --- ---

Default
Program
3

Default
Program
3

Function Definitions

Function	Positions		Pattern(s)
	Phase A	Phase B	
Takedown / Work Lights	FD-11 thru -12, FP-11 thru -12		Steady Burn
Level 1	RP-5 thru -6	RD-5 thru -6	Slow Triple
Level 2	FD-1 thru -2	FD-3 thru -5, FP-1 thru -5	Quadruple w/ Post Pop
Level 3	FD-1 thru -2, RP-5 thru -6	FD-3 thru -5, FP-1 thru -5, RD-5 thru -6	Random 2
Direct Left	RP-1 thru -4, RD-1 thru -4		Snake
Direct Right	RP-1 thru -4, RD-1 thru -4		Snake
Left Alley	FD-7		Steady Burn
Right Alley	FP-7		Steady Burn
ICL	FP-8	FD-8	Flicker
Dimmer	FD-1 thru -6, FD-8, FD-11 thru -12, FP-1 thru -6, FP-8, FP-11 thru -12, RP-1 thru -6, RD-1		Steady Burn
Flashing Pursuit	FP-11 thru -12	FD-11 thru -12	Fast Triple
Flashing Alley	FP-7	FD-7	Flicker