

WiFi Antenna Installation Best Practices


Design Guide

Choosing the right antenna


The first step to building a wireless network is choosing the correct antenna for your application. Coverage and range will be the driving factors. Aesthetics may also be important. There are several styles of WiFi antennas with different radiation patterns, polarization schemes, and mounting options.

Omni directional Antennas

Omni directional antennas provide a 360° donut shaped radiation pattern to provide the widest possible signal coverage in indoor and outdoor wireless applications. An analogy for the radiation pattern would be how an un-shaded incandescent light bulb illuminates a room. A high gain Omni's vertical radiation pattern will exhibit a flattened donut shape as shown below for the HG2415U-PRO antenna. Typical applications for Omni directional antennas include indoor office spaces, retail stores, warehouses, small office or home networks, outdoor cafés, campgrounds, RV parks and marinas. Examples of Omni directional antennas include the common "Rubber Duck" found on many WiFi access points and routers as well as the complicated antenna arrays used on cellular towers.

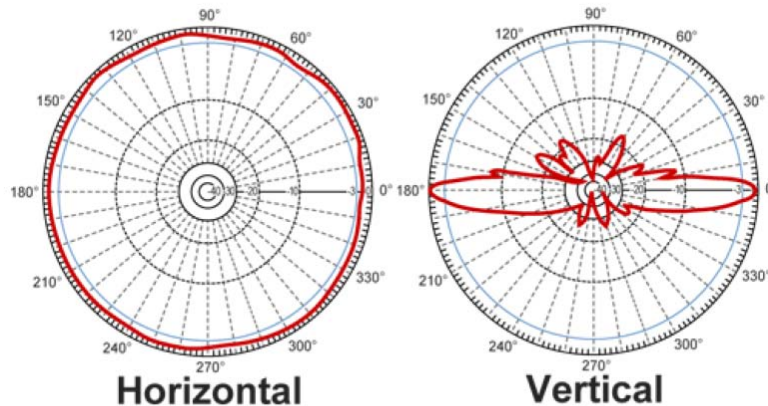


Typical Omni directional antenna radiation pattern (HG2415U-PRO)

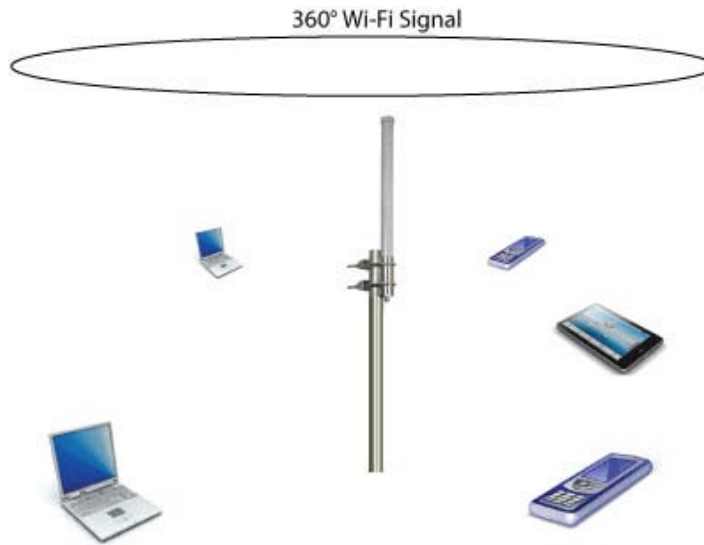


In the example above an Omni directional antenna is providing wireless connectivity for laptops, tablets, and smart phones in the coverage area.

Directional Antennas


A directional antenna, as the name implies, focuses the wireless signal in a specific direction resulting in a limited coverage area. An analogy for the radiation pattern would be how a vehicle head light illuminates the road. Examples of directional antennas include Yagi, Parabolic grid, patch, and panel antenna styles. High gain directional antennas can transmit and receive wireless signals for several miles given clear line of sight and sufficient transmit power. (More on line of site on page 5). Applications for directional antennas include point to point wireless links connecting buildings, a back-haul data link connecting cell towers together and point to multi-point wireless links where multiple remote clients with directional antennas communicate with a single central tower with an Omni directional antenna.

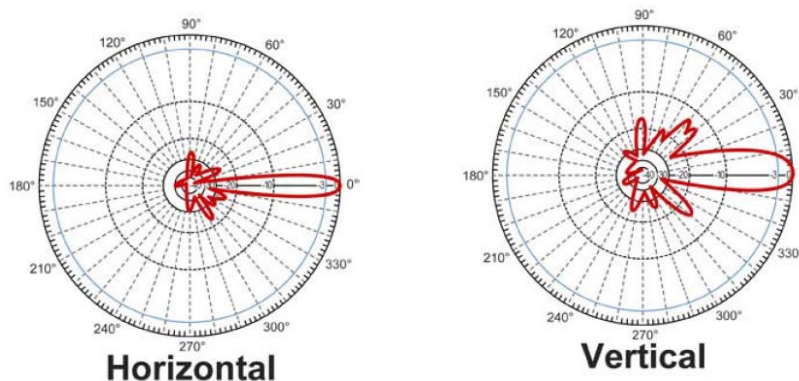

Typical Directional Antenna Radiation Pattern (HG2424EG-NF)

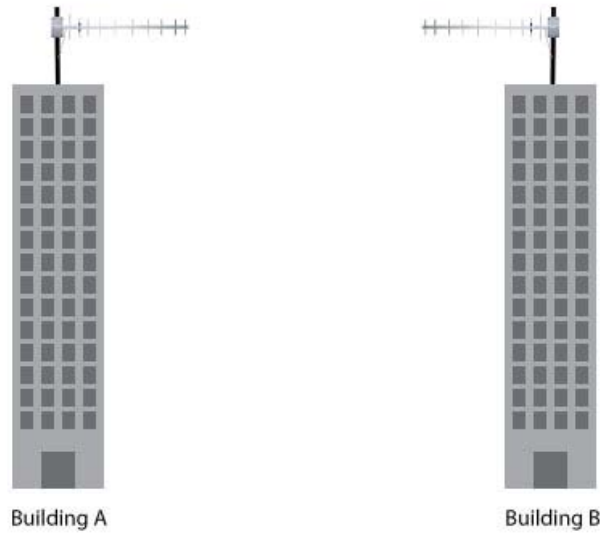


In the example above building A and building B are set up for a directional, point to point network using Yagi antennas

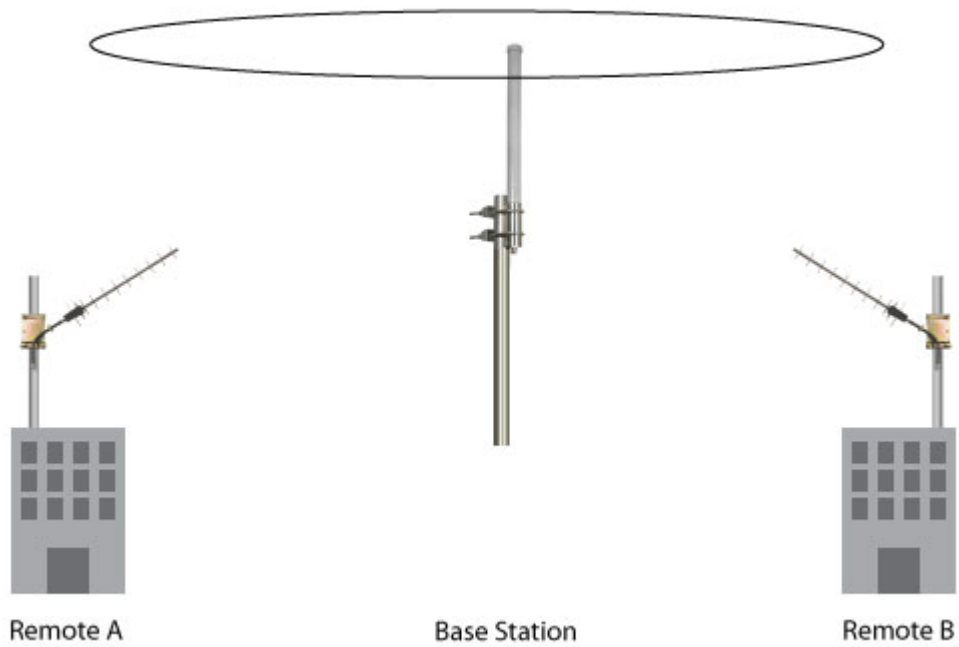

In this example both remote sites A and B have directional Wi-Fi connectivity to the base station fitted with an Omni directional antenna. This is an example of a point to multi-point set up.

Antenna Polarity

Polarization refers to the orientation of the electric field component of an electromagnetic wave with respect to the Earth's surface. An electromagnetic wave is composed of electric and magnetic fields propagating perpendicular to each other. Radio and light are examples of electromagnetic waves. Electromagnetic waves can propagate with linear, circular or elliptical polarization. Linear polarization is the most popular method used in WiFi communications and can take two forms, vertical and horizontal. Polarity must be observed on both ends of a communication link. A properly designed antenna will offer 20 dB or more of isolation between the two polarities.

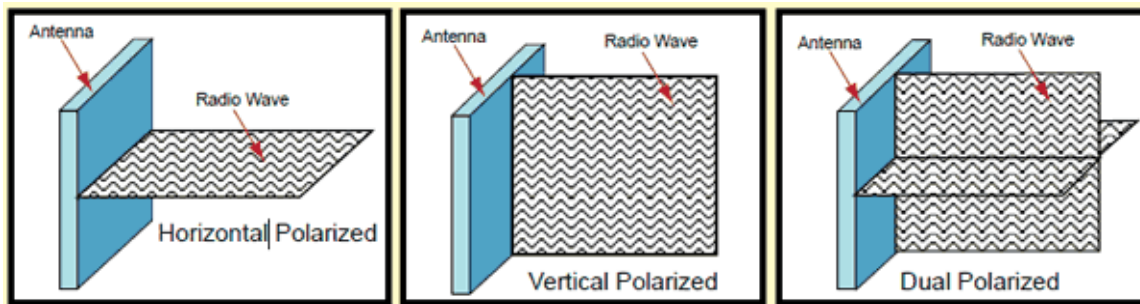

Dual Polarized Antennas

A dual polarized antenna uses extra internal elements to provide two polarities in a single package via separate input ports. For a linear design both vertical and horizontal polarities are available. For a circular design both right hand circular polarity (RHCP) and left hand circular polarity (LHCP) are available. The isolation between the two ports allows the antenna to transmit or receive two signals on the same frequency simultaneously. Dual polarity antennas have multiple uses. In outdoor 802.11n multiple input-multiple output (MIMO) systems, the isolation allows the two MIMO streams to coexist without interference. For indoor 802.11g systems, polarization or spatial diversity can counteract the effects of multipath and fading. In DBS home satellite systems, polarization is used to allow twice the amount of transponders to be installed on a satellite.

Antenna Frequency

Antennas operate at different frequencies to suit different applications. The antennas frequency must match the frequency of the amplifier, access point, or router it will be attached to in order for the system to work. In the US the 900, 2400 and 5000 MHz frequency bands are set aside by the FCC for unlicensed Industrial, Scientific and Medical (ISM) applications. The lack of licensing requirements has greatly encouraged the growth of the wireless industry. These bands are used for consumer and commercial WiFi and WLAN applications as well as for commercial Radio Frequency Identification (RFID) and Supervisory Control and Data Acquisition (SCADA) applications. For the consumer the 2.4 GHz band is the primary band one uses for WiFi, Bluetooth, cordless phone, printer, keyboard, mouse and gaming controller applications. Cellular use licensed bands spread over the 700 – 2700 MHz range.

Antenna Gain


Gain is a relative measure of an antenna's ability to direct or concentrate radio frequency energy in a particular direction or pattern. Gain is typically measured in dB over Isotropic point source, dBi. The analogy of an Isotropic point source would be a sun in the center of a universe. The choice of gain is dependent on system design, coverage, range, and transmit power. A higher gain number is not always the best choice. Gain and antenna type must be chosen to meet all objectives.

Antenna Installation Best Practices

Line of Sight

Whether you are installing a wireless network indoors or outdoors you must always consider line of site. The path between two antennas is referred to as the Line of Sight. There are three main categories of Line of Sight, the first being full Line of Sight (LOS) where no obstacles reside between the two antennas, the next is called Near Line of Sight (nLOS) which includes partial obstructions such as tree tops or buildings between the two antennas, and lastly Non Line of Sight (NLOS) where full obstructions exist between the two antennas. By determining the specific line of sight conditions in the WiFi network area you can then determine the correct type of wireless system to install.

Fresnel Zone- The area around the visual line-of-sight that radio waves spread out into after they leave the antenna. This area must be clear or else signal strength will weaken due to reflections (when wireless signals “bounce” off objects) that cause fading (loss of the wireless signal). Trees, buildings, towers etc. in the Fresnel Zone will produce reflections that can result in signal fading.

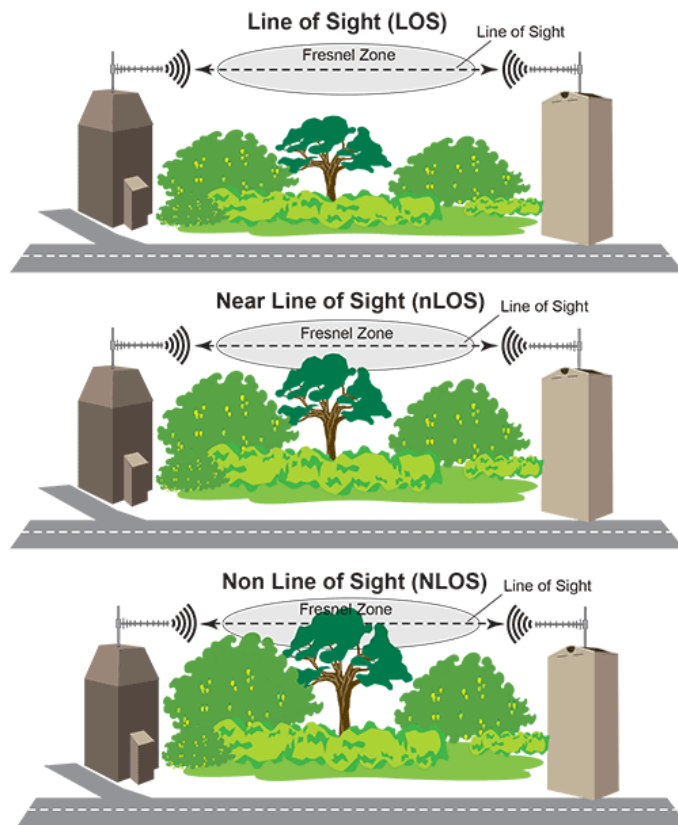

Path Loss


Path Loss is an area of concern for 2.4 GHz wireless systems. Although 2.4 GHz signals pass rather well through walls, they have a tough time passing through trees. The main difference is the water content in each. Walls are very dry: trees contain high levels of moisture. Radio waves in the 2.4 GHz band absorb into water quite well. ¹

Antenna Height (Outdoor Installations)

The correct installation height of an antenna depends on the factors outlined below.

- 1) Distance between the sites:** The longer the link, the higher the antenna needs to be due to the earth's curvature.
- 2) The Fresnel Zone:** See table 1 showing the 60% of Fresnel Zone values (accepted clearing on path). Add this to the earth curvature height.
- 3) Objects in the path:** At a frequency of 2.4 GHz, you need a clear line of sight (LOS). Tree tops will deflect and absorb some of the signal. The theory is that the height of the tallest object in the path of the signal should be added to the Fresnel Zone and earth curvature clearance heights. You will need to check the height of the trees, hills, buildings or any object on the link path and add this to the measurement for the total of the tower height.


The above three conditions make up the Radio Line of Sight

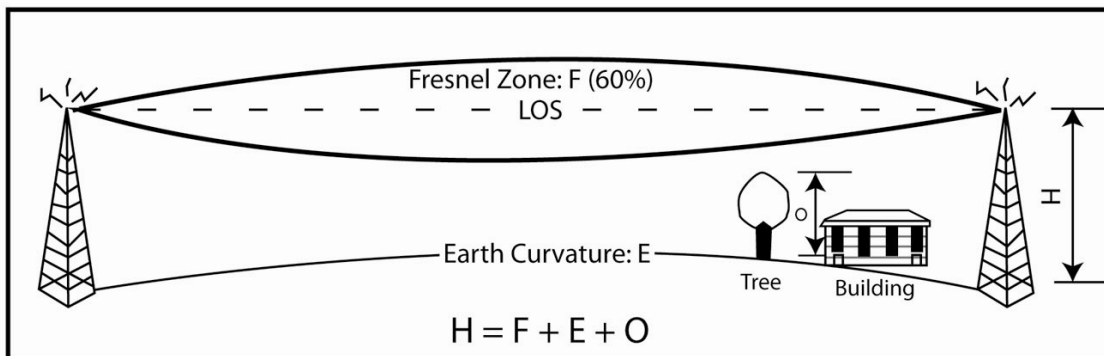

Wireless Link Distance (Miles)	Value Fresnel Zone F (60% at 2.4 GHz.) Approx. Value	Value E (Earth Curvature) Approx. Value	Antenna Height H Antenna Height No Obstruction
1	2	3	4
3	23	4	27
5	30	5	35
8	40	8	48
10	44	13	57
15	55	28	83
20	65	50	115
25	72	78	150

Outdoor Antenna Installation Best Practices

When installing an antenna outdoors it is important to use the minimum cable length required between the antenna and the access point or enclosure connection point. Also make sure the cable enters the enclosure or device from the bottom and leave enough cable to make a drip loop so rain and moisture will not enter the enclosure or equipment connections. Additionally we recommend that you wrap all outdoor cable connection points with moldable or self healing weatherproof tape. Also do not wrap the cable around a mast or pole. The cable should run straight down the mast from the antenna to the enclosure or WiFi amplifier.

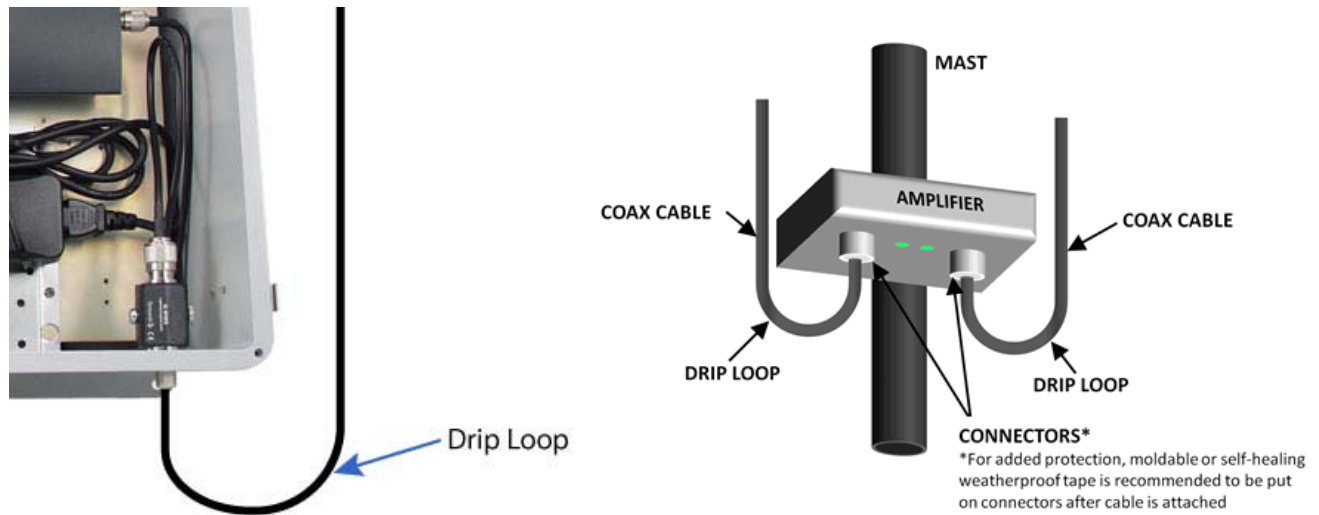

If you are using a wireless amplifier or radio it is best to position it as close to the antenna as possible (without putting too much stress on the connecting cables). Make sure the amplifier connectors are face down and leave enough room for drip loops.

Antenna Orientation (Indoor Installations)








When dealing with the installation and expansion of indoor wireless networks several factors must be considered. Most manufacturers of wireless access points and routers indicate a typical range that their equipment can provide. Usually these range estimates require line of sight which means you will need a clear unobstructed view of the antenna from the remote point in the link. In most cases there will be obstacles present in an indoor installation that could affect performance. Signals will be attenuated when they penetrate walls. Factors to consider include metal studs, concrete, fiberboard, aluminum siding, foil-backed insulation, pipes and electrical wiring, furniture and sources of interference. Sources of interference include other wireless equipment, cordless phones, microwave ovens and radio transmitters. In wireless transmissions, reflections (when wireless signals “bounce” off objects) and multipath (when wireless signals travel multiple paths to arrive at the receiver at different times) are as important as signal strength in determining the success of an installation. A signal will exhibit peaks and nulls in its amplitude and alteration of its polarization when propagating through walls, ceilings and reflecting off objects. In the case of indoor 802.11n/MIMO systems, multipath is actually required for the system to operate at the highest data rates. This is the rare case where a negative has become a positive.

Gain, Distance, and Loss Considerations

When planning your wireless network you first need to define the distance between wireless links or between the access points or radios. A link budget will need to be done. First you need to know the characteristics of the radio equipment being used. For every radio operating at a given data rate, there will be a specification listing transmit power and receive sensitivity. You also need to meet the minimum receive Carrier to Noise (C/N) and Carrier to Interference (C/I) ratios. As the distance between your wireless points increases you must either increase antenna gain or transmit power. In general increasing antenna gain is the lowest cost way to increase range. There are numerous on-line tools you can use to calculate your range.

Cable considerations

When designing a wireless network you should use 50 Ohm low loss coaxial cable for optimal results. This type of cable usually begins with a 100 series style up to a 900 series style. The lower the number of the series, the smaller the diameter of the cable. Lower number series cables such as 100, 195, etc. are used for very short pigtail connections to access points, surge protectors (in close proximity), and amplifiers. Larger series cable such as the 400 series are typically used for medium antenna cable runs and the 900 series is used for long distance applications such as base station tower installations that can be 100 feet or more off the ground. As a general rule, 195 series is good for distances under 20 feet, use 400 series cable for 20-50 feet, use 600 series cable for >50 feet. The chart below defines the approximate loss values for the main types of low loss cables.

100 Series  50 Ohm Impedance	<table><tr><th colspan="3">NOMINAL ATTENUATION</th></tr><tr><th>MHz</th><th>db/100ft</th><th>db/100m</th></tr><tr><td>900</td><td>22.8</td><td>74.8</td></tr><tr><td>1800</td><td>33.2</td><td>108.8</td></tr><tr><td>2500</td><td>39.8</td><td>130.6</td></tr></table>	NOMINAL ATTENUATION			MHz	db/100ft	db/100m	900	22.8	74.8	1800	33.2	108.8	2500	39.8	130.6			
NOMINAL ATTENUATION																			
MHz	db/100ft	db/100m																	
900	22.8	74.8																	
1800	33.2	108.8																	
2500	39.8	130.6																	
195 Series  50 Ohm Impedance	<table><tr><th colspan="3">NOMINAL ATTENUATION</th></tr><tr><th>MHz</th><th>db/100ft</th><th>db/100m</th></tr><tr><td>900</td><td>11.1</td><td>36.5</td></tr><tr><td>1800</td><td>16.0</td><td>52.5</td></tr><tr><td>2500</td><td>19.0</td><td>62.4</td></tr><tr><td>5800</td><td>29.9</td><td>98.1</td></tr></table>	NOMINAL ATTENUATION			MHz	db/100ft	db/100m	900	11.1	36.5	1800	16.0	52.5	2500	19.0	62.4	5800	29.9	98.1
NOMINAL ATTENUATION																			
MHz	db/100ft	db/100m																	
900	11.1	36.5																	
1800	16.0	52.5																	
2500	19.0	62.4																	
5800	29.9	98.1																	
200 Series  50 Ohm Impedance	<table><tr><th colspan="3">NOMINAL ATTENUATION</th></tr><tr><th>MHz</th><th>db/100ft</th><th>db/100m</th></tr><tr><td>900</td><td>9.9</td><td>32.6</td></tr><tr><td>1800</td><td>14.2</td><td>46.6</td></tr><tr><td>2500</td><td>16.9</td><td>55.4</td></tr><tr><td>5800</td><td>26.4</td><td>86.5</td></tr></table>	NOMINAL ATTENUATION			MHz	db/100ft	db/100m	900	9.9	32.6	1800	14.2	46.6	2500	16.9	55.4	5800	26.4	86.5
NOMINAL ATTENUATION																			
MHz	db/100ft	db/100m																	
900	9.9	32.6																	
1800	14.2	46.6																	
2500	16.9	55.4																	
5800	26.4	86.5																	
240 Series  50 Ohm Impedance	<table><tr><th colspan="3">NOMINAL ATTENUATION</th></tr><tr><th>MHz</th><th>db/100ft</th><th>db/100m</th></tr><tr><td>900</td><td>7.6</td><td>24.8</td></tr><tr><td>1800</td><td>10.9</td><td>35.6</td></tr><tr><td>2500</td><td>12.9</td><td>45.4</td></tr><tr><td>5800</td><td>20.4</td><td>66.8</td></tr></table>	NOMINAL ATTENUATION			MHz	db/100ft	db/100m	900	7.6	24.8	1800	10.9	35.6	2500	12.9	45.4	5800	20.4	66.8
NOMINAL ATTENUATION																			
MHz	db/100ft	db/100m																	
900	7.6	24.8																	
1800	10.9	35.6																	
2500	12.9	45.4																	
5800	20.4	66.8																	
400 Series  50 Ohm Impedance	<table><tr><th colspan="3">NOMINAL ATTENUATION</th></tr><tr><th>MHz</th><th>db/100ft</th><th>db/100m</th></tr><tr><td>900</td><td>3.9</td><td>12.8</td></tr><tr><td>1800</td><td>5.7</td><td>18.6</td></tr><tr><td>2500</td><td>6.8</td><td>22.2</td></tr><tr><td>5800</td><td>10.8</td><td>35.5</td></tr></table>	NOMINAL ATTENUATION			MHz	db/100ft	db/100m	900	3.9	12.8	1800	5.7	18.6	2500	6.8	22.2	5800	10.8	35.5
NOMINAL ATTENUATION																			
MHz	db/100ft	db/100m																	
900	3.9	12.8																	
1800	5.7	18.6																	
2500	6.8	22.2																	
5800	10.8	35.5																	
600 Series  50 Ohm Impedance	<table><tr><th colspan="3">NOMINAL ATTENUATION</th></tr><tr><th>MHz</th><th>db/100ft</th><th>db/100m</th></tr><tr><td>900</td><td>2.5</td><td>8.2</td></tr><tr><td>1800</td><td>3.7</td><td>12.1</td></tr><tr><td>2500</td><td>4.4</td><td>14.5</td></tr><tr><td>5800</td><td>7.3</td><td>23.8</td></tr></table>	NOMINAL ATTENUATION			MHz	db/100ft	db/100m	900	2.5	8.2	1800	3.7	12.1	2500	4.4	14.5	5800	7.3	23.8
NOMINAL ATTENUATION																			
MHz	db/100ft	db/100m																	
900	2.5	8.2																	
1800	3.7	12.1																	
2500	4.4	14.5																	
5800	7.3	23.8																	
900 Series  50 Ohm Impedance	<table><tr><th colspan="3">NOMINAL ATTENUATION</th></tr><tr><th>MHz</th><th>db/100ft</th><th>db/100m</th></tr><tr><td>900</td><td>1.7</td><td>5.6</td></tr><tr><td>1800</td><td>2.5</td><td>8.2</td></tr><tr><td>2500</td><td>2.9</td><td>9.8</td></tr><tr><td>5800</td><td>4.9</td><td>16.0</td></tr></table>	NOMINAL ATTENUATION			MHz	db/100ft	db/100m	900	1.7	5.6	1800	2.5	8.2	2500	2.9	9.8	5800	4.9	16.0
NOMINAL ATTENUATION																			
MHz	db/100ft	db/100m																	
900	1.7	5.6																	
1800	2.5	8.2																	
2500	2.9	9.8																	
5800	4.9	16.0																	

View our Low Loss Coax Cable applications overview in the Resources section of this paper

802.11 Wireless Standards					
IEEE Standard	802.11a	802.11b	802.11g	802.11n	802.11ac (Draft)
Year Released	1999	1999	2003	2009	2011 (Draft)
Frequency	5 GHz	2.4 GHz	2.4 GHz	2.4/5 GHz	5 GHz
Max. Data Rate	54 Mbps	11 Mbps	54 Mbps	600 Mbps	>1 Gbps
Typical Range Indoors*	100 ft.	100 ft.	125 ft.	225 ft.	TBD
Typical Range Outdoors*	400 ft.	450 ft.	450 ft.	825 ft.	TBD

Download the PDF of this reference chart <http://www.l-com.com/content/Article.aspx?Type=L&ID=10044>

dBm to Watts Conversion Chart

dBm	Watts	dBm	Watts	dBm	Watts
0	1.0 mW	16	40 mW	32	1.6 W
1	1.3 mW	17	50 mW	33	2.0 W
2	1.6 mW	18	63 mW	34	2.5 W
3	2.0 mW	19	79 mW	35	3 W
4	2.5 mW	20	100 mW	36	4 W
5	3.2 mW	21	126 mW	37	5 W
6	4 mW	22	158 mW	38	6 W
7	5 mW	23	200 mW	39	8 W
8	6 mW	24	250 mW	40	10 W
9	8 mW	25	316 mW	41	13 W
10	10 mW	26	398 mW	42	16 W
11	13 mW	27	500 mW	43	20 W
12	16 mW	28	630 mW	44	25 W
13	20 mW	29	800 mW	45	32 W
14	25 mW	30	1.0 W	46	40 W
15	32 mW	31	1.3 W	47	50 W

Power Measurement Units:

dBm - decibels relative to one milliwatt

dBW - decibels relative to one Watt


Gain Measurement Units:

dBi - decibels relative to an isotrope

dBd - decibels relative to a dipole

Download the PDF of this reference chart http://www.l-com.com/multimedia/whitepapers/dbm_chart.pdf

THE RADIO SPECTRUM

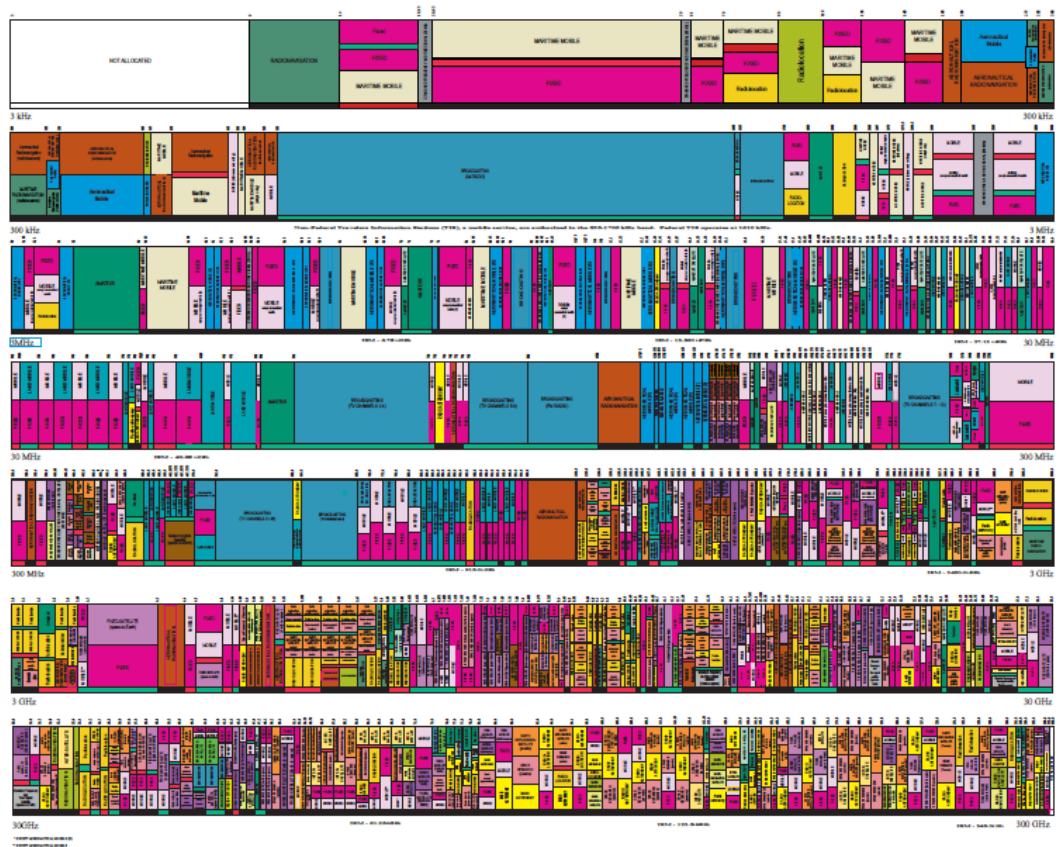

Download the PDF of this reference chart

http://www.ntia.doc.gov/files/ntia/publications/spectrum_wall_chart_aug2011.pdf

Low Loss Coax Cable Applications

What is Low Loss cable?

The term low loss refers to the cables relative low attenuation (loss) over distance. The main difference between standard RG cable and low loss coaxial cable is the shielding. Low loss cable has far better shielding than typical RG style cable thus achieving better low loss characteristics. Additionally, low loss coaxial cables use solid center conductors which offer lower attenuation than stranded conductors that are sometimes found on RG style cables. Low loss coaxial cables are typically used in WLAN, Cellular, PCS, ISM and many other wireless applications.

<p>100 Series 0.109in (2.7mm) Nominal</p>	<p>100 Series - 0.110" OD</p> <ul style="list-style-type: none"> • Drop-in Low Loss equivalent for RG316/174 • Internal equipment wiring • Very short jumper cable assemblies and radio pigtails • Applications requiring easily routed low loss cable 	<p>400 Series 0.405in (10.3mm) Nominal</p>	<p>400 Series - 0.405" OD</p> <ul style="list-style-type: none"> • Drop-in Low Loss equivalent for RG8/9913 • Short jumper cable assemblies • Short antenna cable feeds • Applications requiring easily routed low loss cable
<p>195 Series 0.195in (4.9mm) Nominal</p>	<p>195 Series - 0.195" OD</p> <ul style="list-style-type: none"> • Drop-in Low Loss equivalent for RG58/142 • Internal & Intra equipment wiring • Short antenna and jumper cable assemblies and radio pigtails • Applications requiring easily routed low loss cable 	<p>400UF Series 0.405in (10.3mm) Nominal</p>	<p>400 Ultra Flex Series - 0.405" OD</p> <ul style="list-style-type: none"> • Drop-in Low Loss equivalent for RG-8/9913 • Short jumper cable assemblies • Short antenna cable feeds • Applications requiring maximum flexibility and repeated bending/flexing
<p>200 Series 0.195in (4.9mm) Nominal</p>	<p>200 Series - 0.195" OD</p> <ul style="list-style-type: none"> • Applications requiring easily routed low loss cable • Short jumper cable assemblies • Short antenna cable feeds • Indoor and outdoor applications 	<p>600 Series 0.590in (15.0mm) Nominal</p>	<p>600 Series - 0.590" OD</p> <ul style="list-style-type: none"> • Outdoor applications • Short antenna cable feeds • Medium distance base station and cell tower applications
<p>240 Series 0.240in (6.1mm) Nominal</p>	<p>240 Series - 0.240" OD</p> <ul style="list-style-type: none"> • Short jumper cable assemblies • Short antenna cable feeds • Applications requiring easily routed low loss cable 	<p>900DB Series 0.870in (22.1mm) Nominal</p>	<p>900DB Series - 0.870" OD</p> <ul style="list-style-type: none"> • Outdoor applications • Direct burial applications • Jumper cable assemblies for 1-5/8" & 2-1/4" feeders • Medium antenna cable feeds with no jumpers required • Long distance base station and cell tower applications

Download the PDF of this reference chart <http://www.l-com.com/content/Low-Loss-Coax-Cable-Applications.pdf>

Sources- 1. Webopedia.com

L-com, a global leader in the manufacture of wired and wireless connectivity products, offers a wide range of solutions and unmatched customer service for the electronics and data communications industries. The company's product portfolio includes cable assemblies, connectors, adapters, computer networking components, and custom products, as well as their Hyperlink line of wireless products which include Antennas, RF Amplifiers, Coaxial lightning and surge protectors, and NEMA rated enclosures. L-com's HyperLink wireless products are designed for WiFi, WiMAX, SCADA, 802.11a/b/g/n, RFID and Bluetooth applications. Trusted for over 30 years, L-com, which is headquartered in North Andover, MA, is ISO 9001: 2008 certified and many of its products are UL® recognized. www.l-com.com

For more information, contact your L-com sales representative at 1-800-343-1455 or e-mail sales@L-com.com.

Corporate Headquarters and Fulfillment Facility

45 Beechwood Drive

North Andover, MA 01845

US Cable Assembly Manufacturing Facility

1755 Osgood Street

North Andover, MA 01845

Far East Manufacturing and Fulfillment Facility

7 ChunHui Road, SIP Building 1

Suzhou, Jiangsu, China P.C.: 215121

Wireless Manufacturing and Fulfillment Facility

1201 Clint Moore Road

Boca Raton, FL 33487