
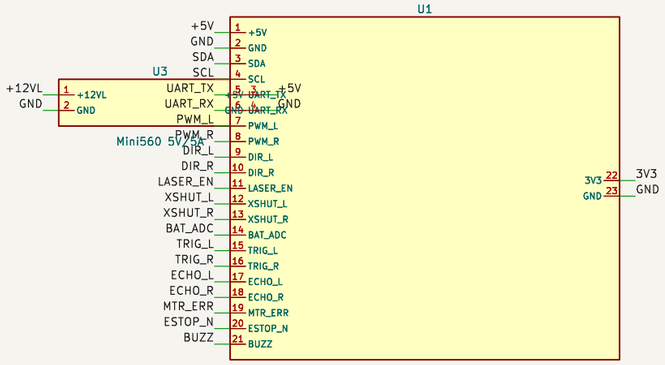
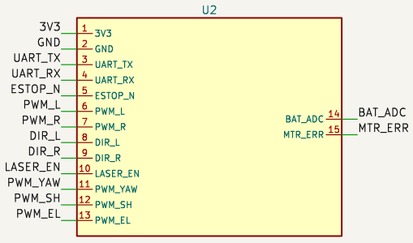

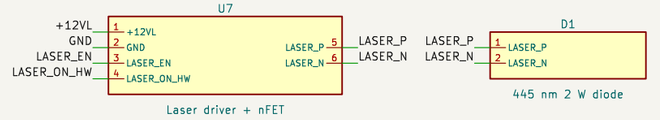



































Laser safety: Pi EN AND hardware key lock; e-stop kills motors+laser
Drive: 2x MD13S, 8 wheels; Sensors: 2x HC-SR04, 2x VL53L0X (I2C)
3S LiPo -> fuse/switch -> INA219 shunt -> buck 5V -> Pi 5 + ESP32

**Semi-Autonomous Weeding Robot**


Sheet: /
File: weed_rover_electrical.kicad_sch











**Title: Weed rover electronics**

Date: 2026-10-21
9.0.8

**Rev: 1**
Id: 1/1