






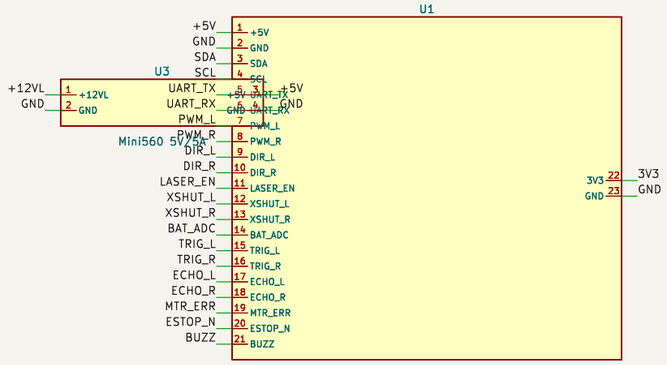


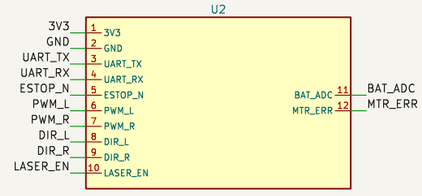





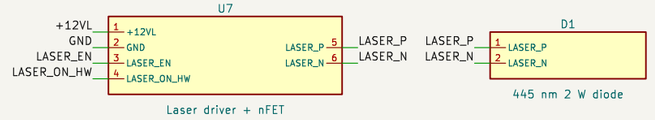





















Laser safety: Pi EN AND hardware key lock; e-stop kills motors+laser
Drive: 2x MD13S, 8 wheels; Sensors: 2x HC-SR04, 2x VL53L0X (I2C)
3S LiPo -> fuse/switch -> INA219 shunt -> buck 5V -> Pi 5 + ESP32

Semi-Autonomous Weeding Robot

Sheet: /
File: weed_rover_electrical.kicad_sch

Title: Weed rover electronics

Size: A3	Date: 2026-10-21	**Rev: 1**
KiCad E.D.A. 9.0.8		Id: 1/1