


FSOT Kennedy-Chua node (BOM of FSOT-Chua-Circuit) — one TL082 per node

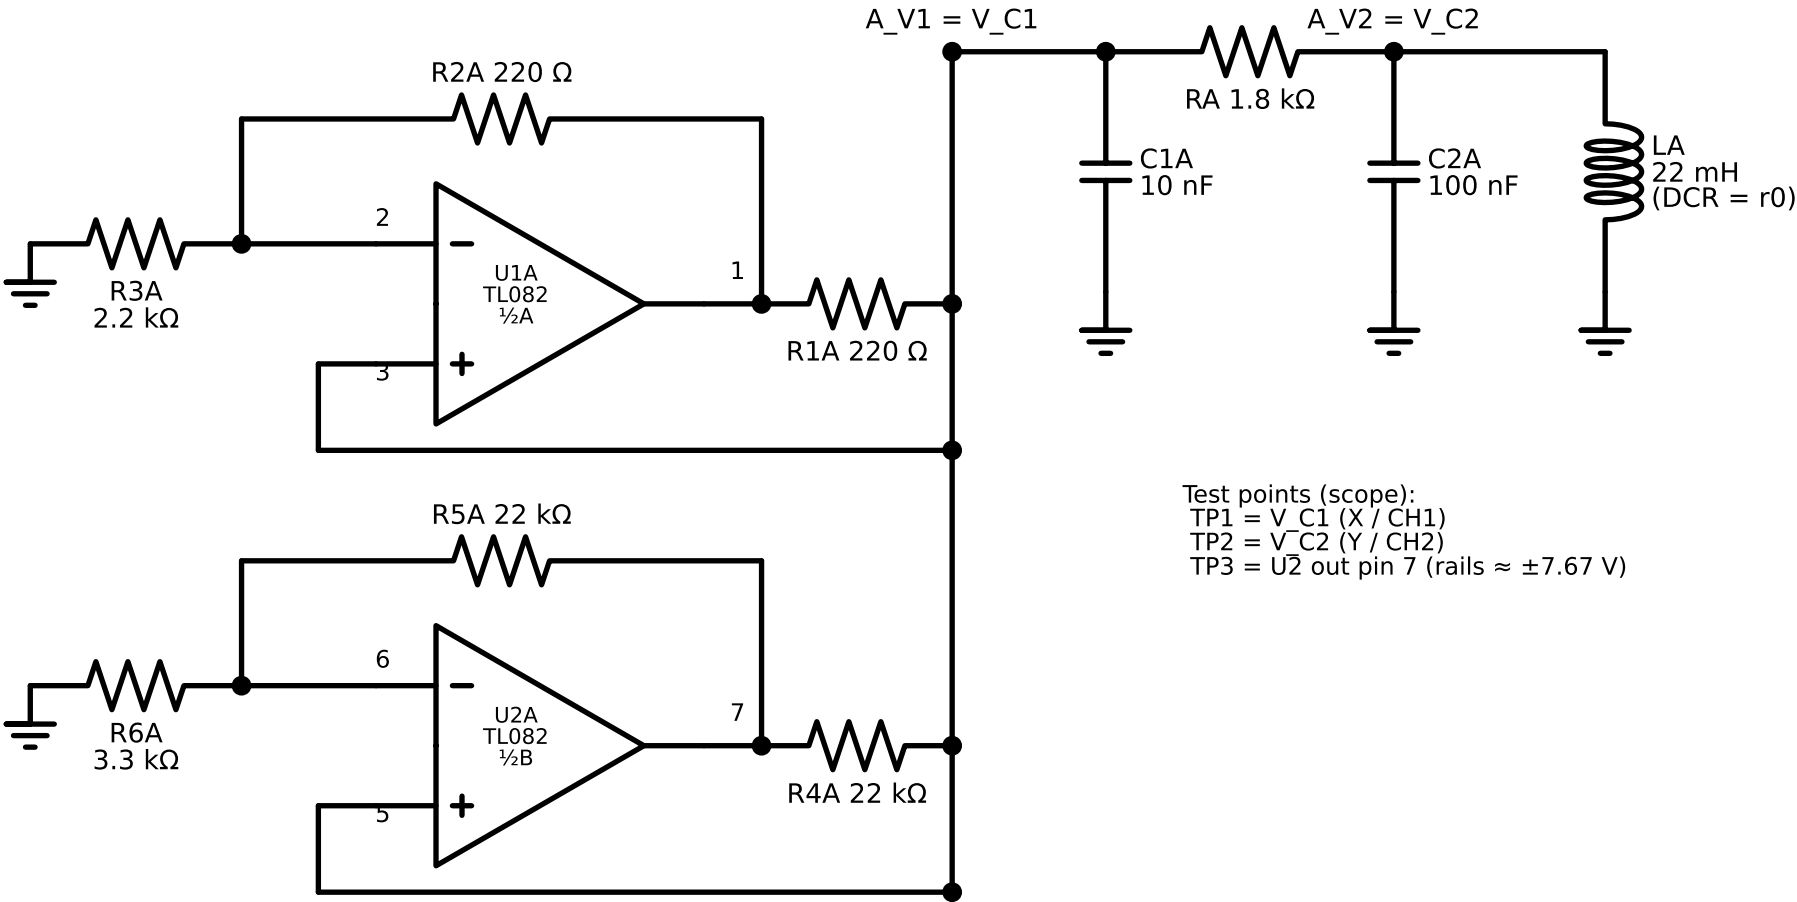

TL082 (DIP-8, notch left, pin 1 bottom-left when viewed from top): 1 OUT A · 2 IN- A · 3 IN+ A · 4 V- · 5 IN+ B · 6 IN- B · 7 OUT B · 8 V+
Supply: ±9.19 V (SPICE-calibrated with the TI TL082 macromodel so U2 saturates at Esat = 23/3 V → Bp1 = 1 V); 100 nF from pin 8 and pin 4 to GND.
741 alternative: two 741s per node (U1, U2): pin 3 = +, pin 2 = -, pin 6 = out, pin 7 = V+, pin 4 = V-; rails ±9.66 V (SPICE-calibrated). Measure Esat and trim rails.