



FSOT Kennedy-Chua 3-node ring: coupling Rc between V_C1 nets (A-B, B-C, C-A). $\sigma = \alpha R/R_c$; $\sigma = \varphi^2 \rightarrow R_c = 6875.39\ \Omega$ (6.8 k Ω + 75 Ω)


Node A

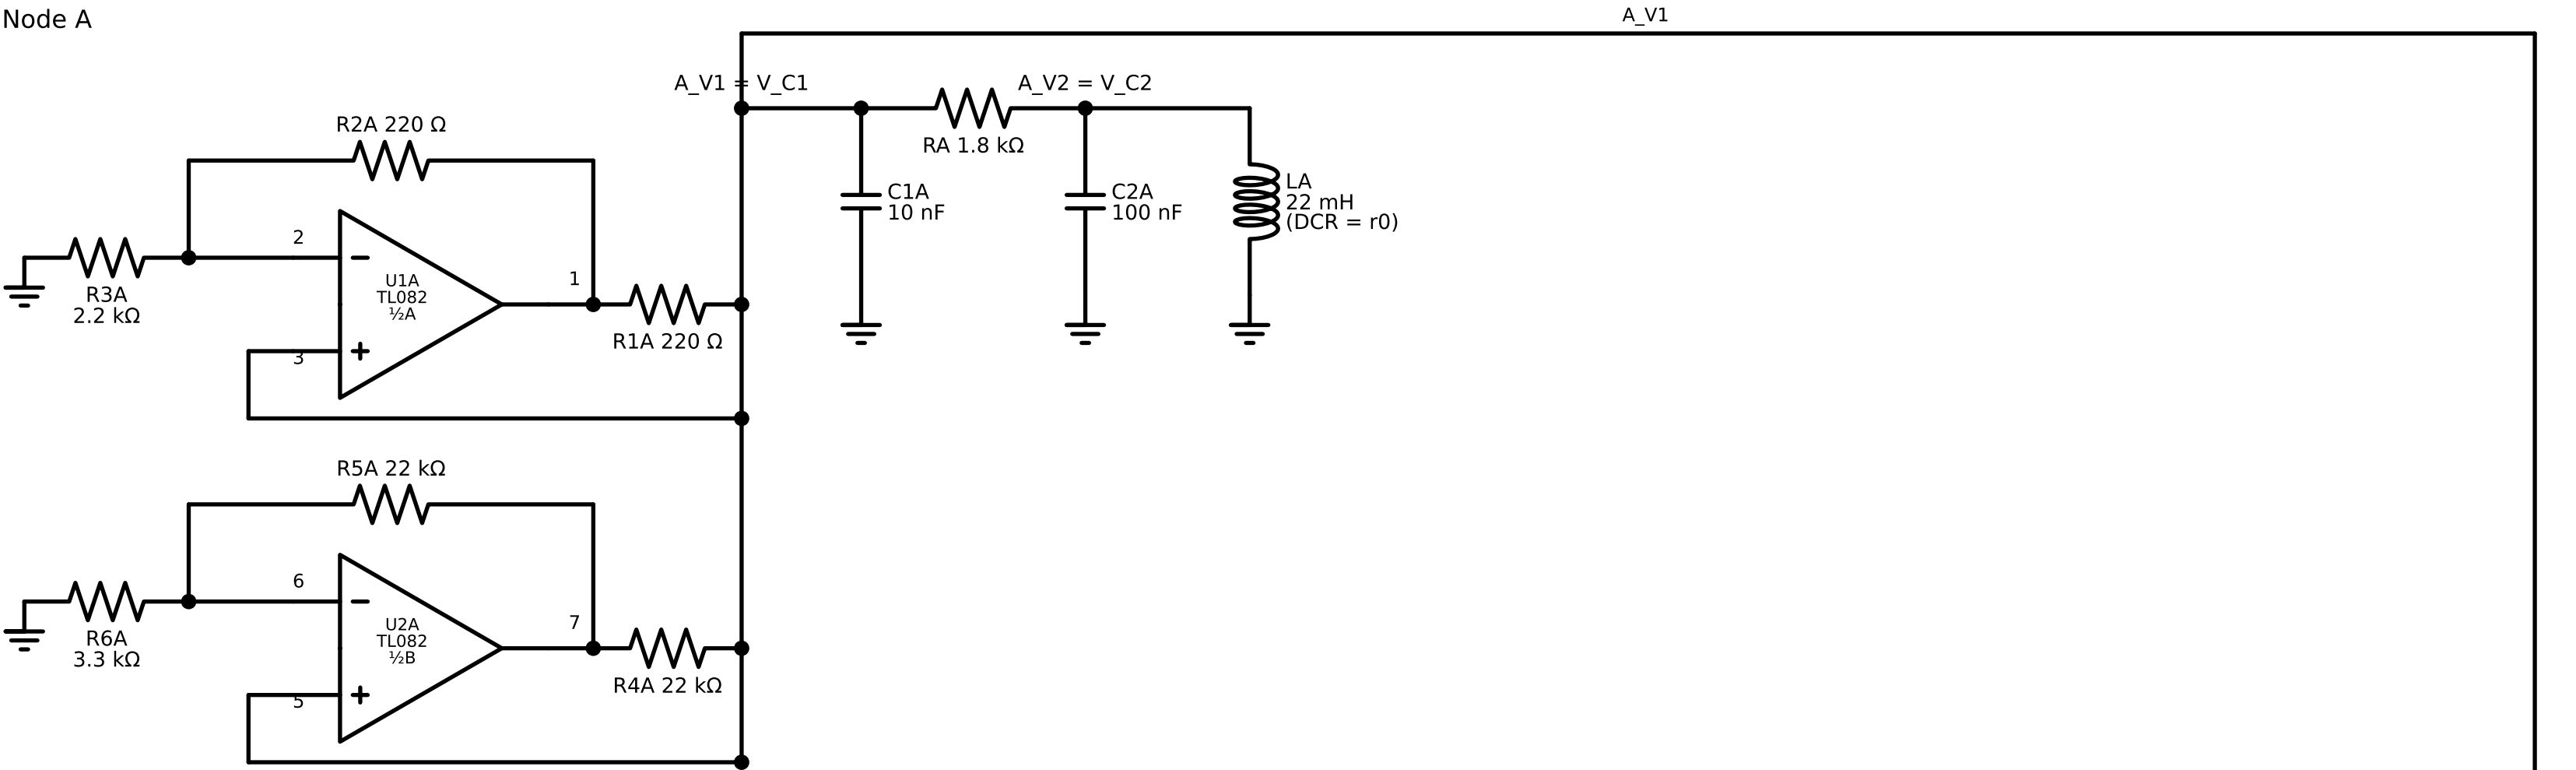

Node B

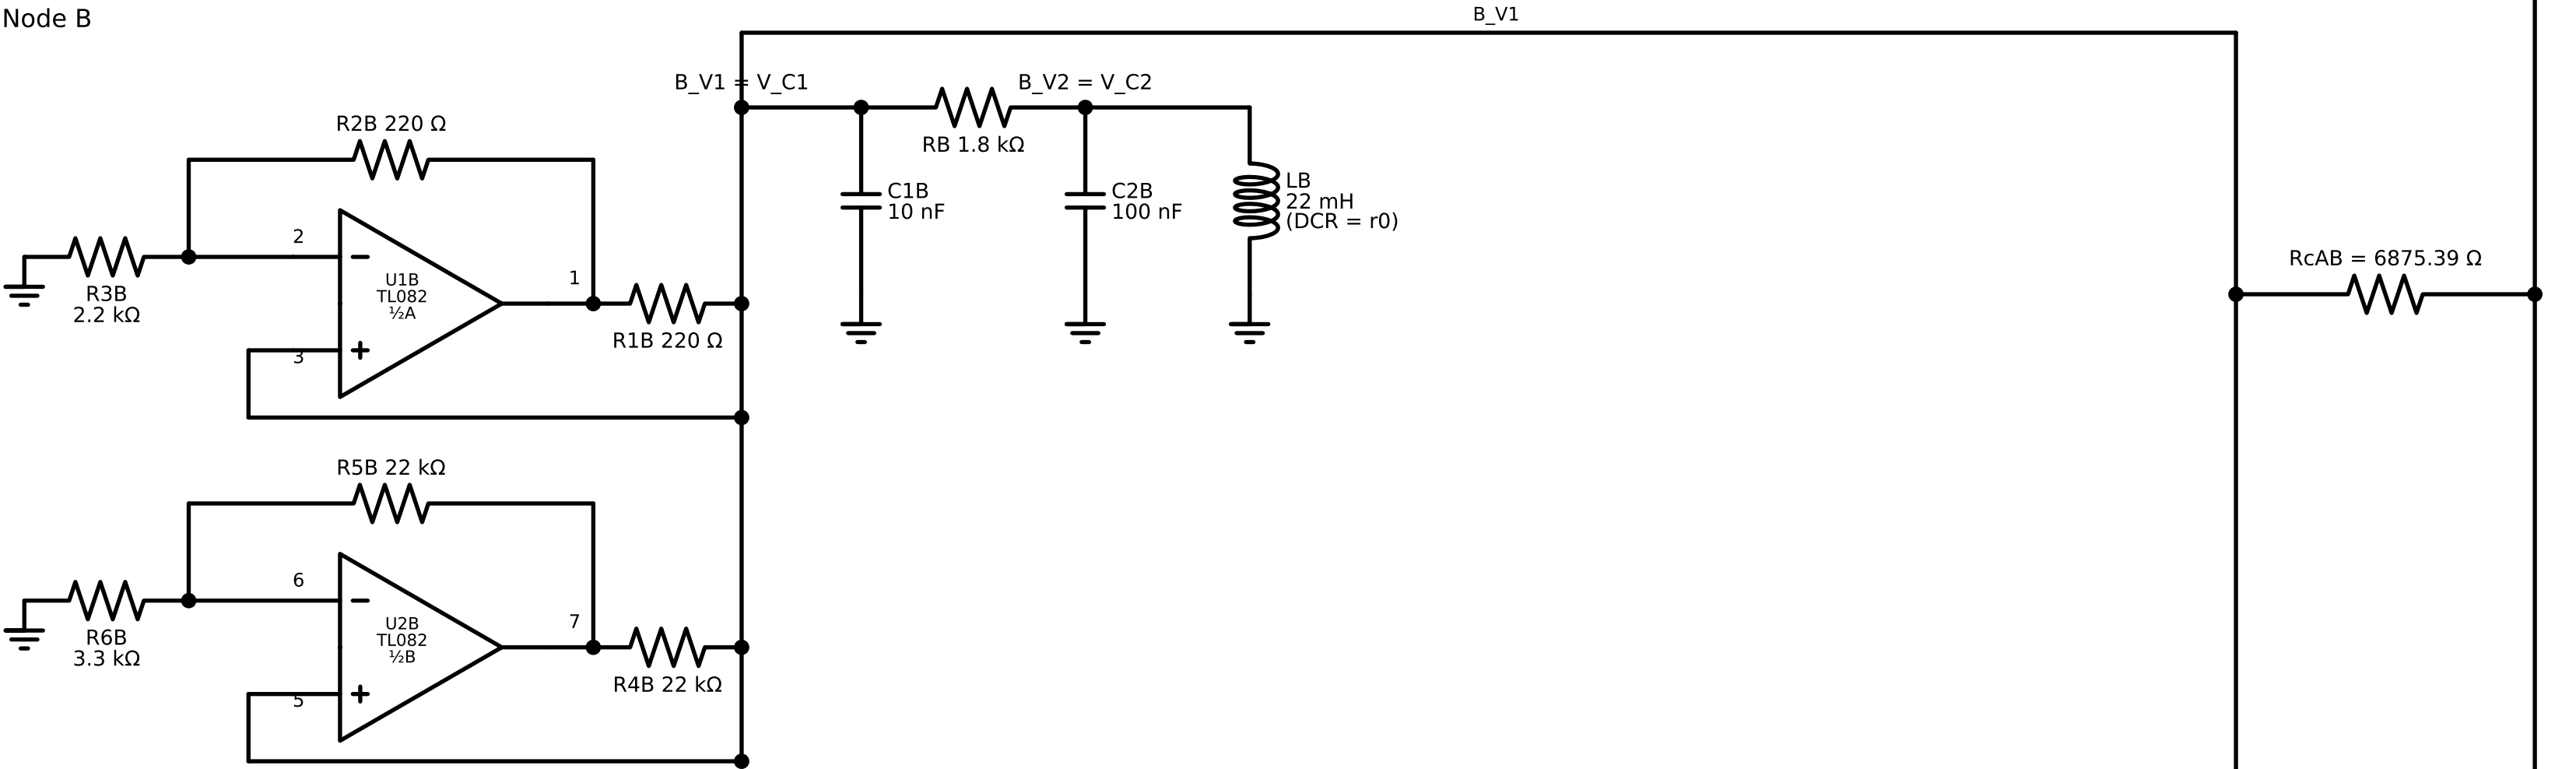

Node C

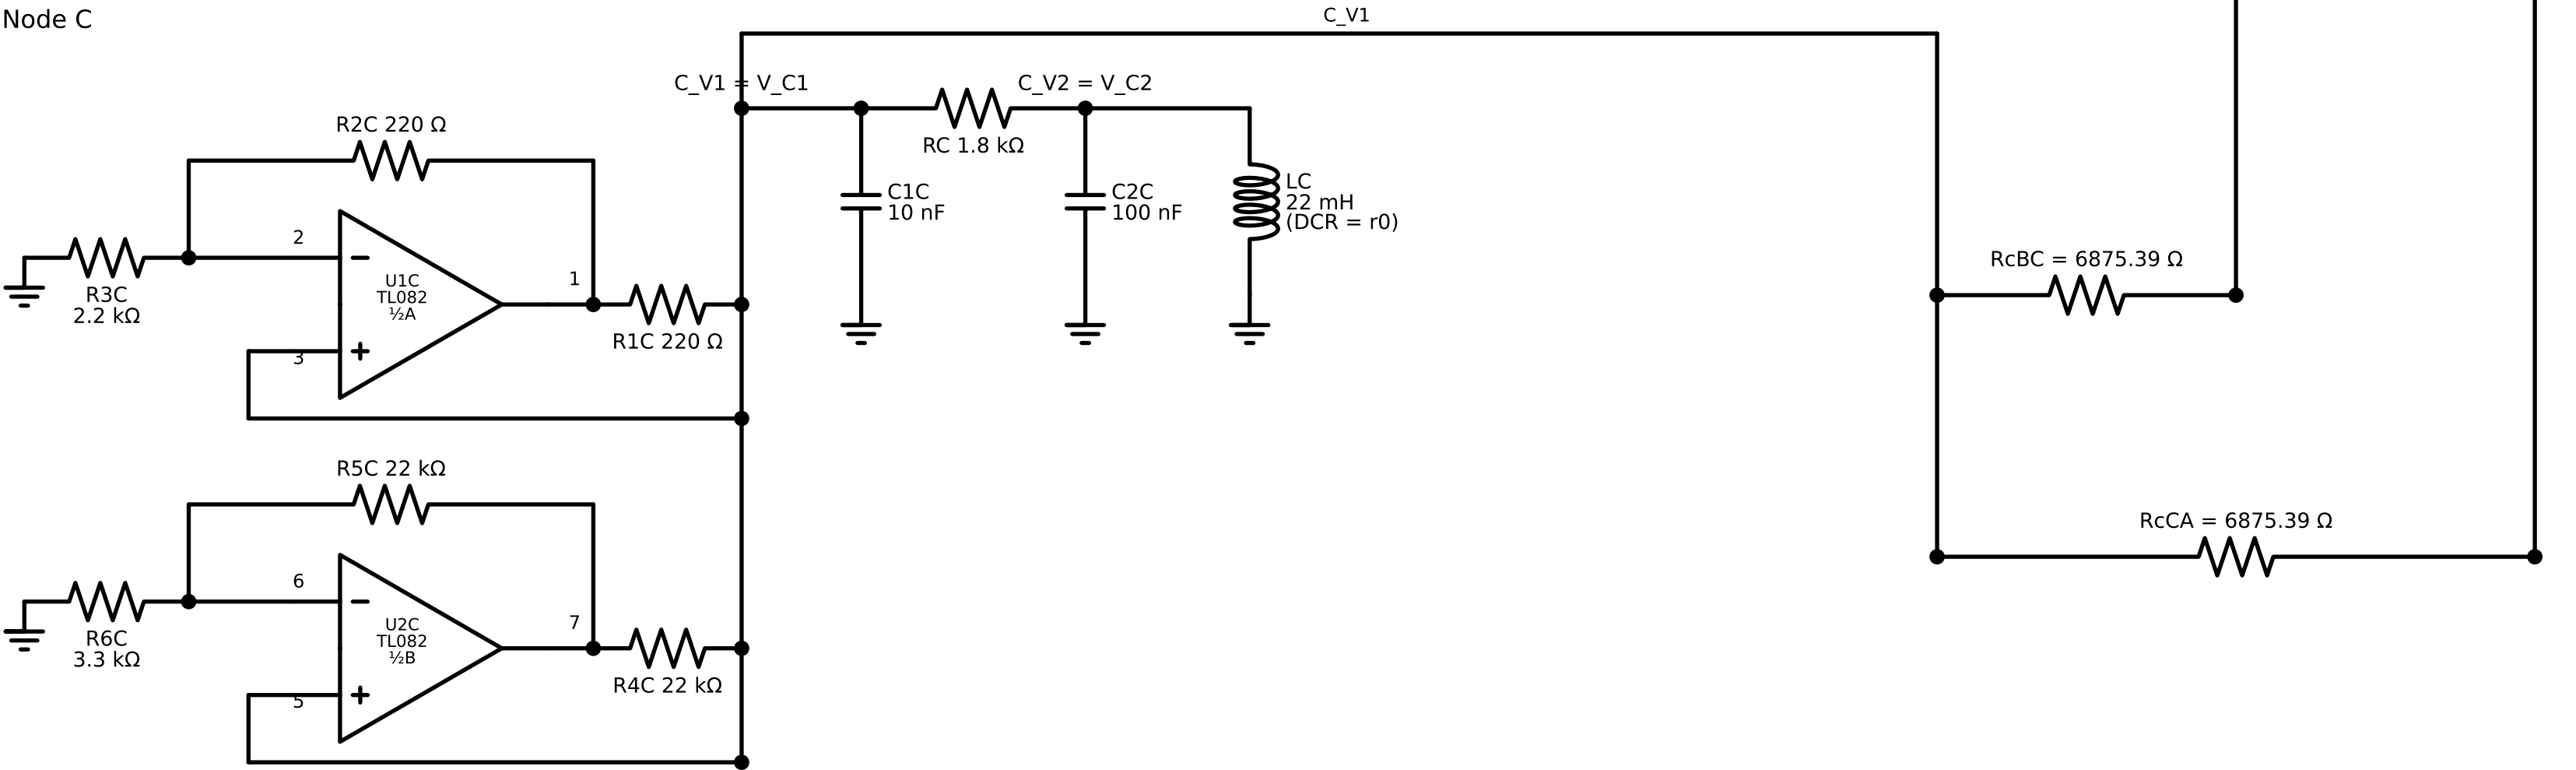

TL082 (DIP-8, notch left, pin 1 bottom-left when viewed from top): 1 OUT A · 2 IN- A · 3 IN+ A · 4 V- · 5 IN+ B · 6 IN- B · 7 OUT B · 8 V+
Supply: ±9.19 V (SPICE-calibrated with the TI TL082 macromodel so U2 saturates at Esat = 23/3 V → Bp1 = 1 V); 100 nF from pin 8 and pin 4 to GND.
741 alternative: two 741s per node (U1, U2): pin 3 = +, pin 2 = -, pin 6 = out, pin 7 = V+, pin 4 = V-; rails ±9.66 V (SPICE-calibrated). Measure Esat and trim rails.

A_V1

B_V1

C_V1

Gate values: open ($\sigma=0$) · 20 k Ω ($\sigma=0.9$) · 18 k Ω ($\sigma=1$) · 11 124.61 Ω ($\sigma=\varphi$; 10 k + 1.13 k E96) · 6 875.39 Ω ($\sigma=\varphi^2$; 6.8 k + 75 Ω)
Build each node exactly as the single-node schematic; one TL082 per node; common GND and ±9.19 V rails.