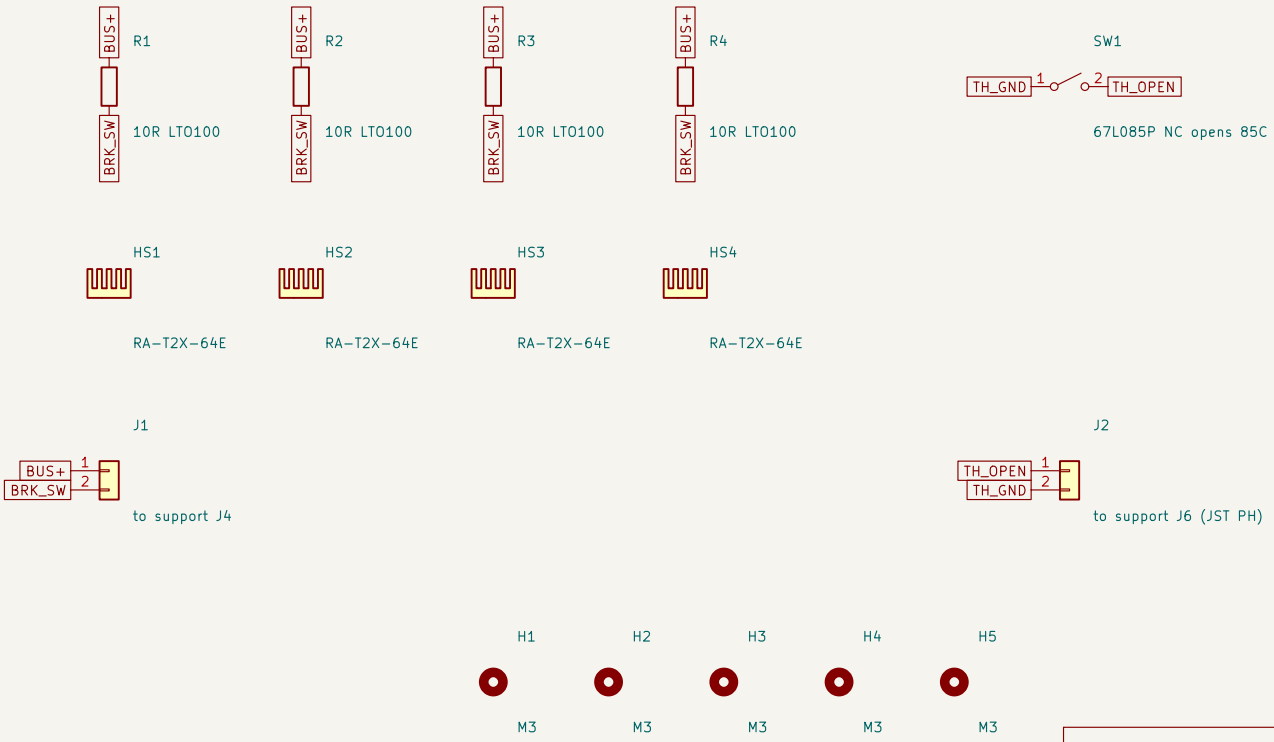


2.5 ohm bank for the support board chopper; sizing in brake_sizing.py

Sheet: /
File: BrakeResistor.kicad_sch

Title: X1 brake resistor board

Size: A4 | Date: 2026-11-02 | **Rev: B**
KiCad E.D.A. 10.0.7 | Id: 1/1

Brake resistor bank for the X1 support board chopper (Q3). 4 x 10 ohm LTO100 in parallel = 2.5 ohm.

J1 -> support J4 (1 = BUS+, 2 = BRK_SW), 16 AWG pair. J2 -> support J6 (JST PH to PH, 1 = TH_OPEN, 2 = GND).

Each R on its own Ohmite RA-T2X-64E with silicone grease, M3 screw 1 Nm. SW1 (67L085P, plastic bracket)

shares R4's screw on the far face of HS4's web. SW1 opens at 85 +/- 5 C: support blocks forced discharge.