BAZIL UDDIN KHAN

24K-0559

BAZIL UDDIN KHAN

BSCS-1H

CISCO PACKET TRACER:

1).

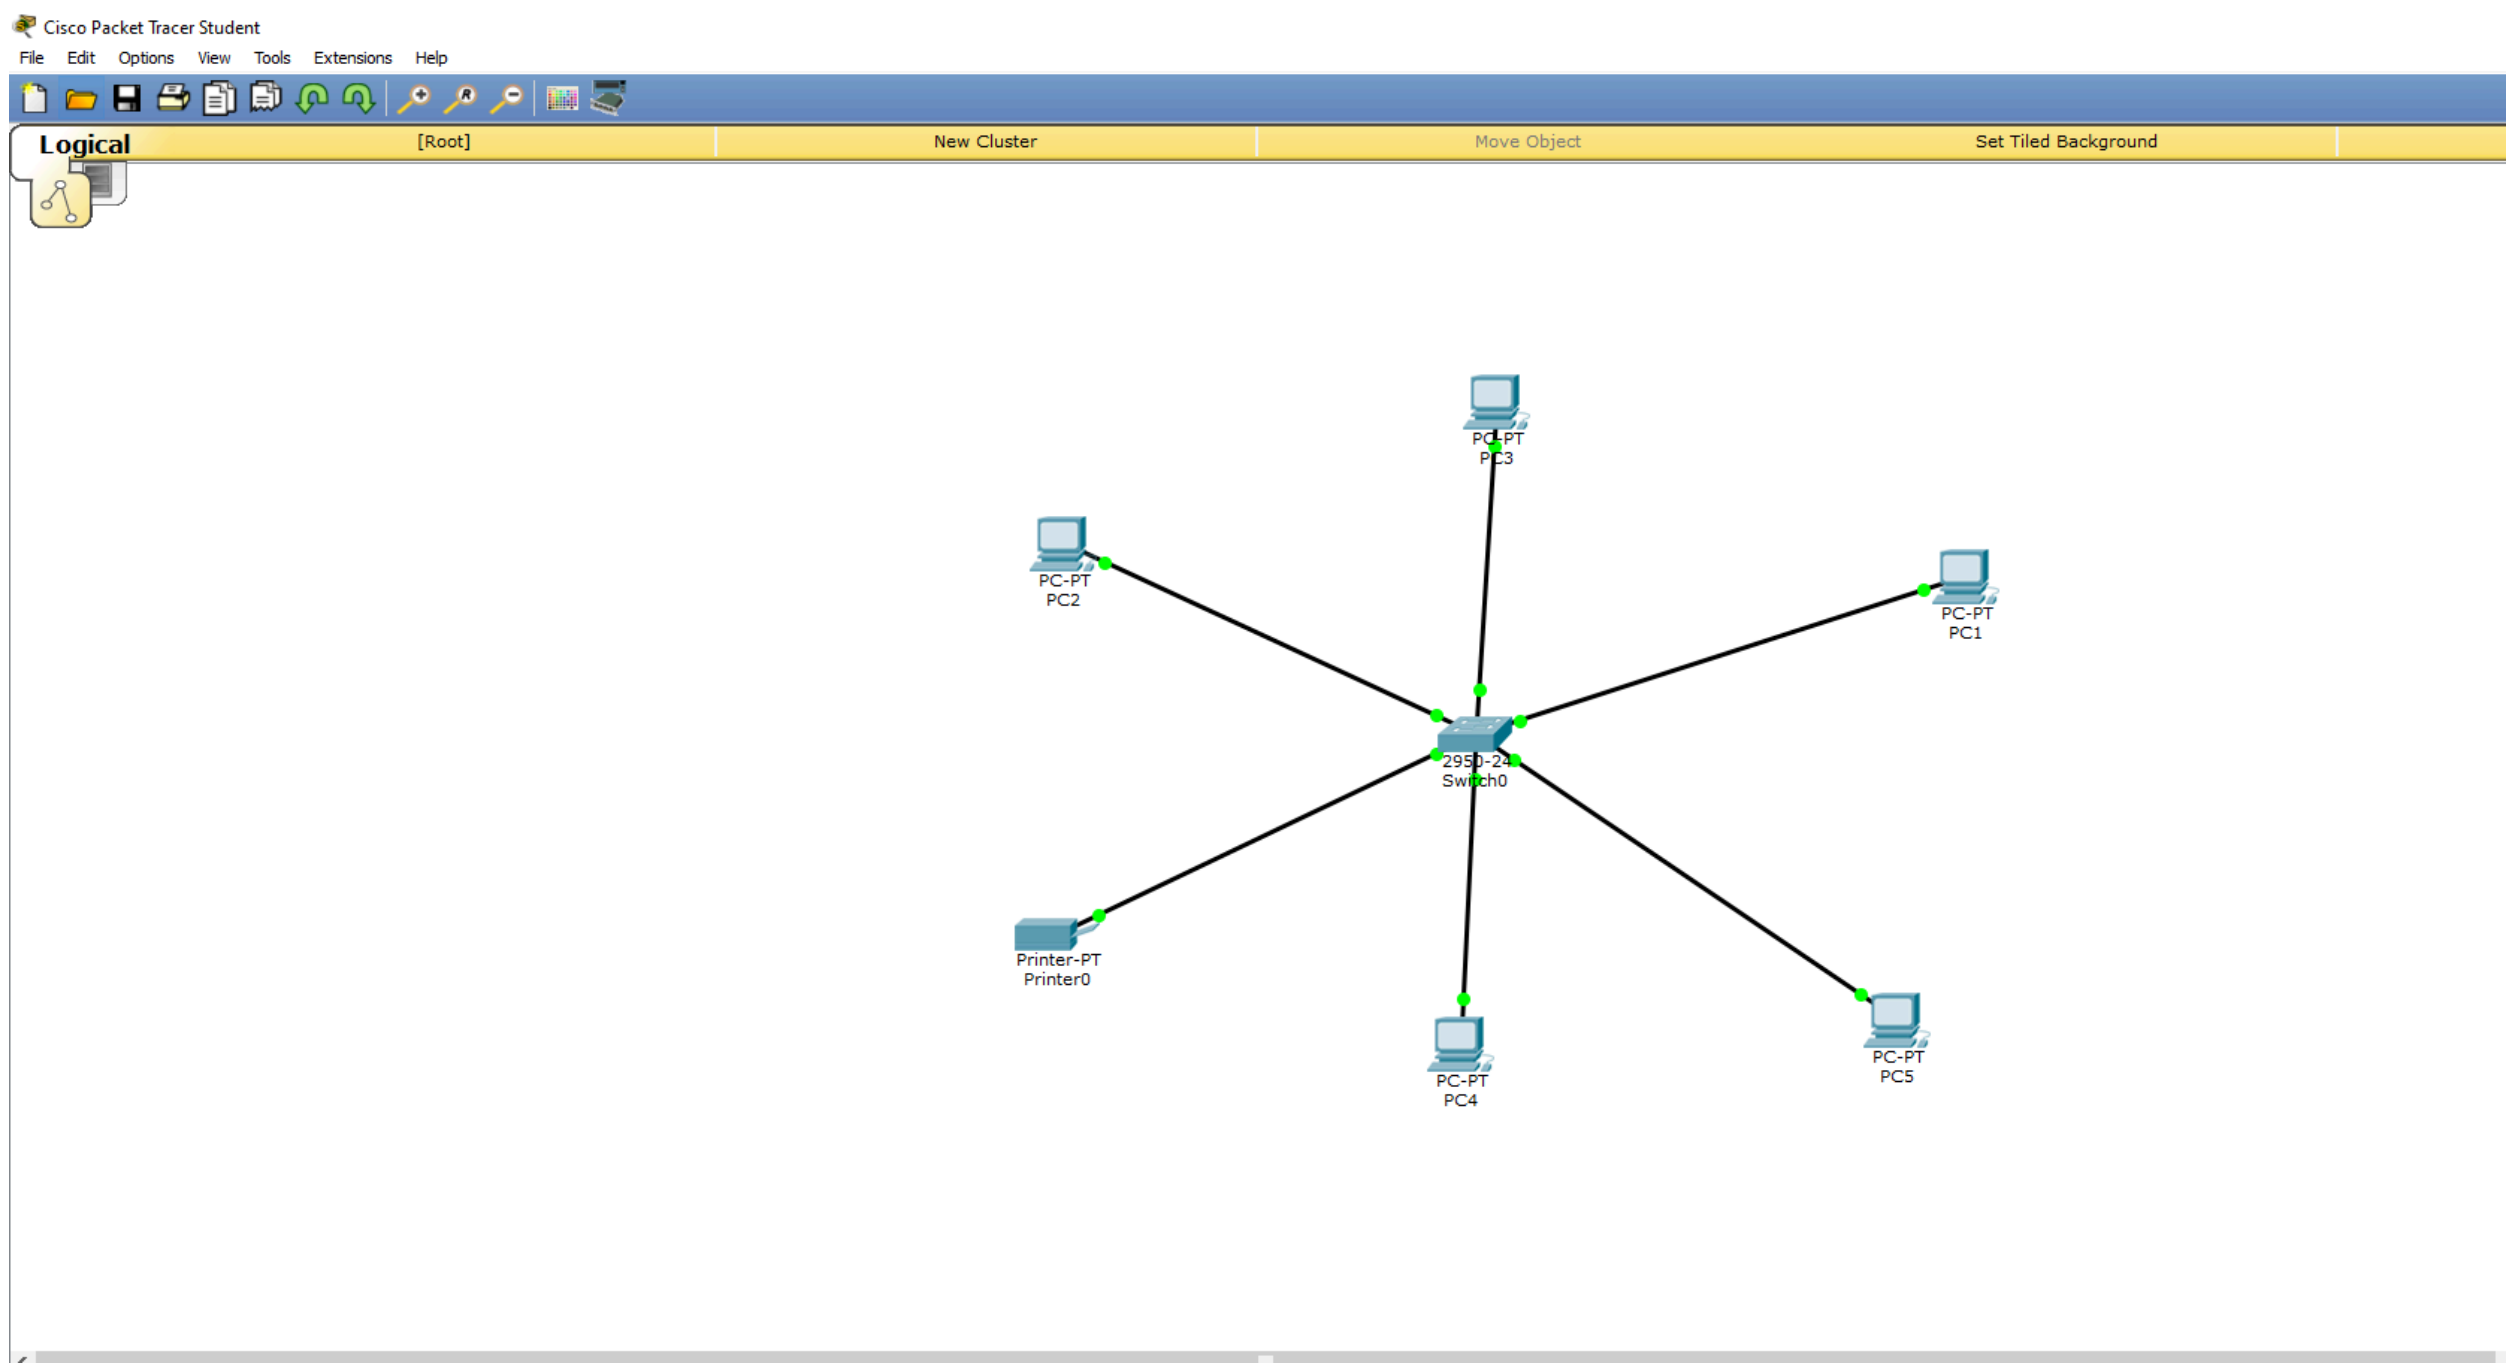

This steps show that there are 5 laptops and 1 printer and one switch that are connected to switch green signal demonstrate that they have identified the networks and can further configure. To establish connection.

2).

PRINTER:

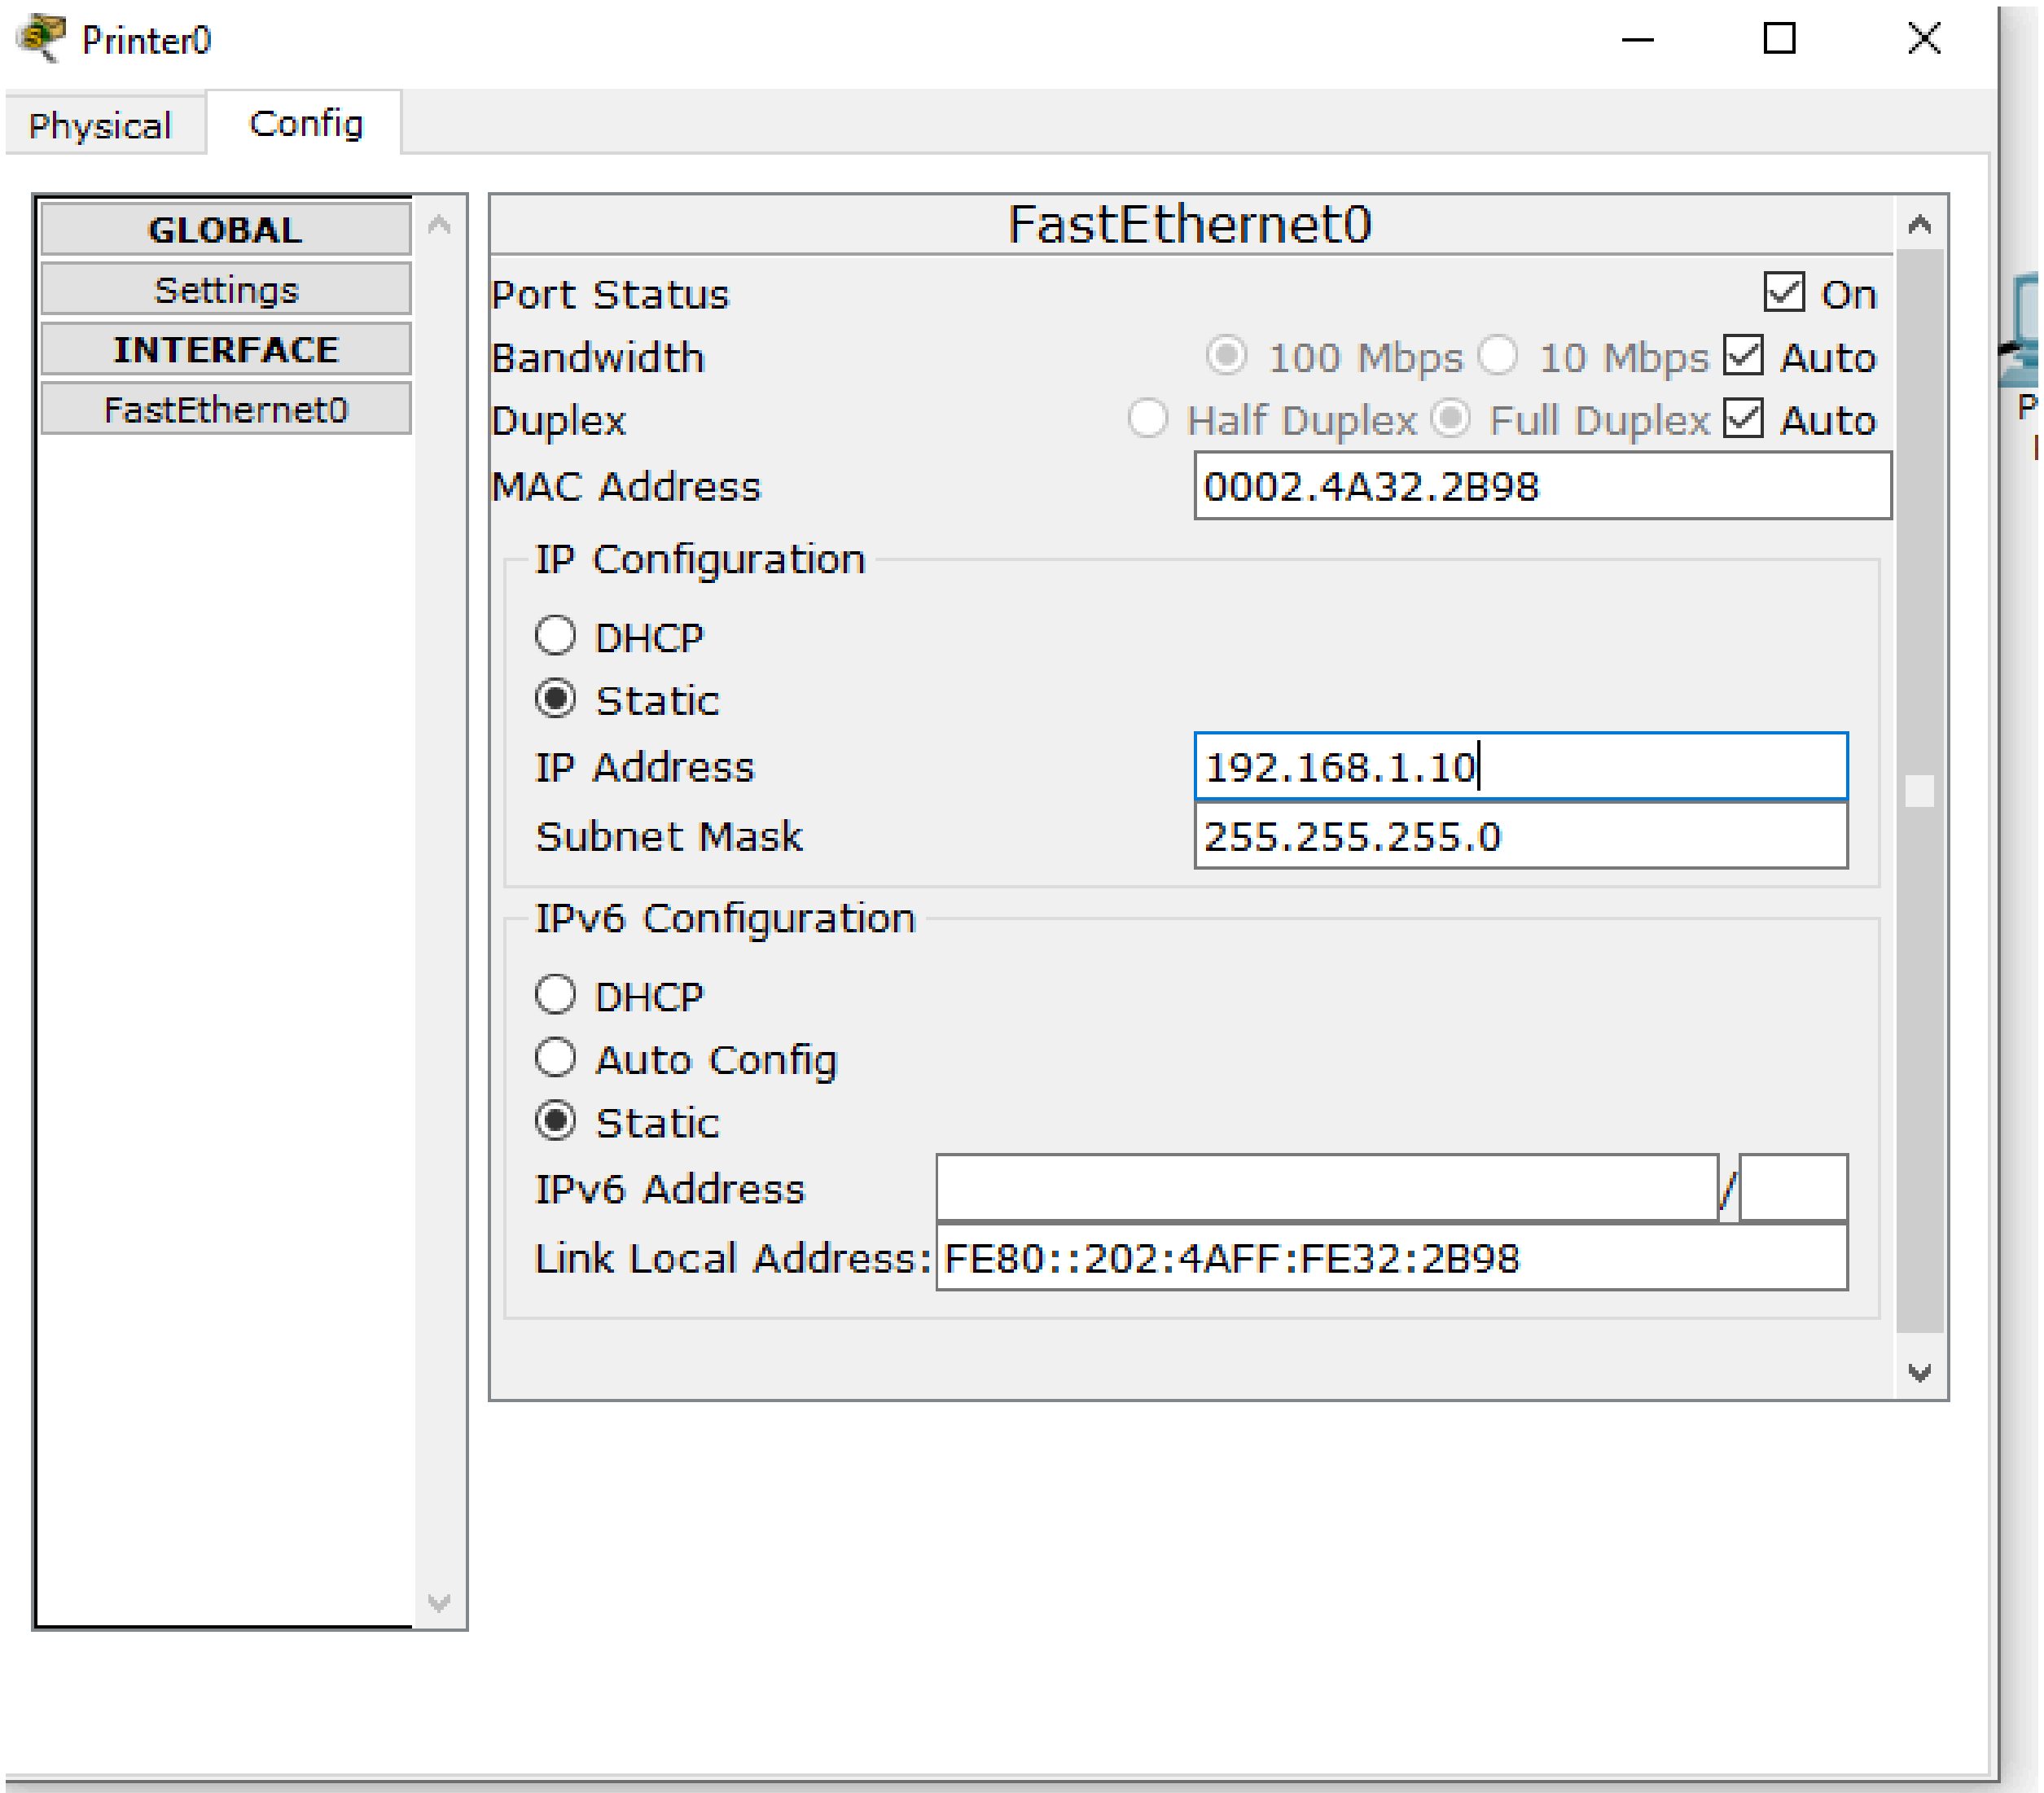
Printer0
Physical
Config
GLOBAL
Settings
INTERFACE
FastEthernet0
FastEthernet0
Port Status
On
Bandwidth
100 Mbps
10 Mbps
Auto
Duplex
Half Duplex
Full Duplex
Auto
MAC Address
0002.4A32.2B98
IP Configuration
DHCP
Static
IP Address
192.168.1.10
Subnet Mask
255.255.255.0
IPv6 Configuration
DHCP
Auto Config
Static
IPv6 Address
/
Link Local Address:
FE80::202:4AFF:FE32:2B98

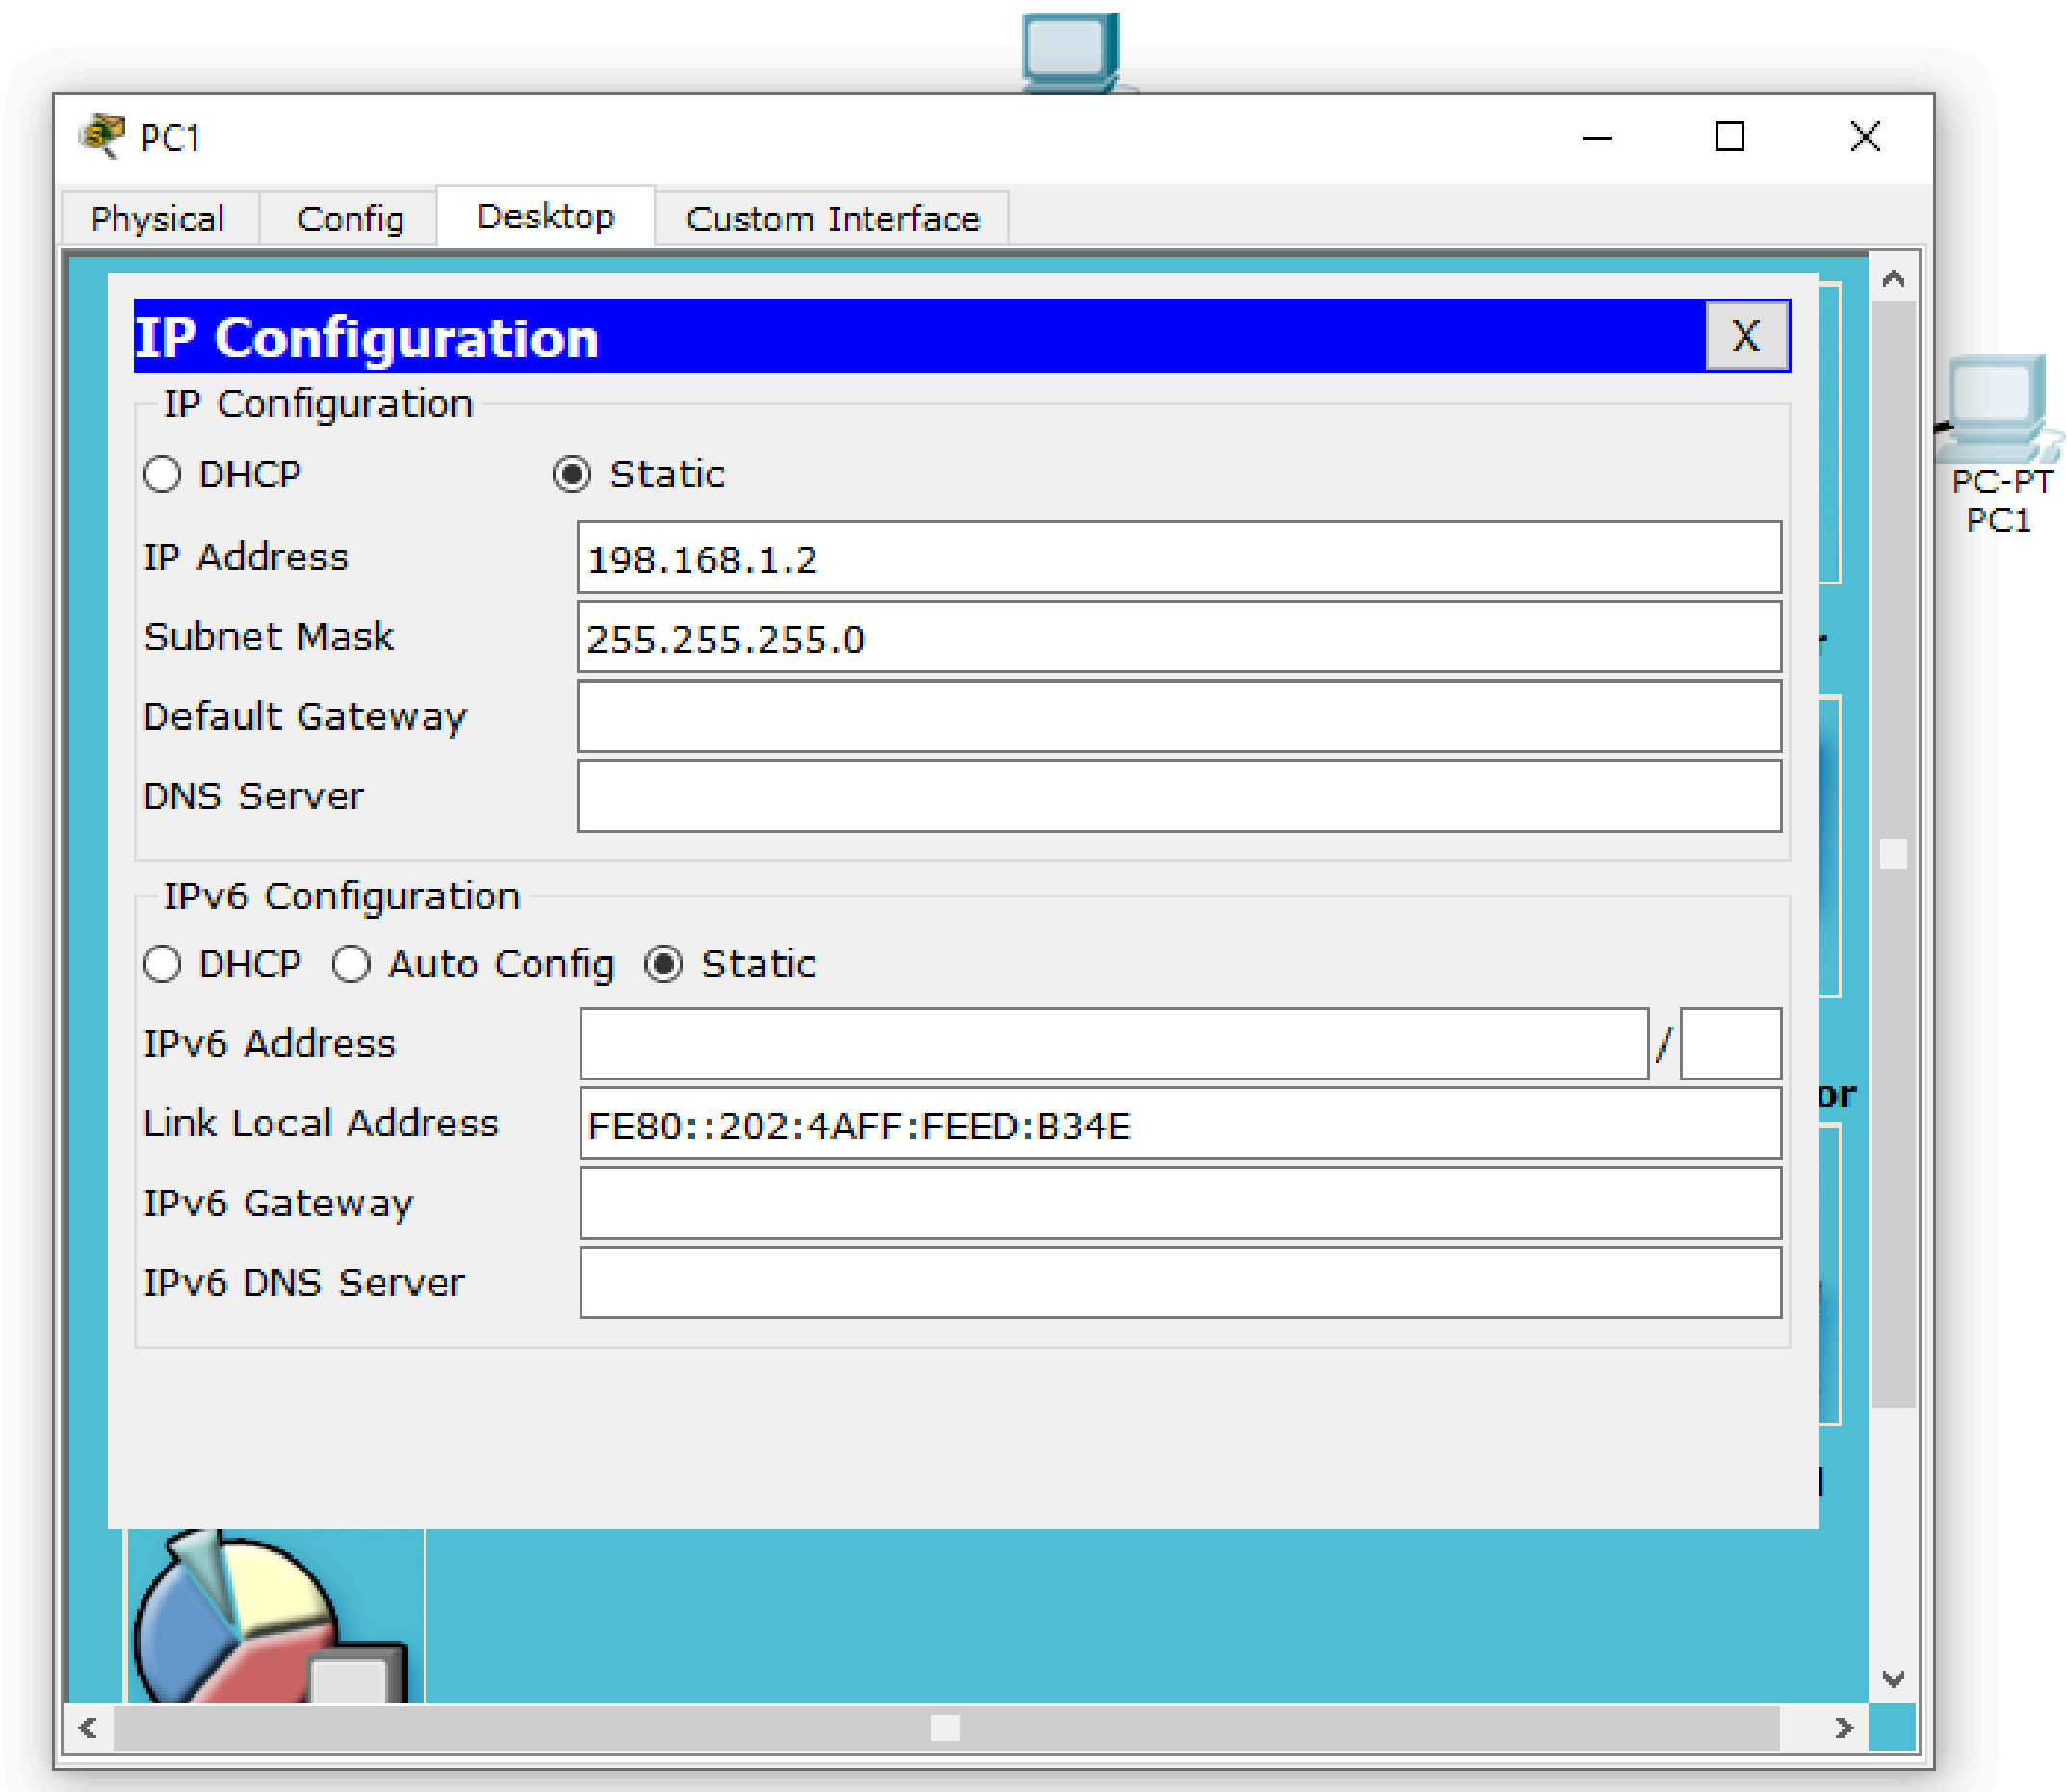
PC1
Physical
Config
Desktop
Custom Interface
IP Configuration
X
IP Configuration
DHCP
Static
IP Address
198.168.1.2
Subnet Mask
255.255.255.0
Default Gateway
DNS Server
IPv6 Configuration
DHCP
Auto Config
Static
IPv6 Address
/
Link Local Address
FE80::202:4AFF:FEED:B34E
IPv6 Gateway
IPv6 DNS Server
PC-PT
PC1

3).

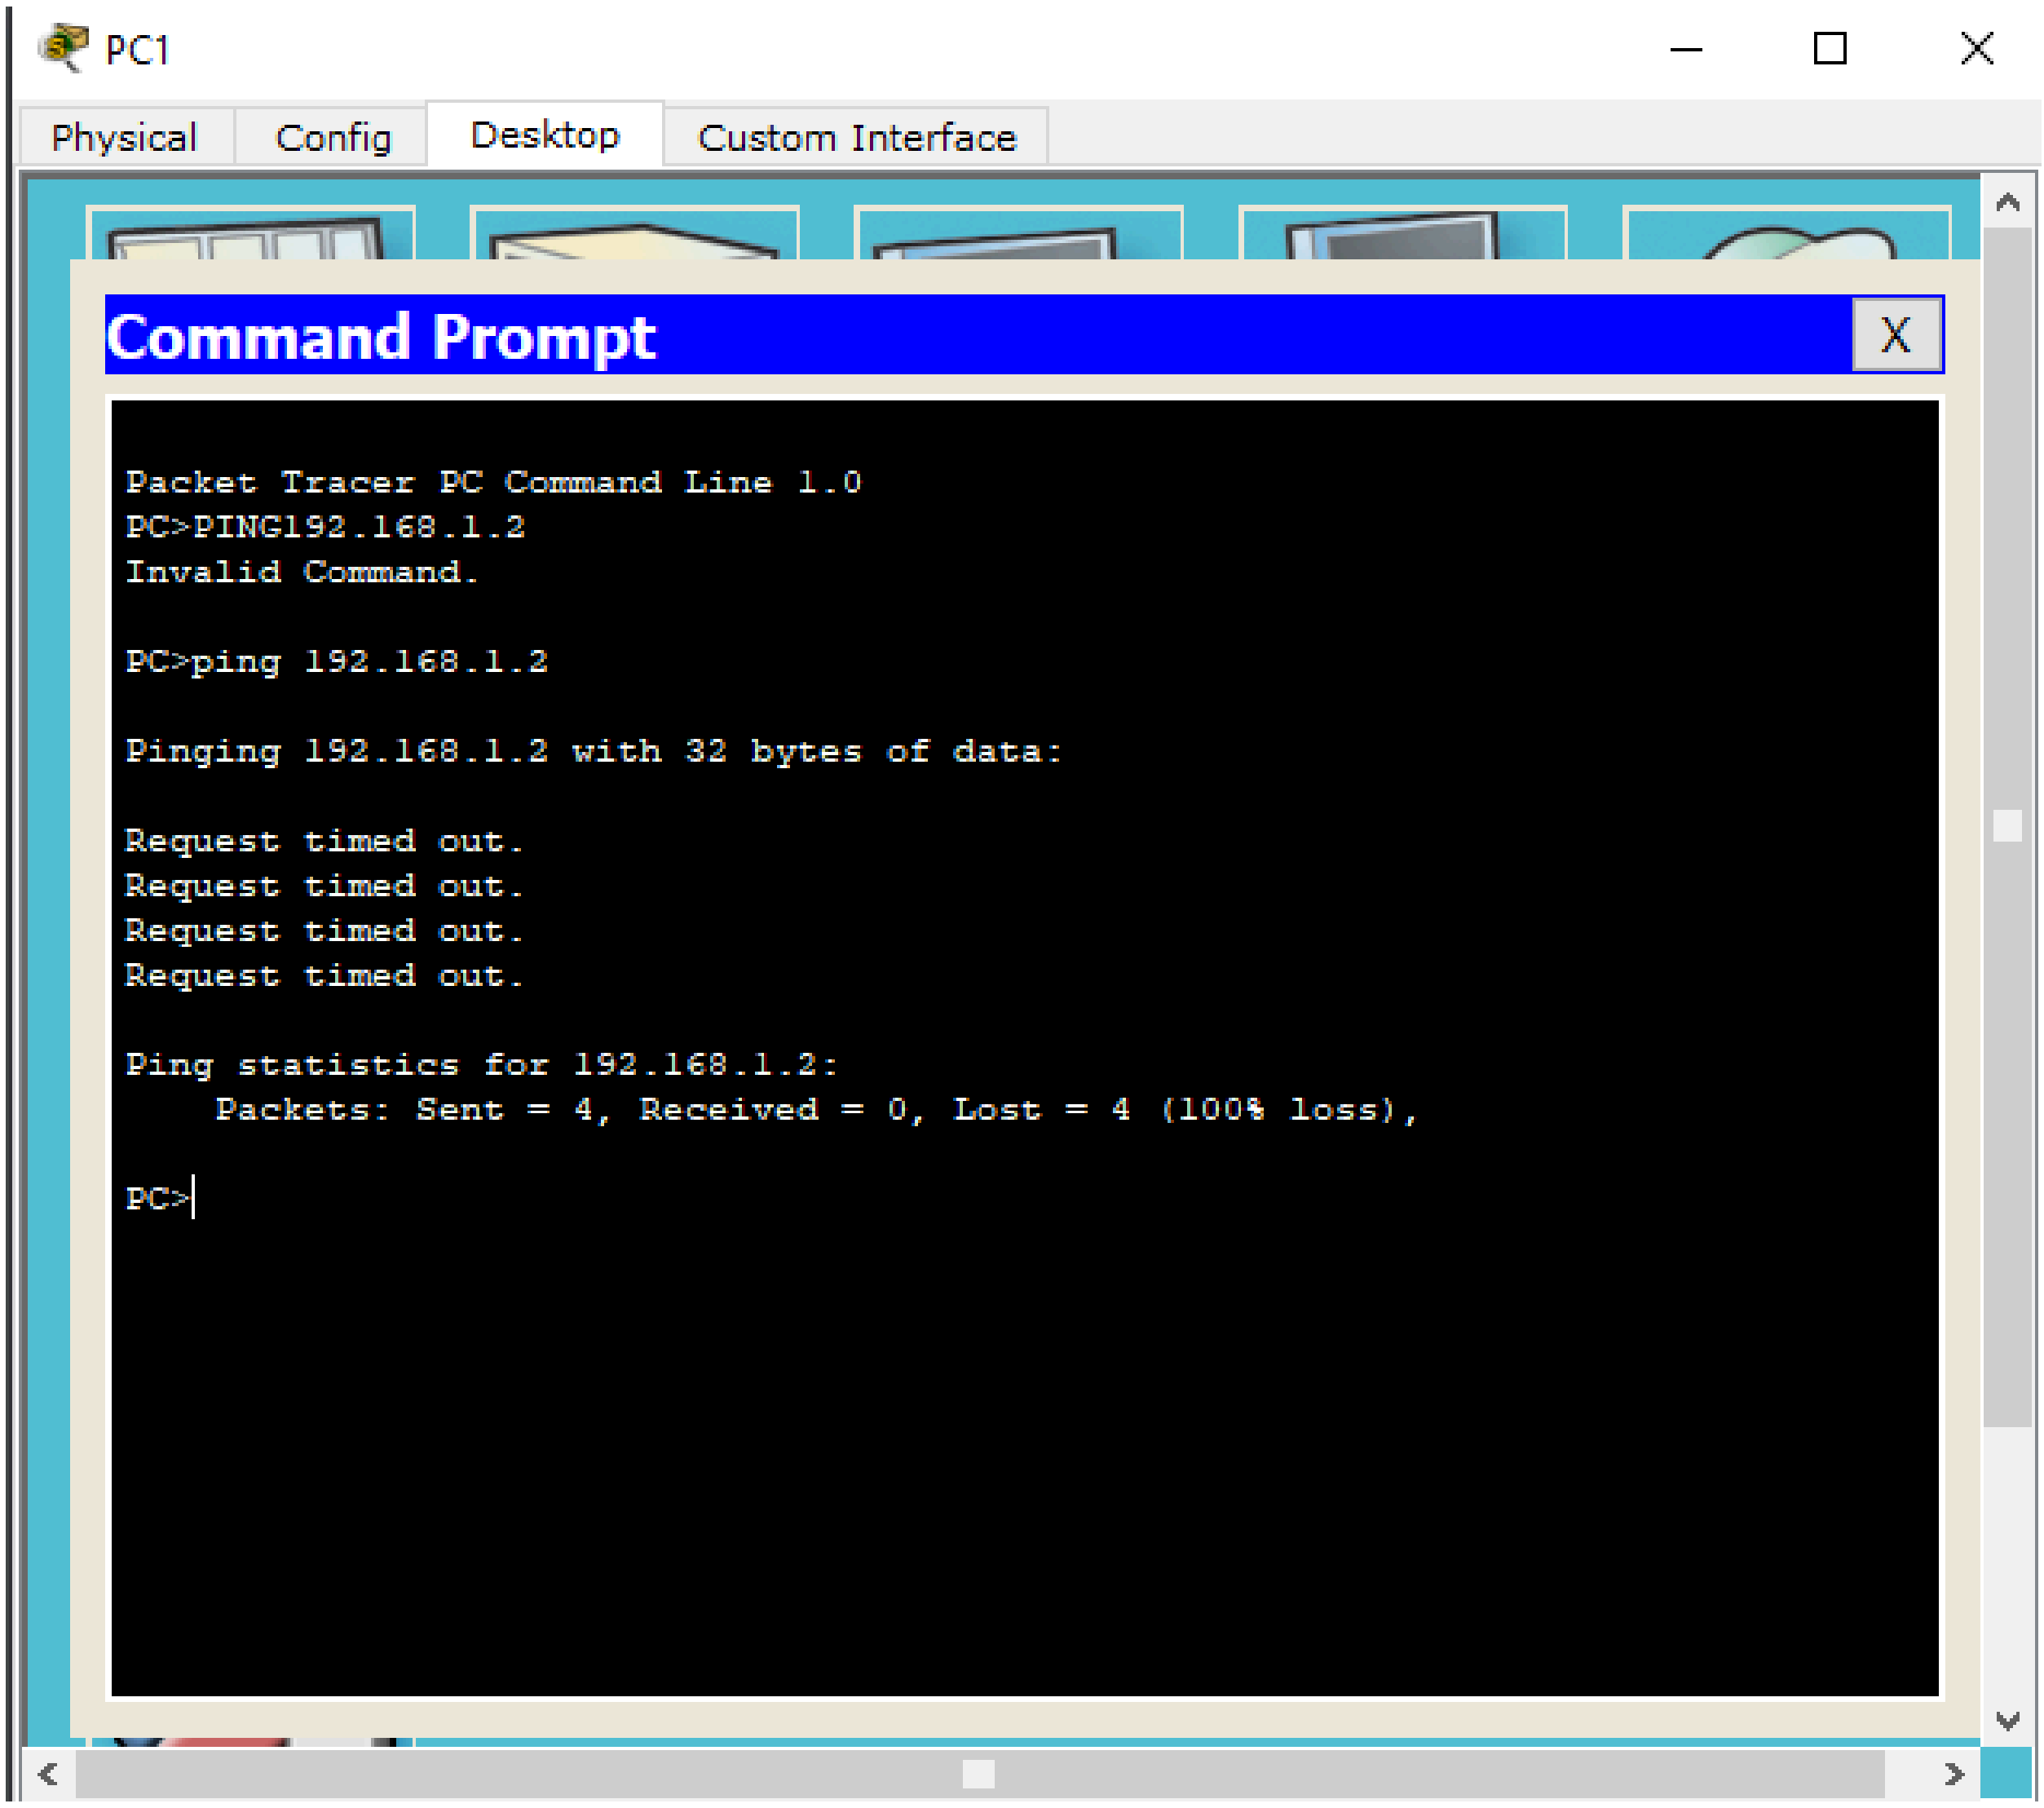
PC1
Physical
Config
Desktop
Custom Interface
Command Prompt
X
Packet Tracer PC Command Line 1.0
PC>PING192.168.1.2
Invalid Command.
PC>ping 192.168.1.2
Pinging 192.168.1.2 with 32 bytes of data:
Request timed out.
Request timed out.
Request timed out.
Request timed out.
Ping statistics for 192.168.1.2:
Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),
PC>

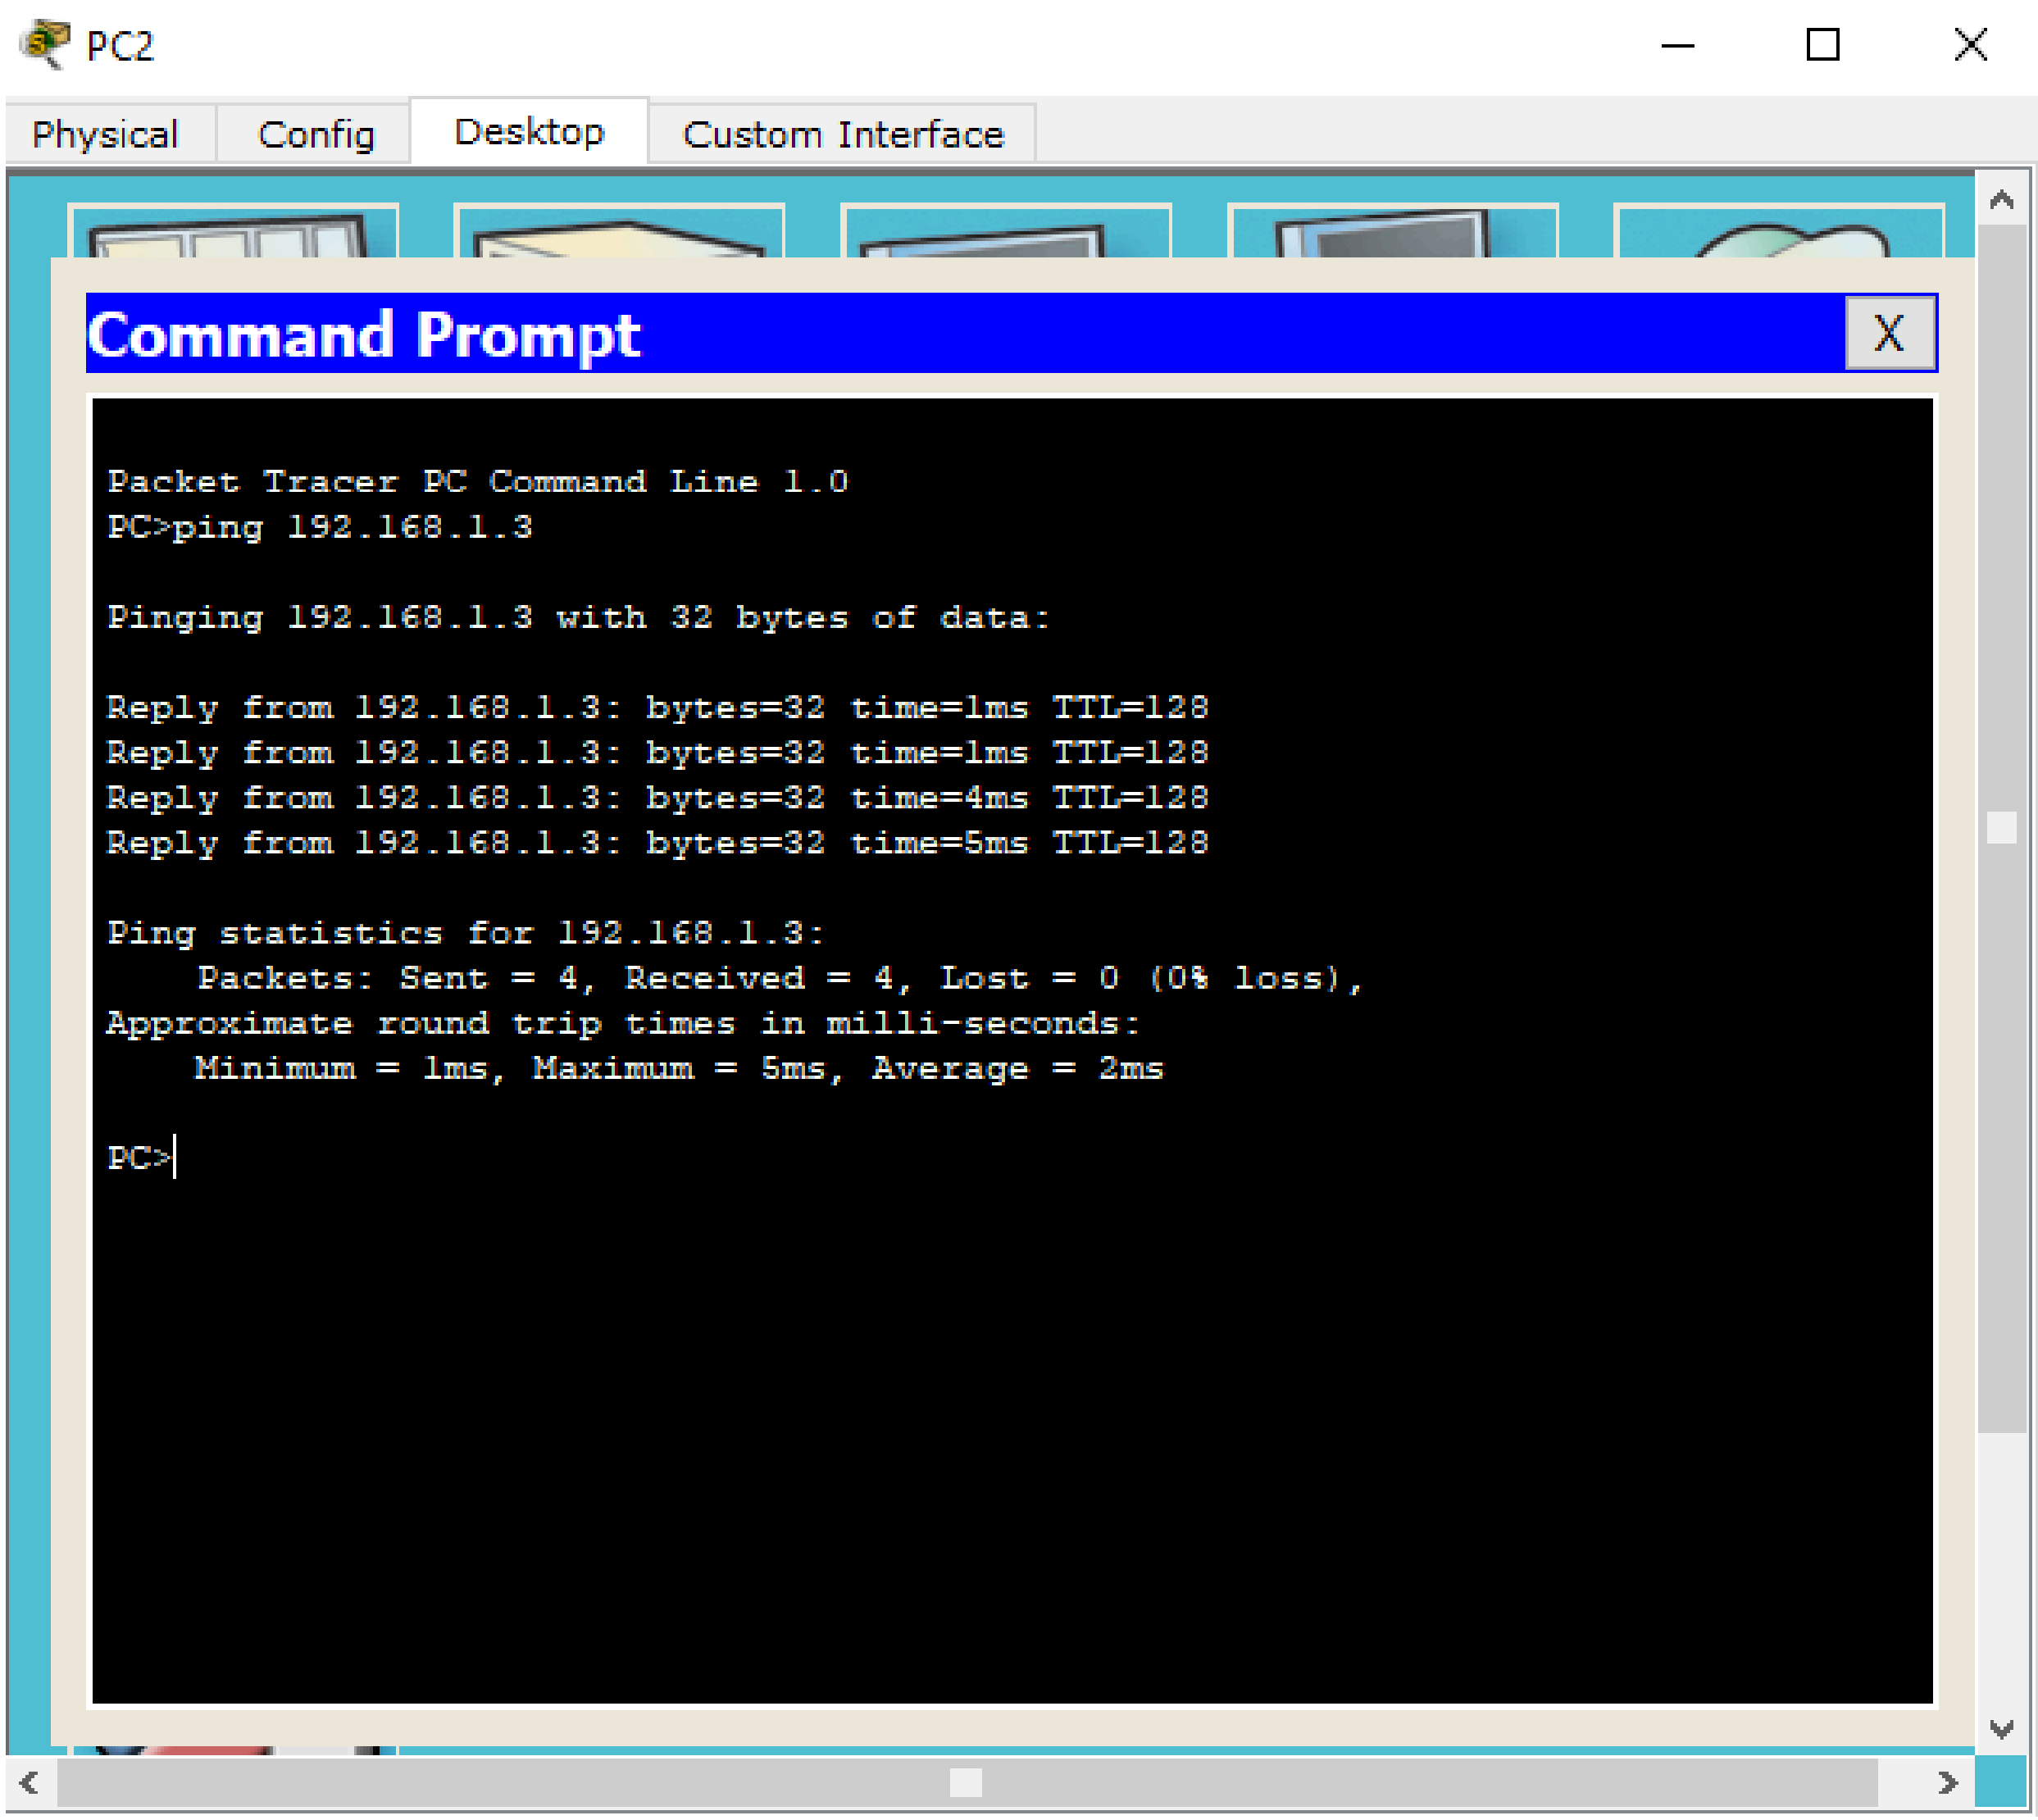
PC2
Physical
Config
Desktop
Custom Interface
Command Prompt
X
Packet Tracer PC Command Line 1.0
PC>ping 192.168.1.3
Pinging 192.168.1.3 with 32 bytes of data:
Reply from 192.168.1.3: bytes=32 time=1ms TTL=128
Reply from 192.168.1.3: bytes=32 time=1ms TTL=128
Reply from 192.168.1.3: bytes=32 time=4ms TTL=128
Reply from 192.168.1.3: bytes=32 time=5ms TTL=128
Ping statistics for 192.168.1.3:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 1ms, Maximum = 5ms, Average = 2ms
PC>

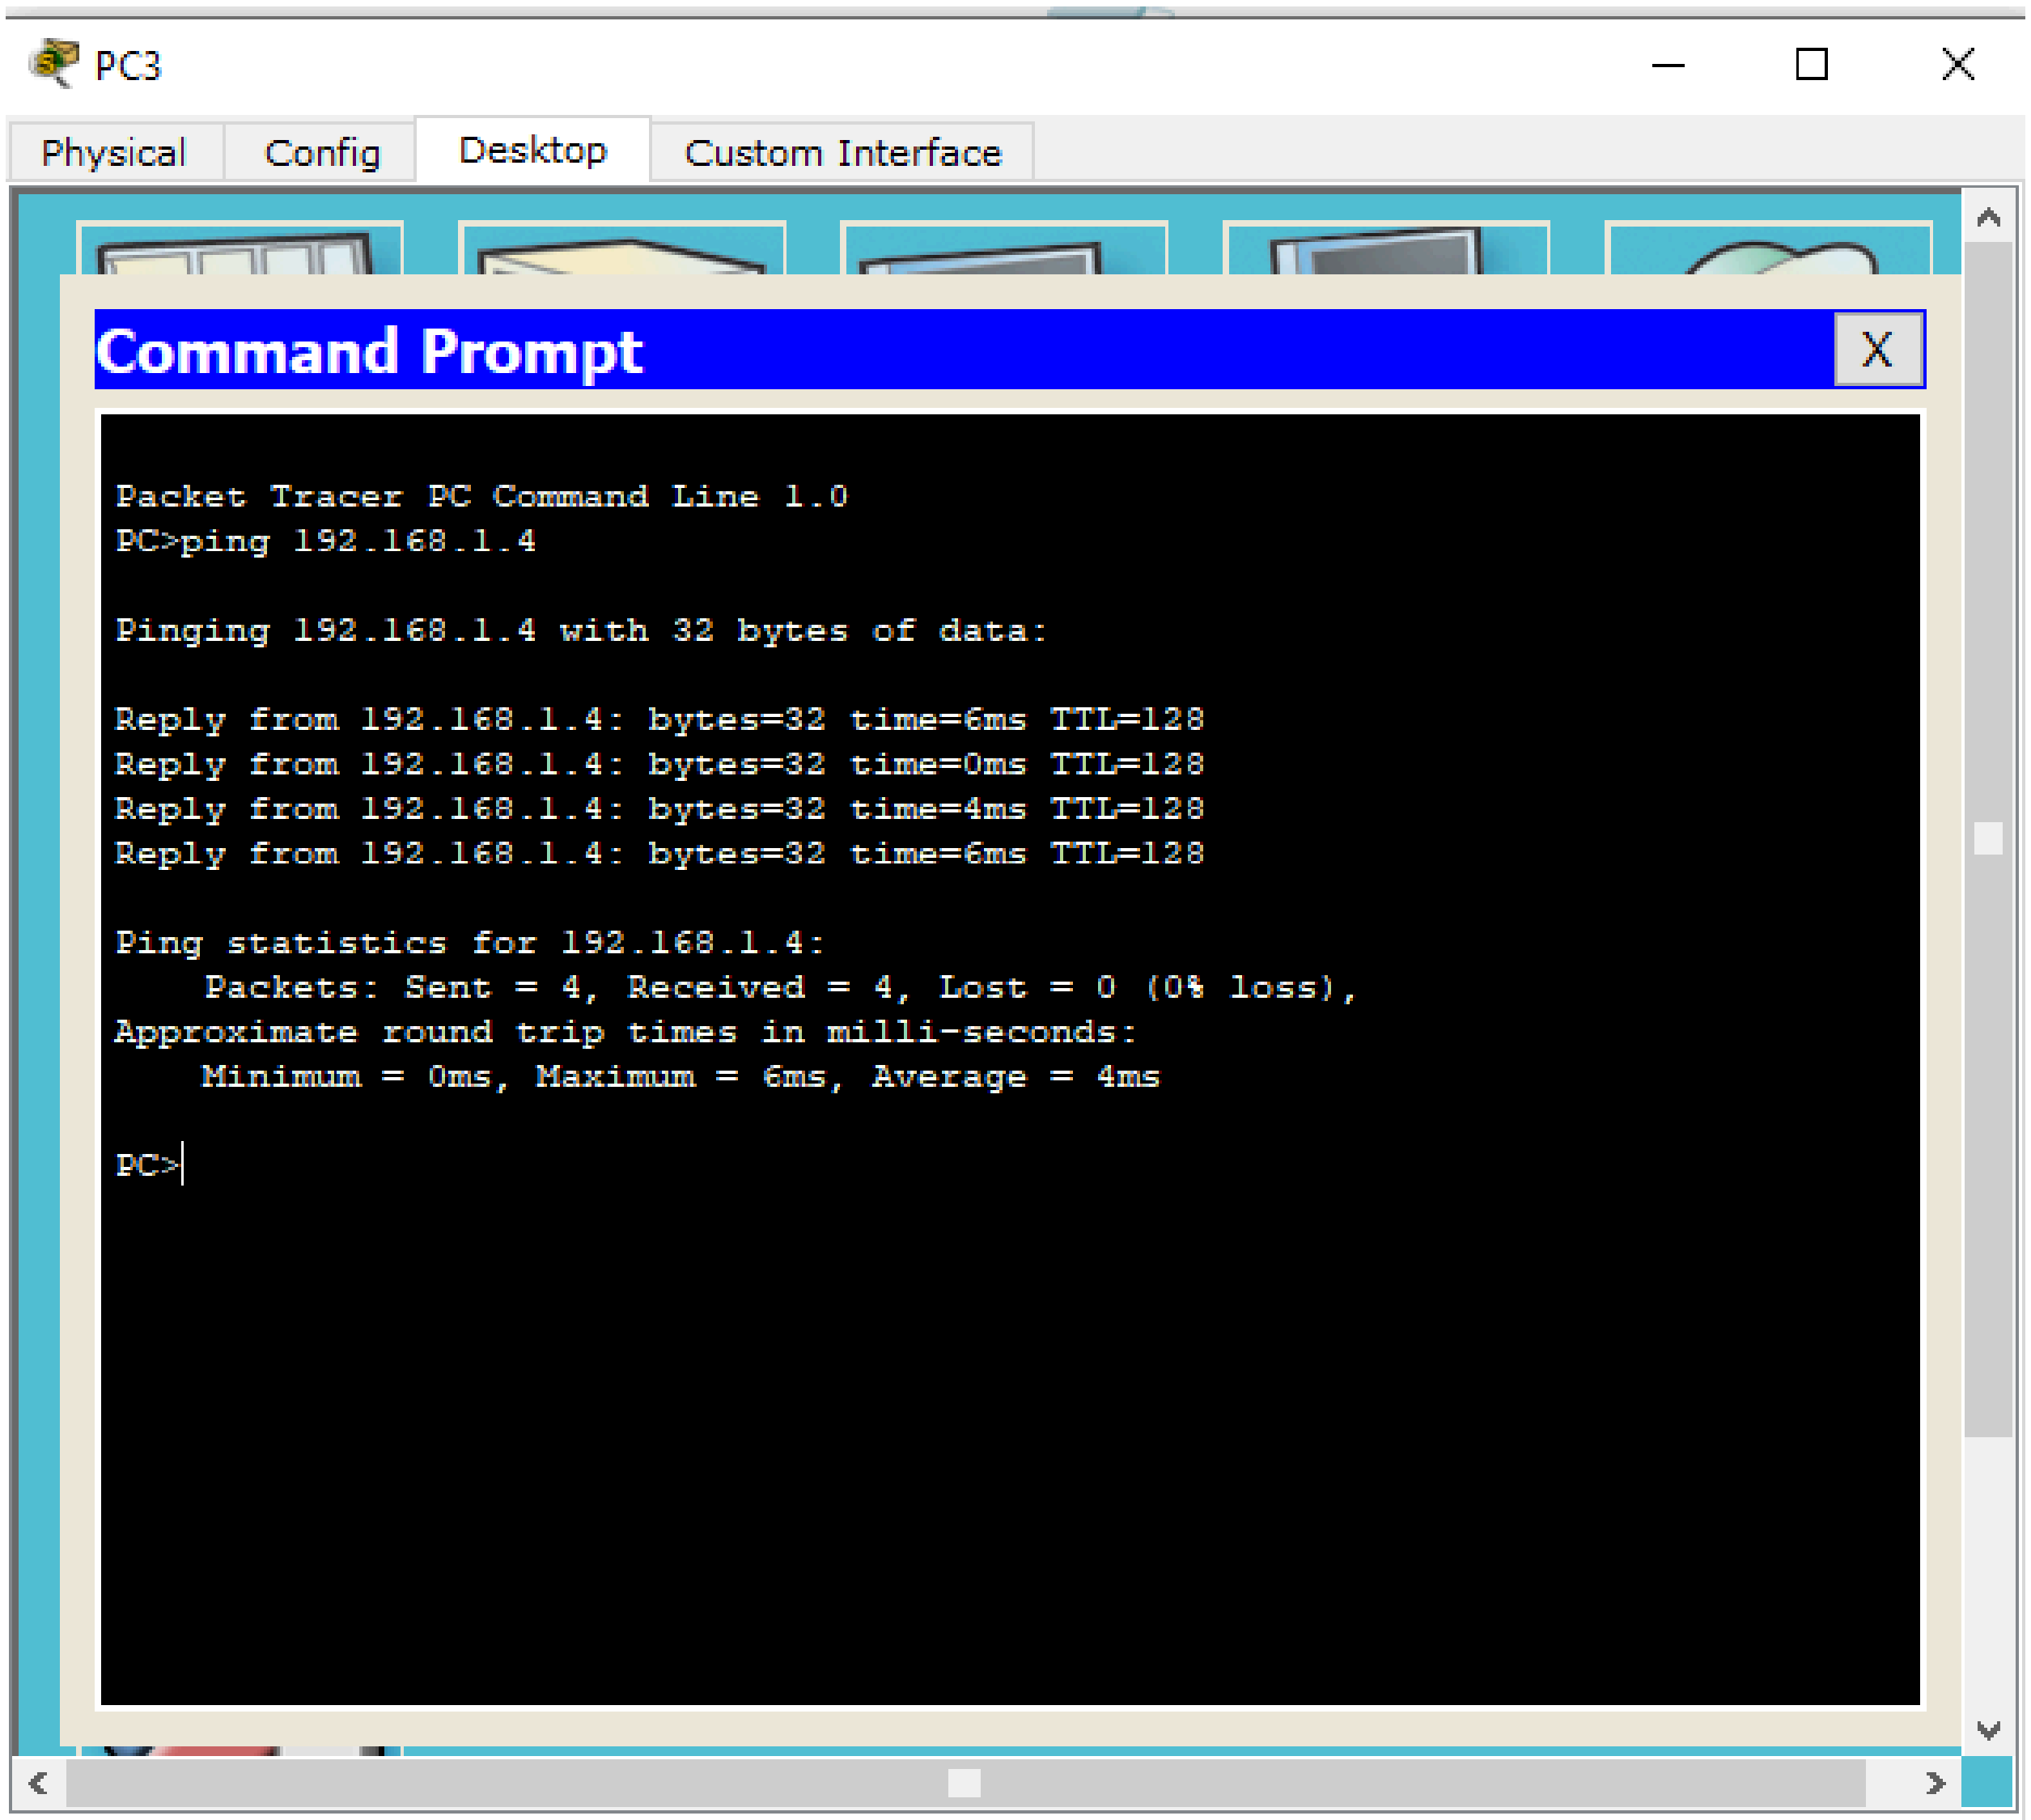
PC3
Physical
Config
Desktop
Custom Interface
Command Prompt
X
Packet Tracer PC Command Line 1.0
PC>ping 192.168.1.4
Pinging 192.168.1.4 with 32 bytes of data:
Reply from 192.168.1.4: bytes=32 time=6ms TTL=128
Reply from 192.168.1.4: bytes=32 time=0ms TTL=128
Reply from 192.168.1.4: bytes=32 time=4ms TTL=128
Reply from 192.168.1.4: bytes=32 time=6ms TTL=128
Ping statistics for 192.168.1.4:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 6ms, Average = 4ms
PC>

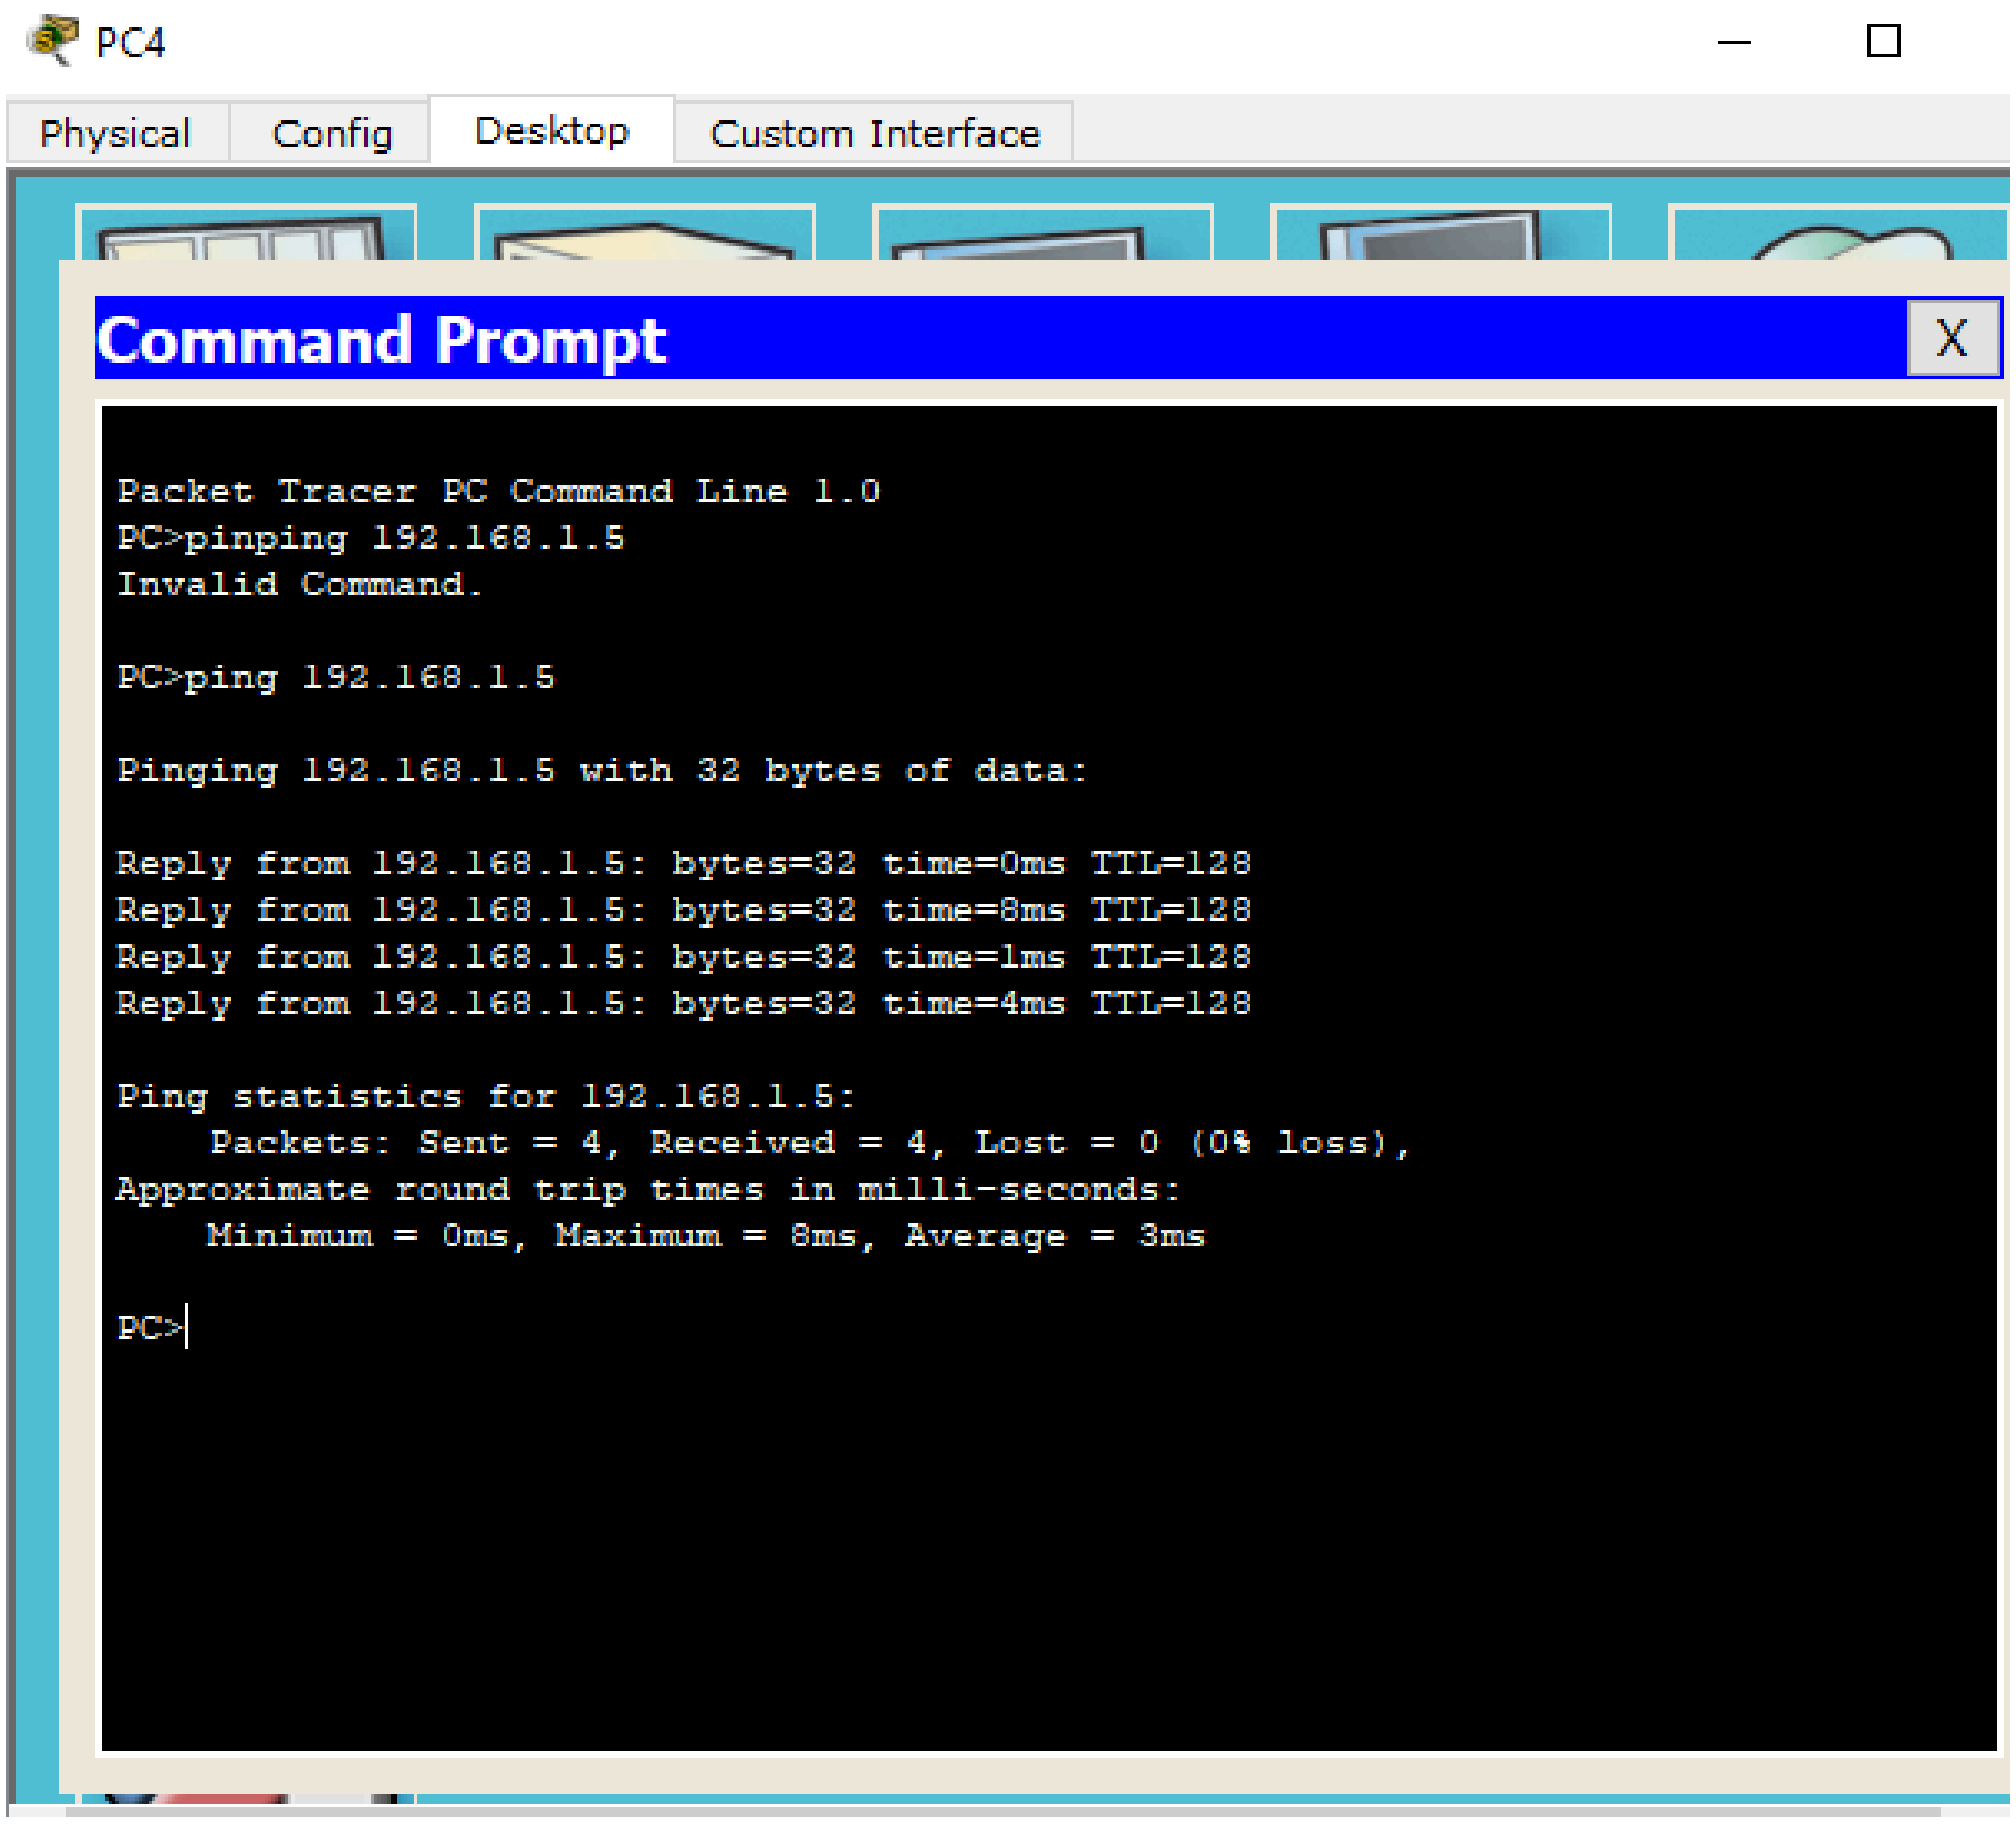

Pinging printer from pc 3:

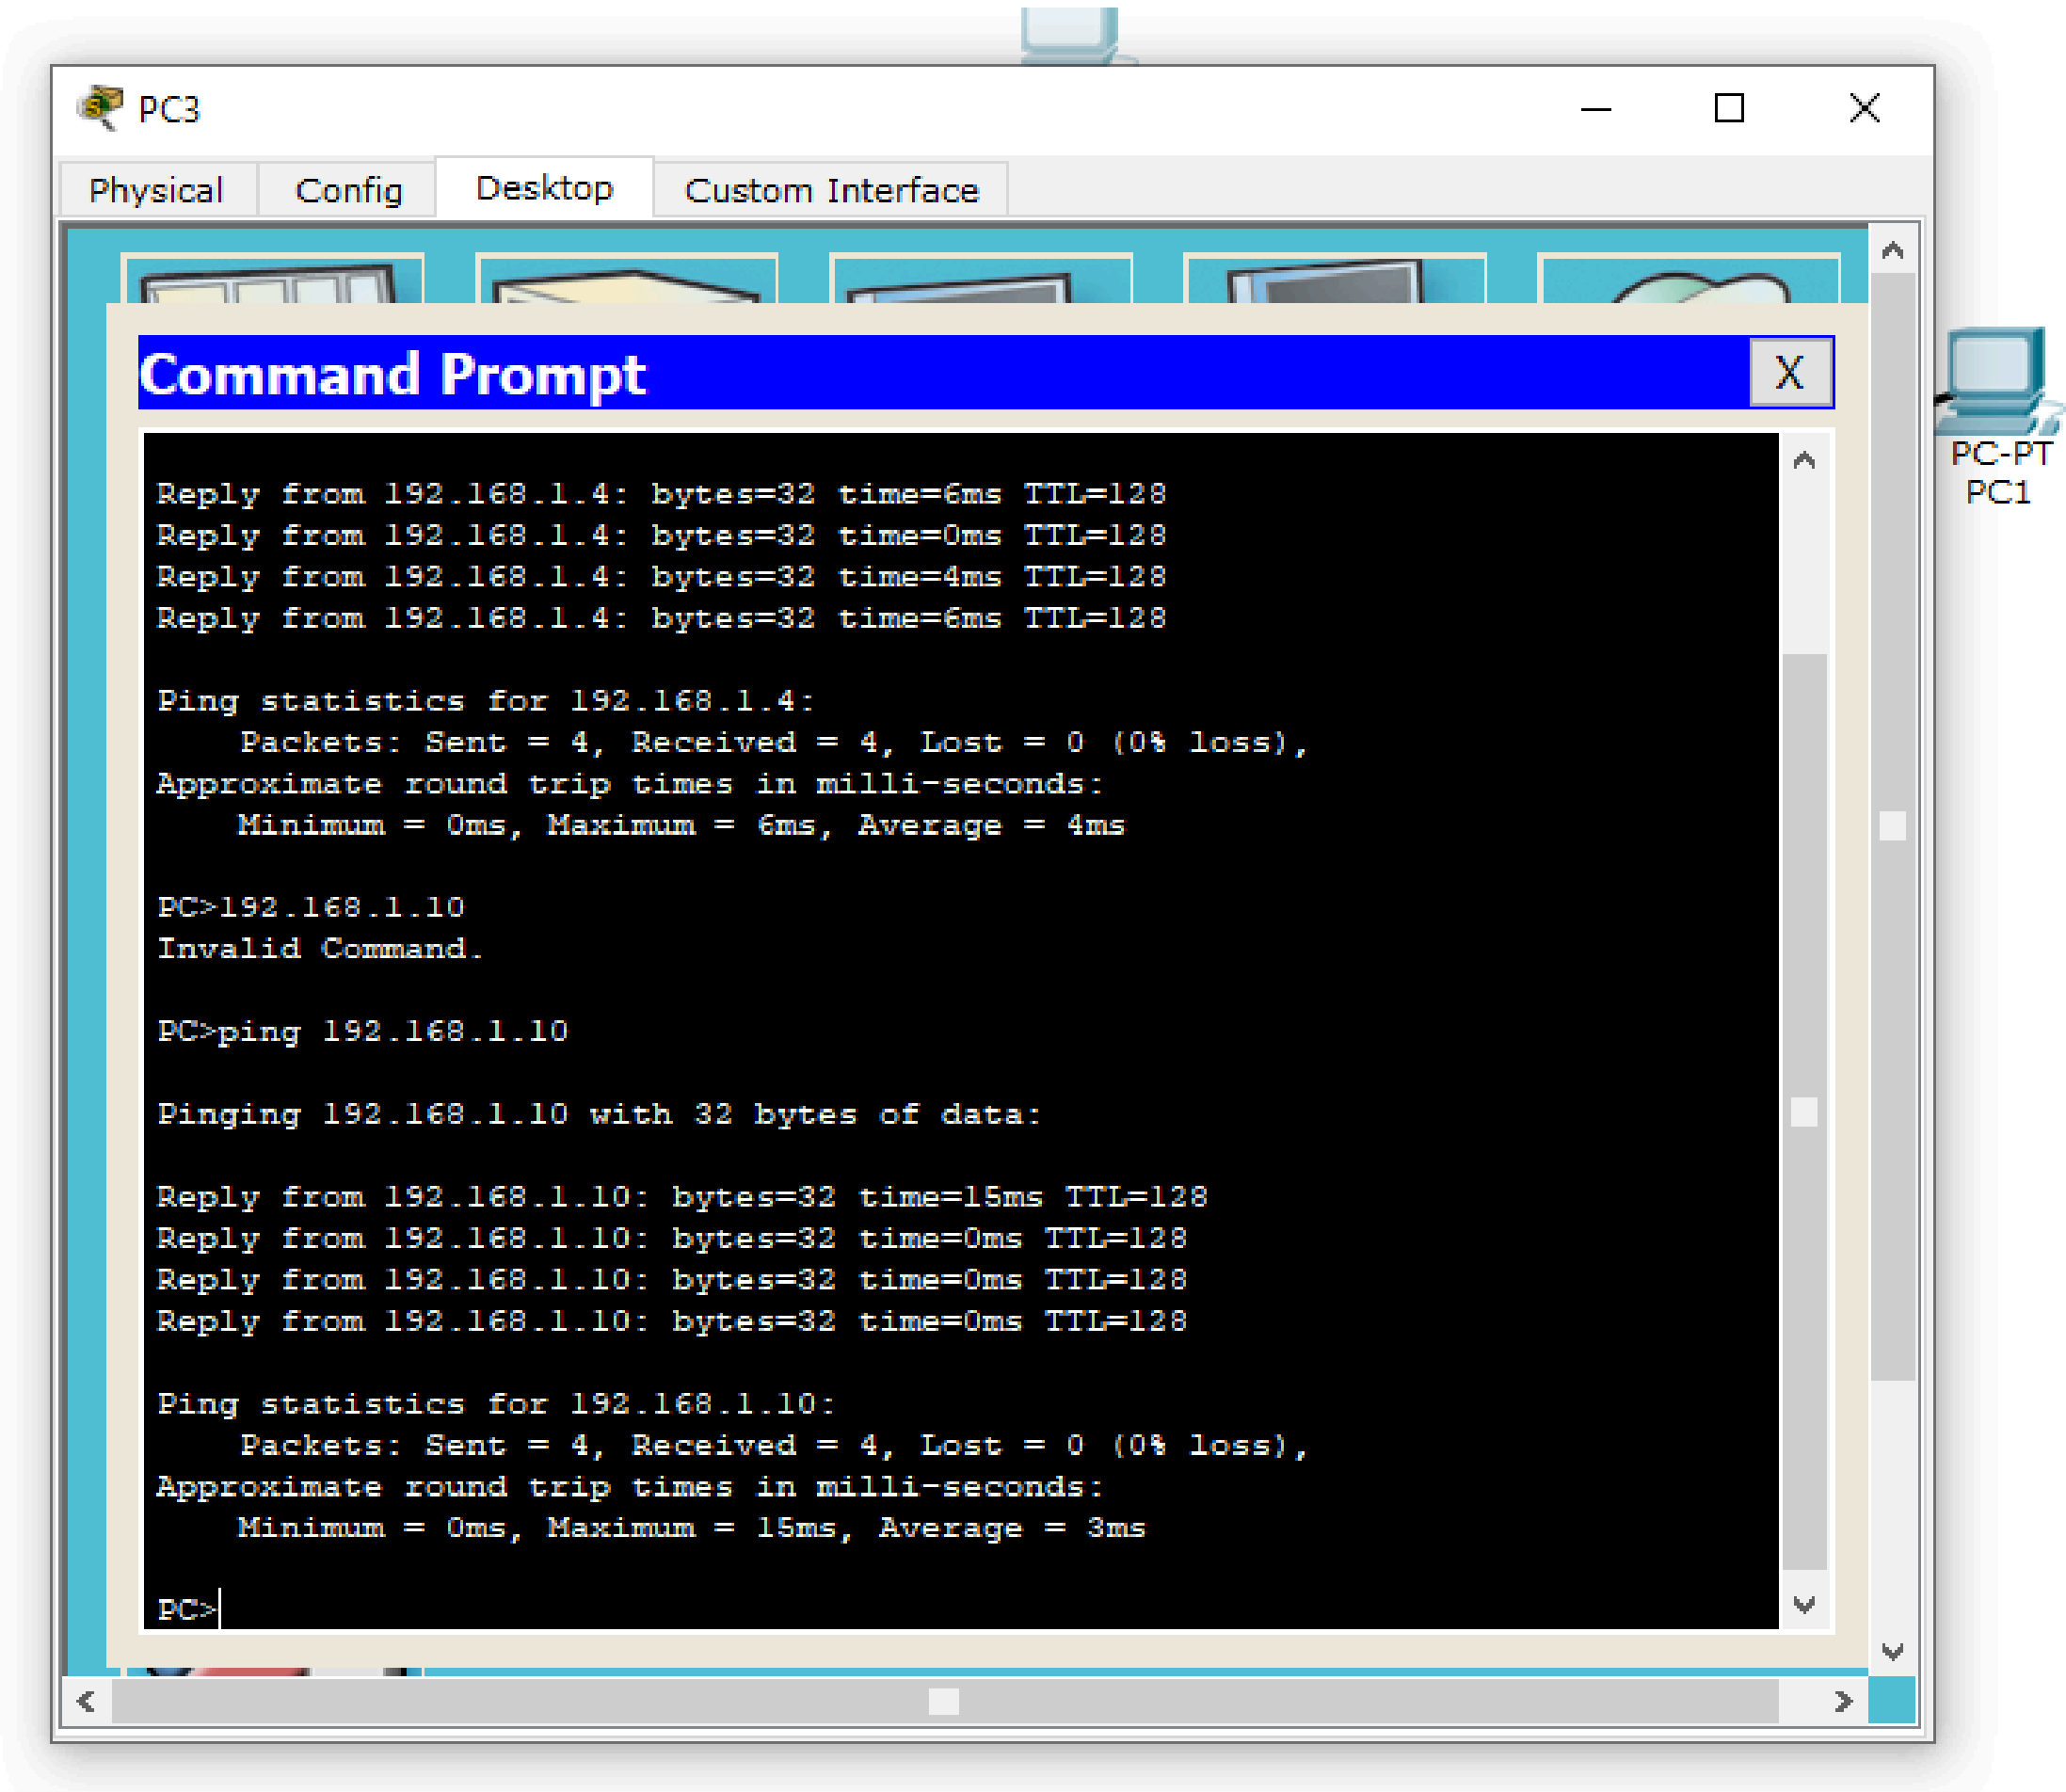
PC3
Physical
Config
Desktop
Custom Interface
Command Prompt
X
Reply from 192.168.1.4: bytes=32 time=6ms TTL=128
Reply from 192.168.1.4: bytes=32 time=0ms TTL=128
Reply from 192.168.1.4: bytes=32 time=4ms TTL=128
Reply from 192.168.1.4: bytes=32 time=6ms TTL=128
Ping statistics for 192.168.1.4:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 6ms, Average = 4ms
PC>192.168.1.10
Invalid Command.
PC>ping 192.168.1.10
Pinging 192.168.1.10 with 32 bytes of data:
Reply from 192.168.1.10: bytes=32 time=15ms TTL=128
Reply from 192.168.1.10: bytes=32 time=0ms TTL=128
Reply from 192.168.1.10: bytes=32 time=0ms TTL=128
Reply from 192.168.1.10: bytes=32 time=0ms TTL=128
Ping statistics for 192.168.1.10:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 15ms, Average = 3ms
PC>
PC-PT
PC1

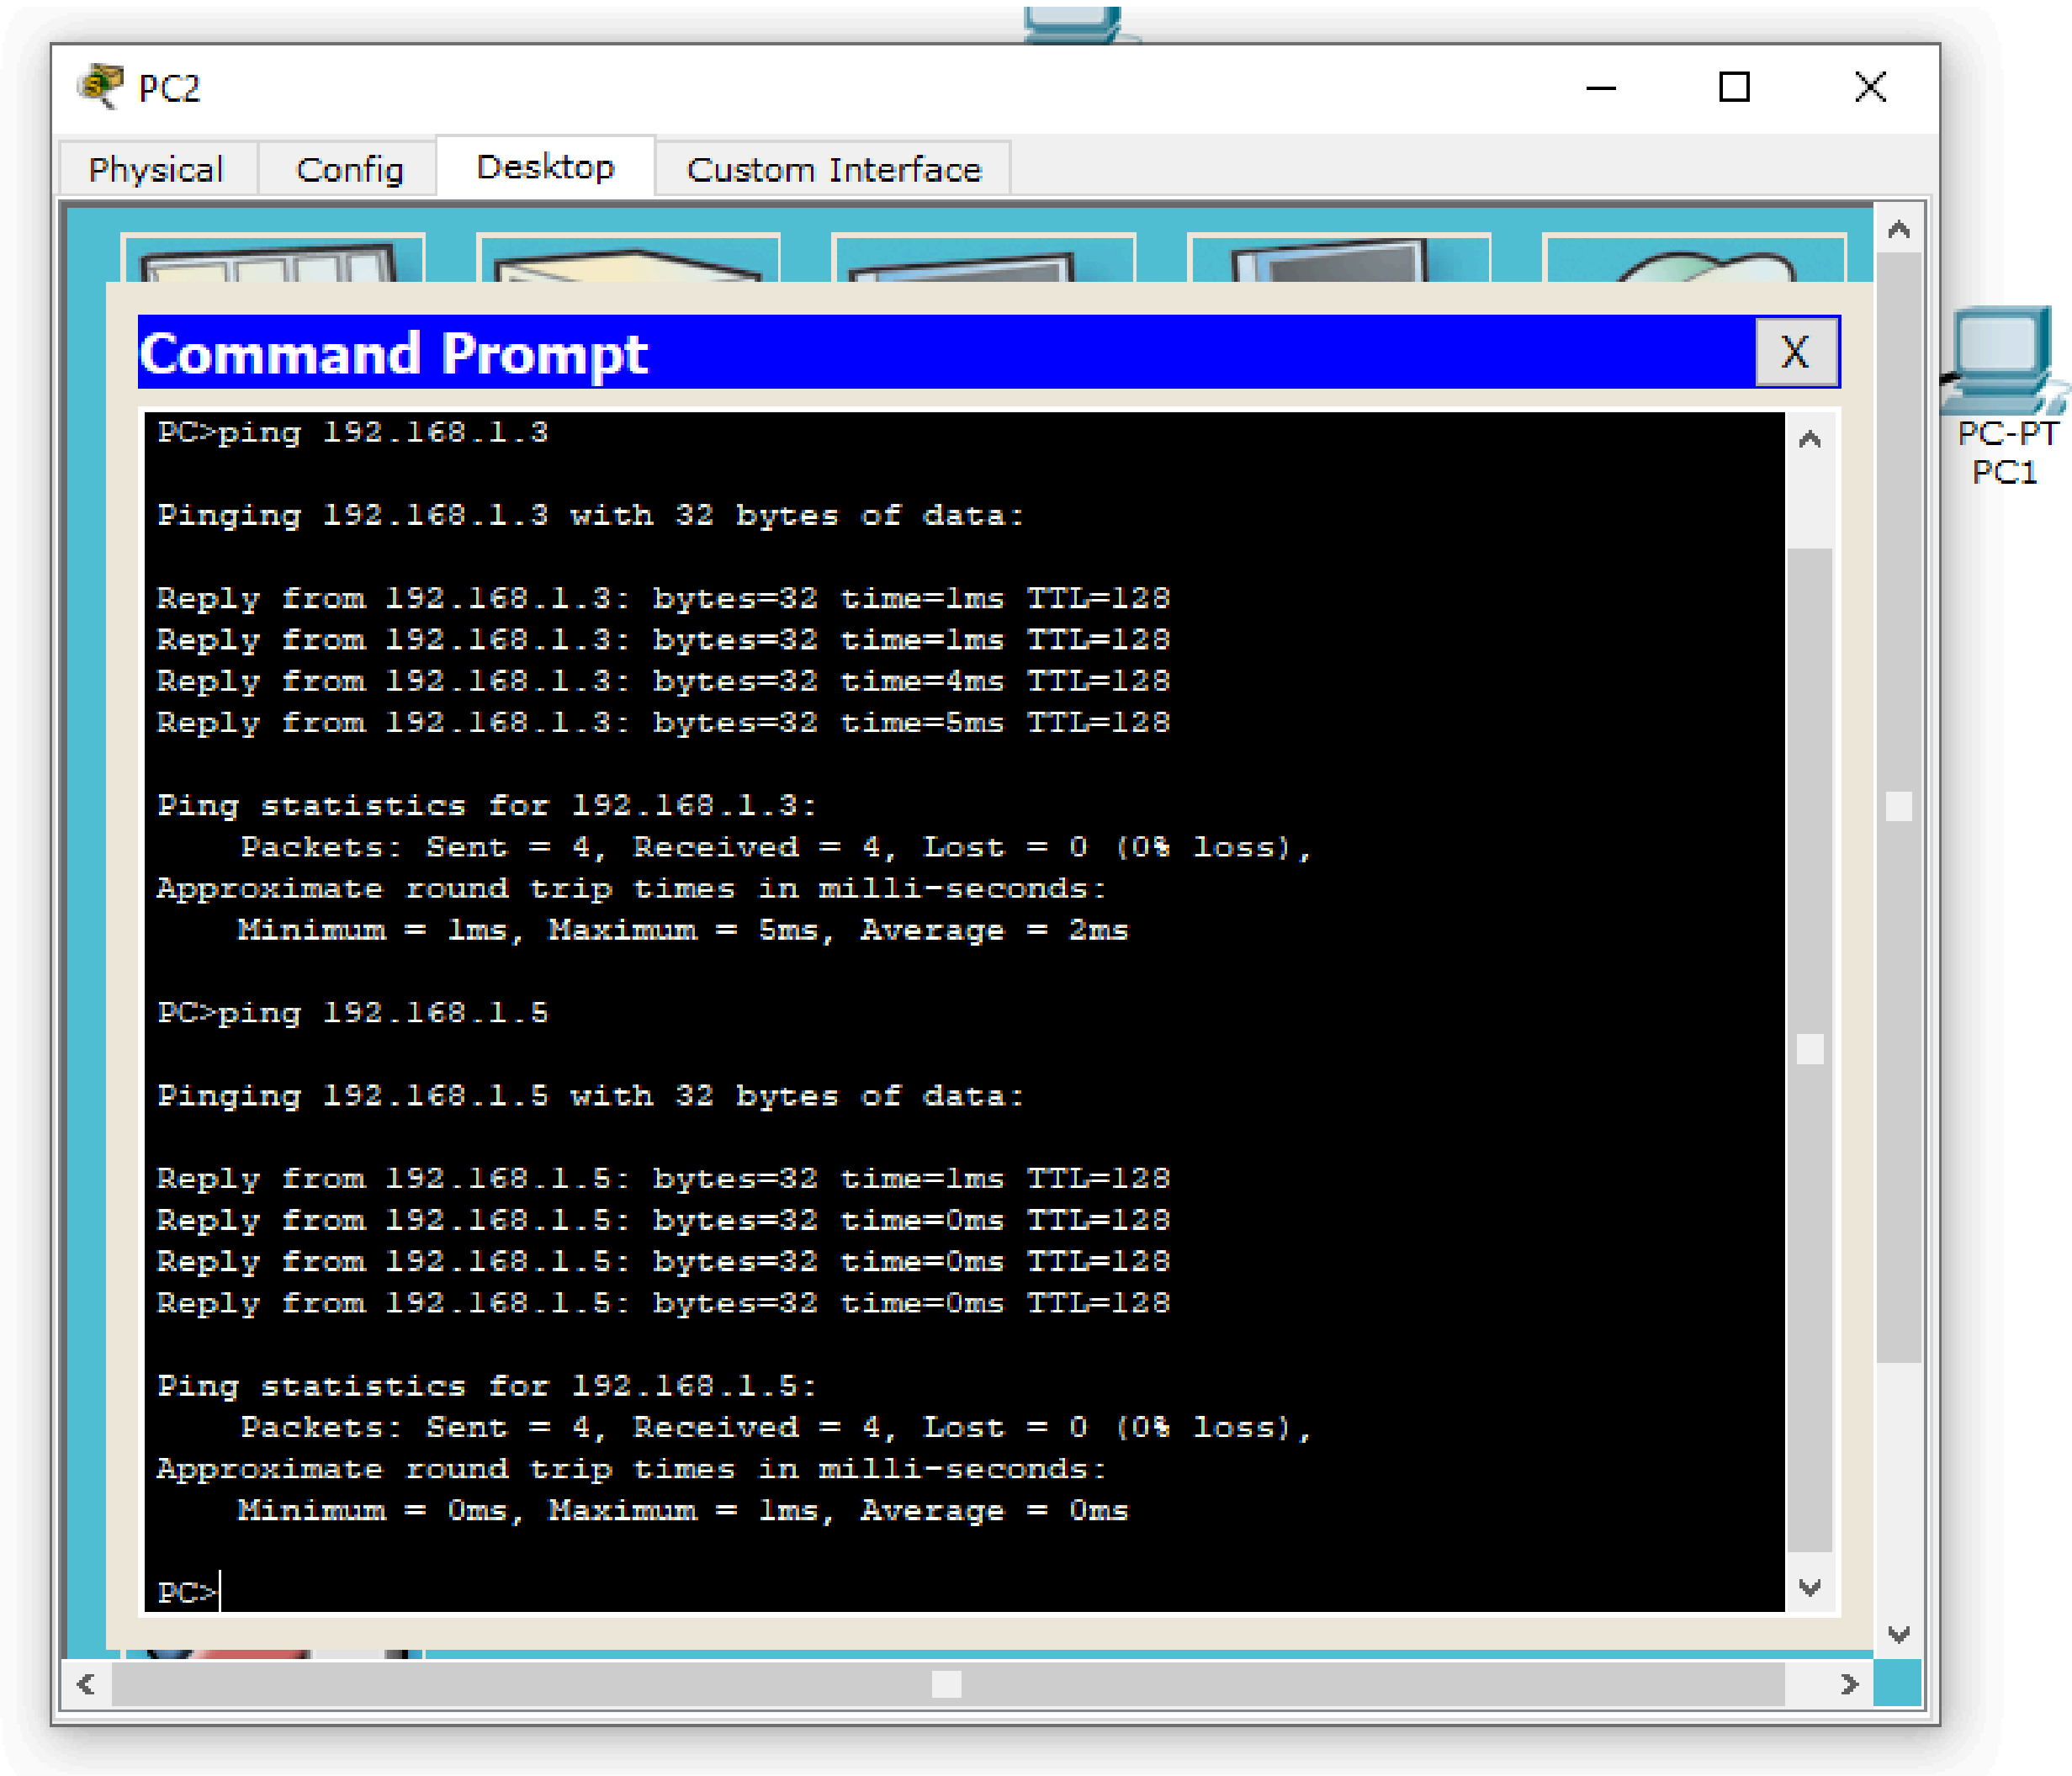

EXPLANATION:

In this steps we have configured every laptop and printer by assigning the mac address to them that uniquely identify the device on the internet. I have used ping commands to acknowleadge that they have received messages or not.

3). Extra pictures:

In this step I have used ping command in command prompt to confirm that the printer and the laptops are getting commands to each other like in the example below where a ping command was sent to printer from pc which got a response that demonstrates thst they can track each other.

Pingining pc 1from printer

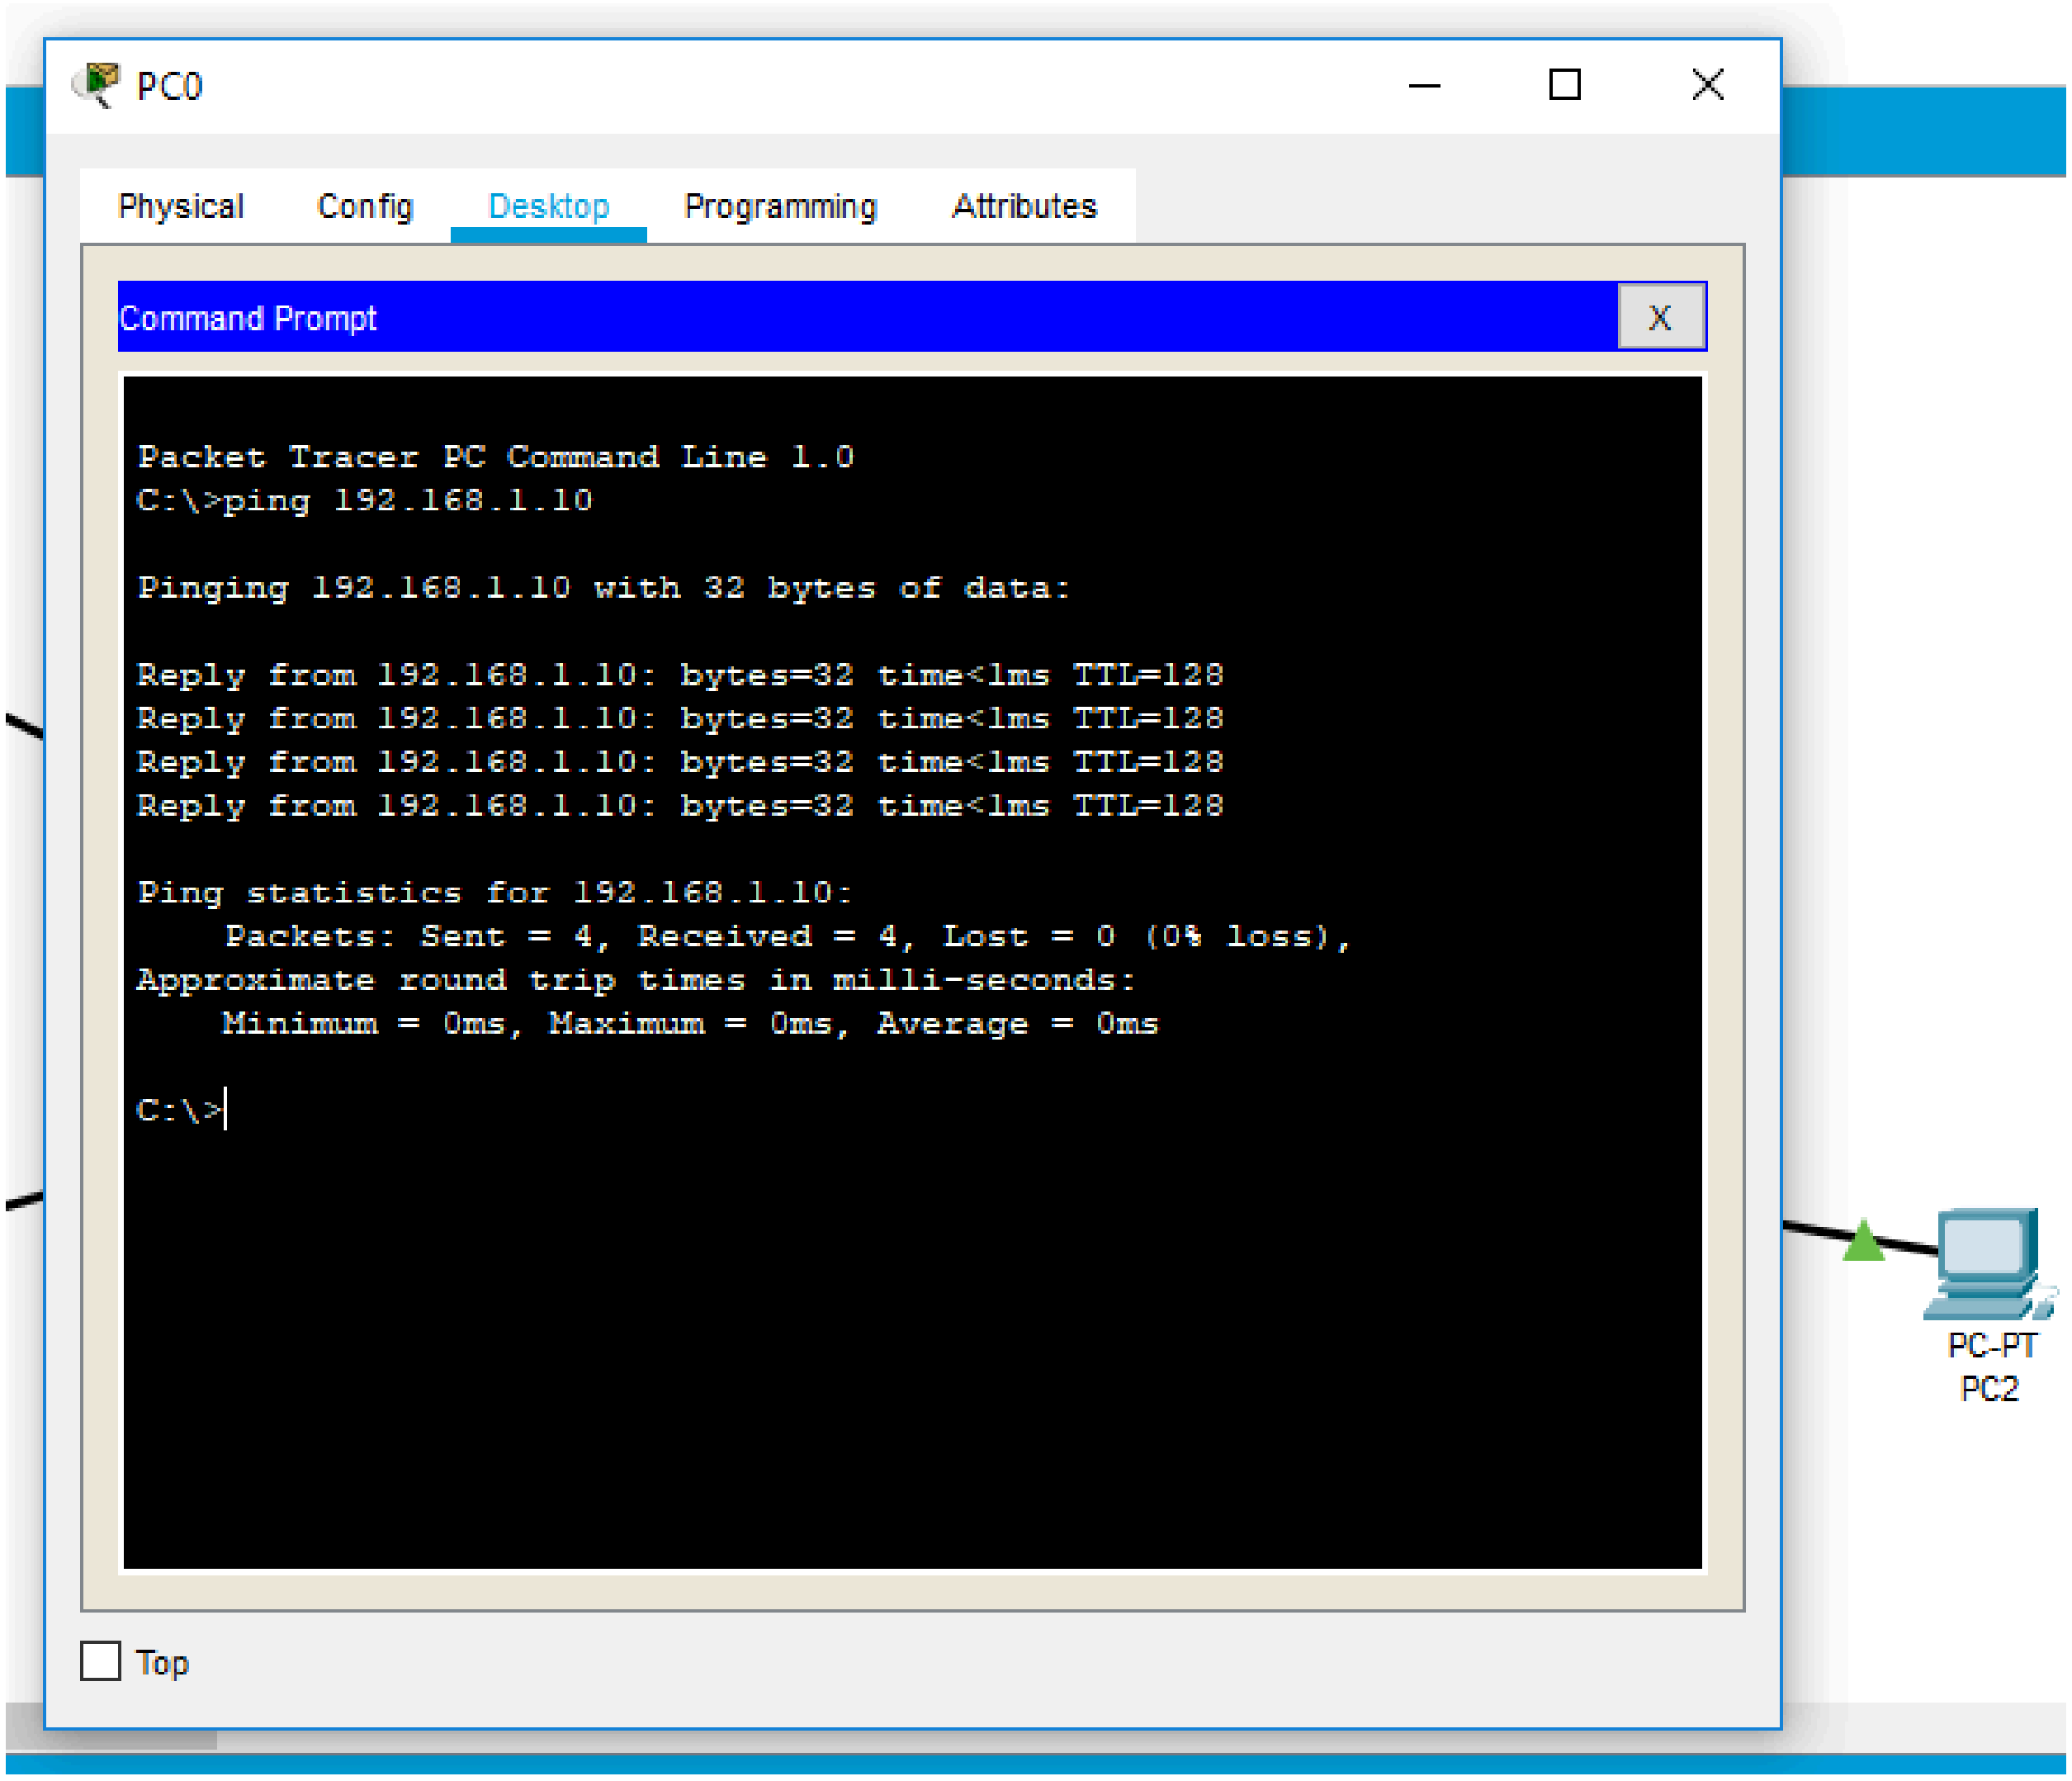

Pingining pc 2from printer

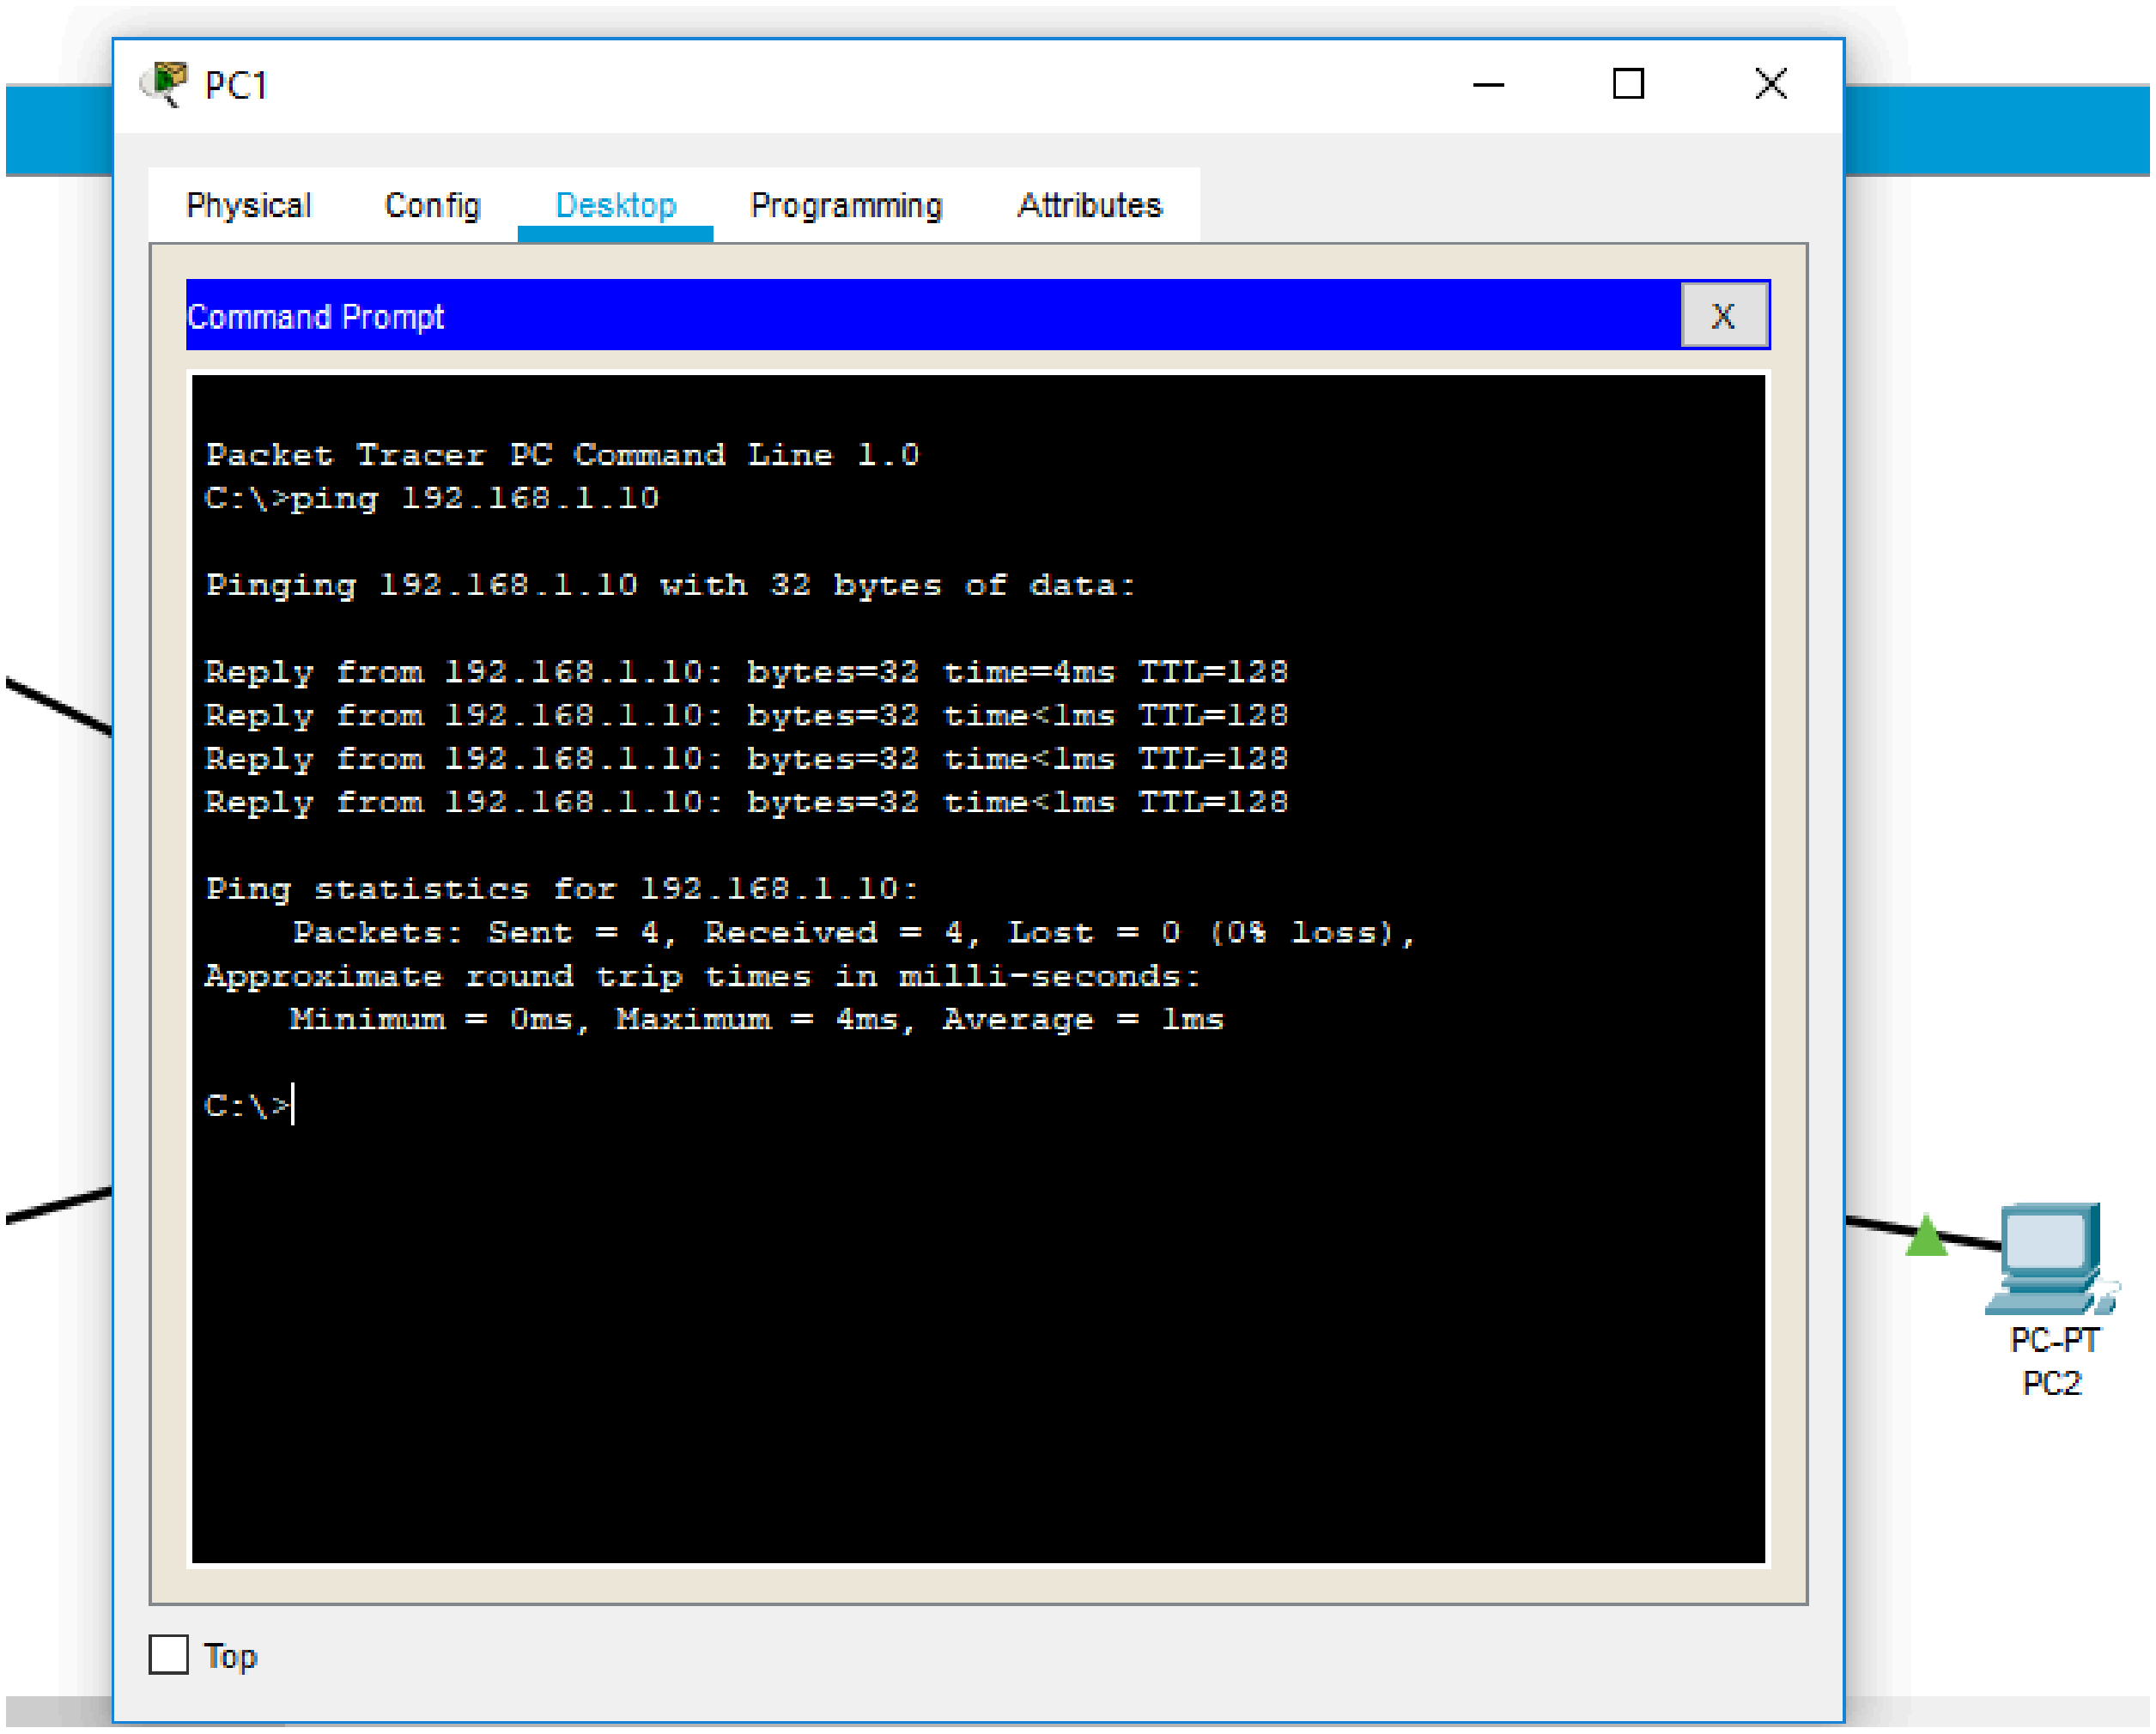

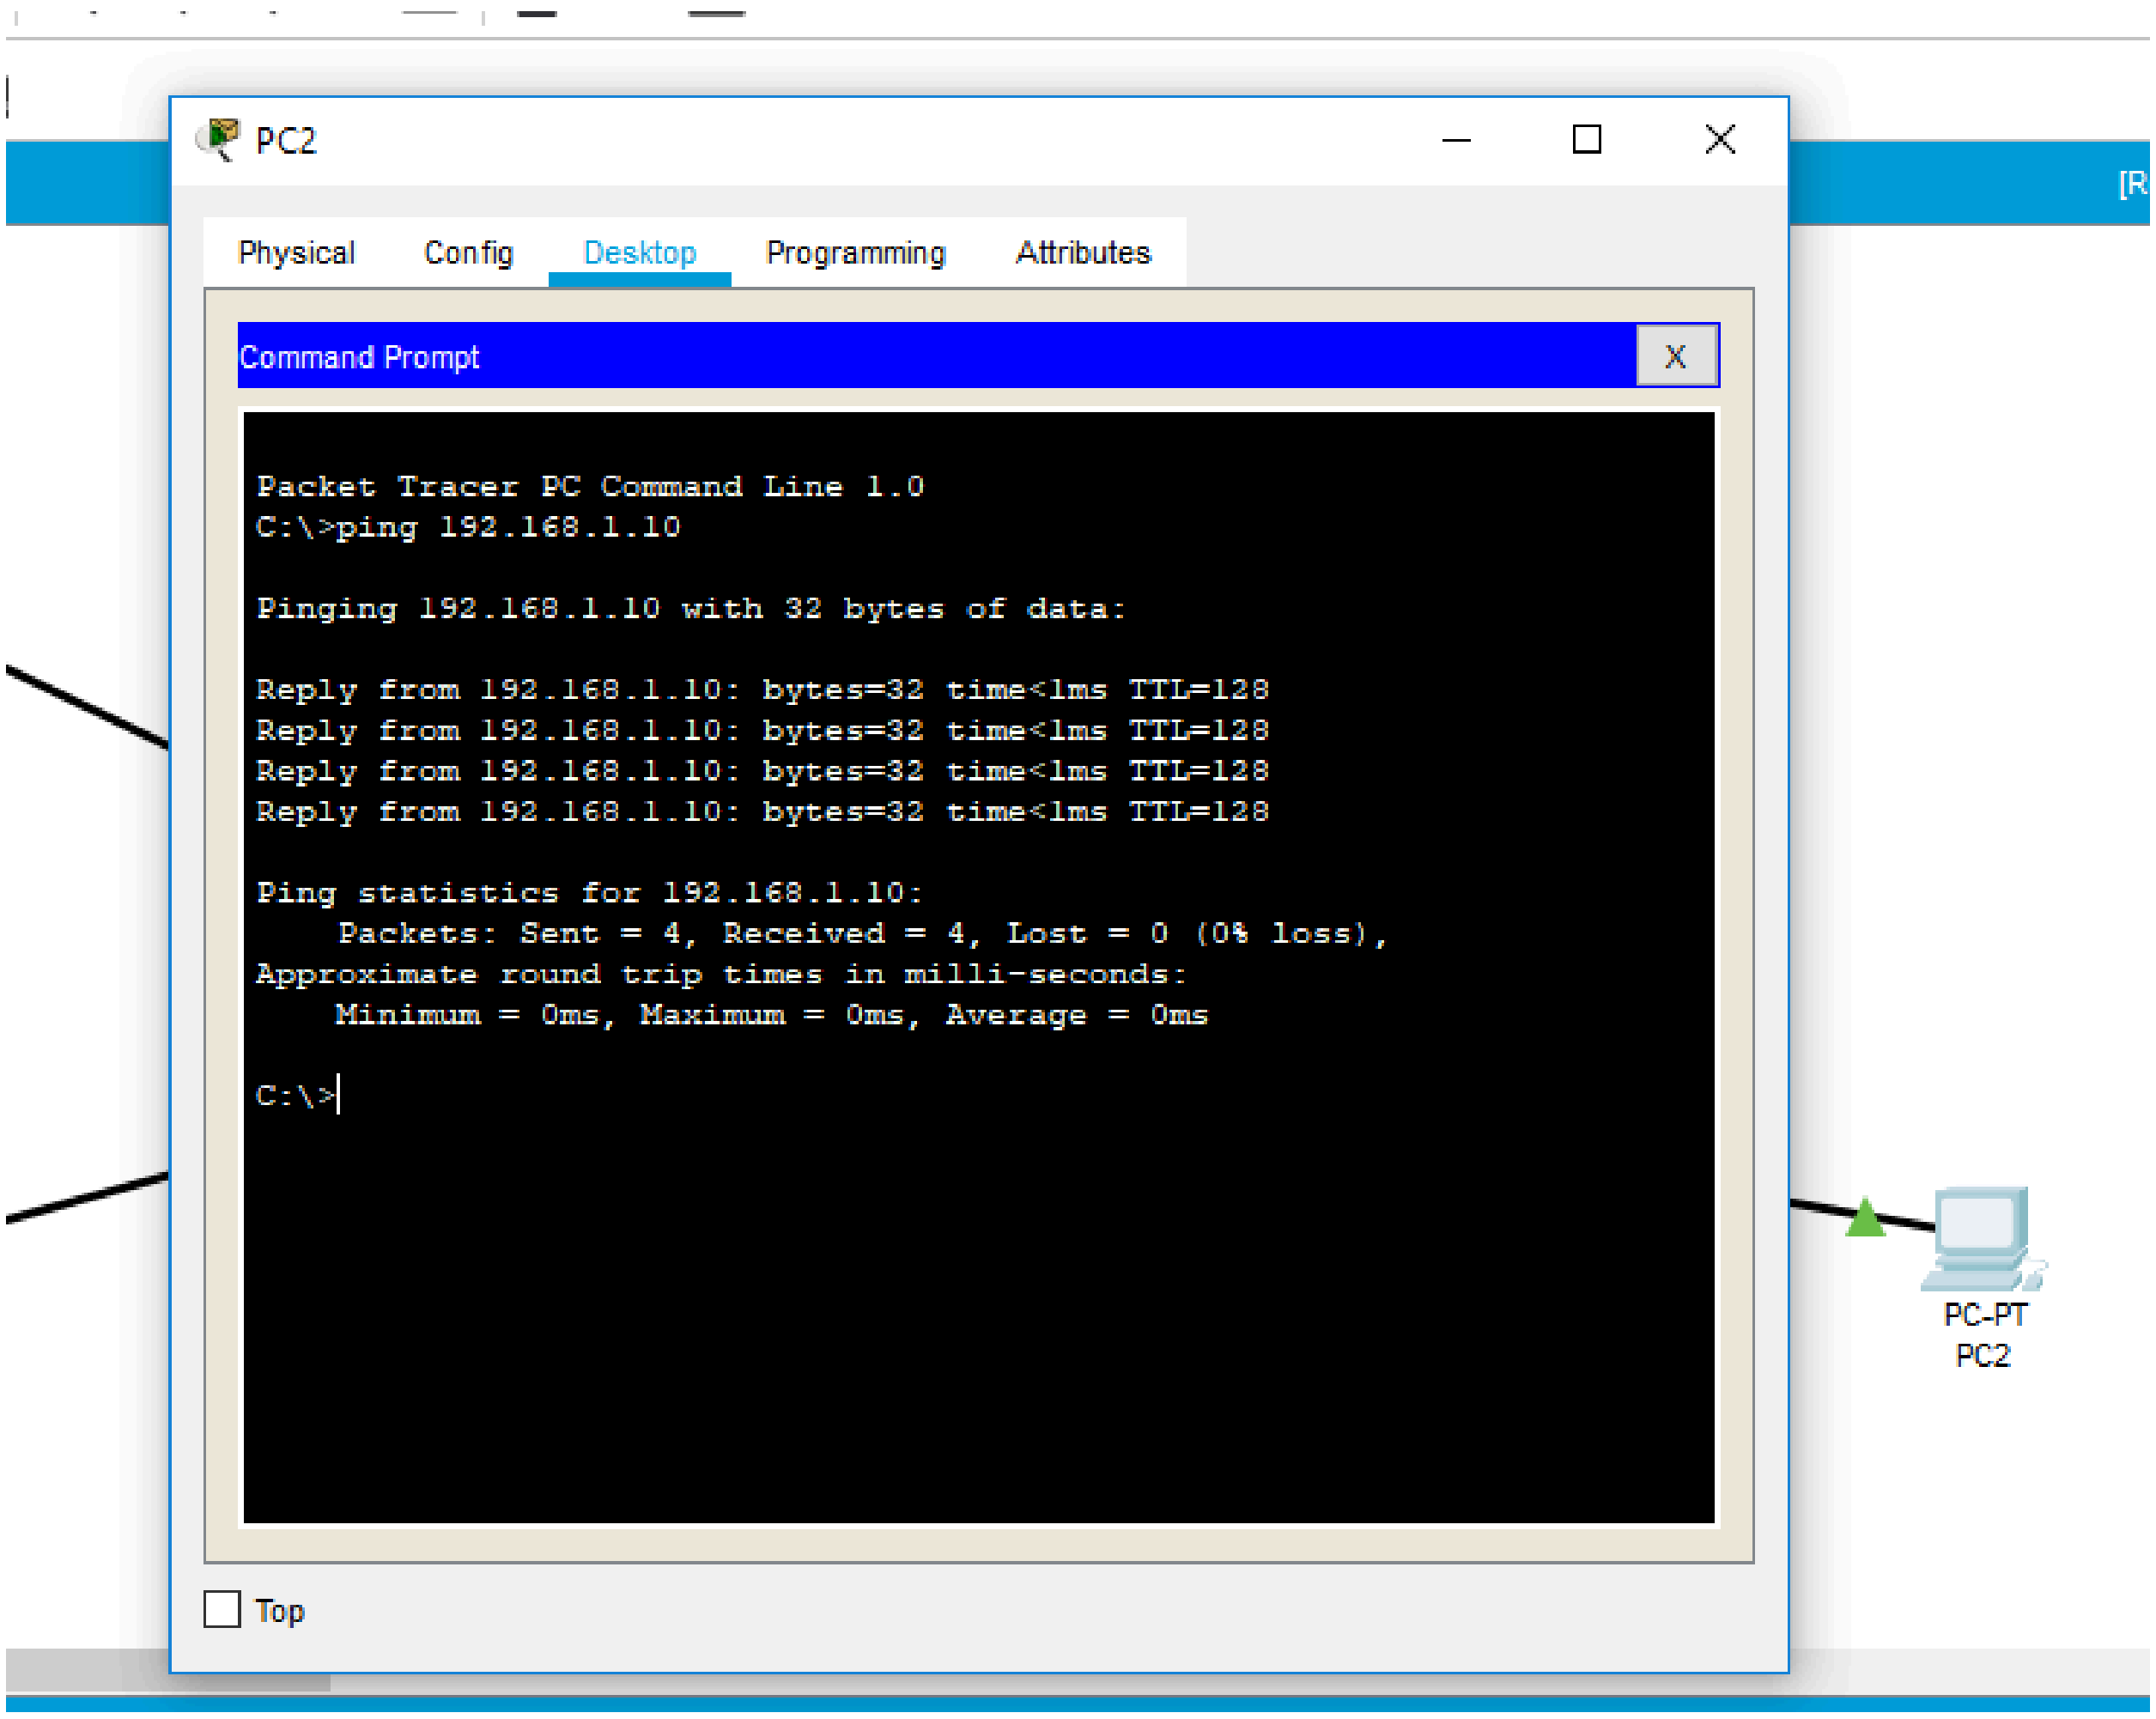
PC2
Physical
Config
Desktop
Programming
Attributes
Command Prompt
X
Packet Tracer PC Command Line 1.0
C:\>ping 192.168.1.10
Pinging 192.168.1.10 with 32 bytes of data:
Reply from 192.168.1.10: bytes=32 time<1ms TTL=128
Reply from 192.168.1.10: bytes=32 time<1ms TTL=128
Reply from 192.168.1.10: bytes=32 time<1ms TTL=128
Reply from 192.168.1.10: bytes=32 time<1ms TTL=128
Ping statistics for 192.168.1.10:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 0ms, Average = 0ms
C:\>
Top
PC-PT
PC2

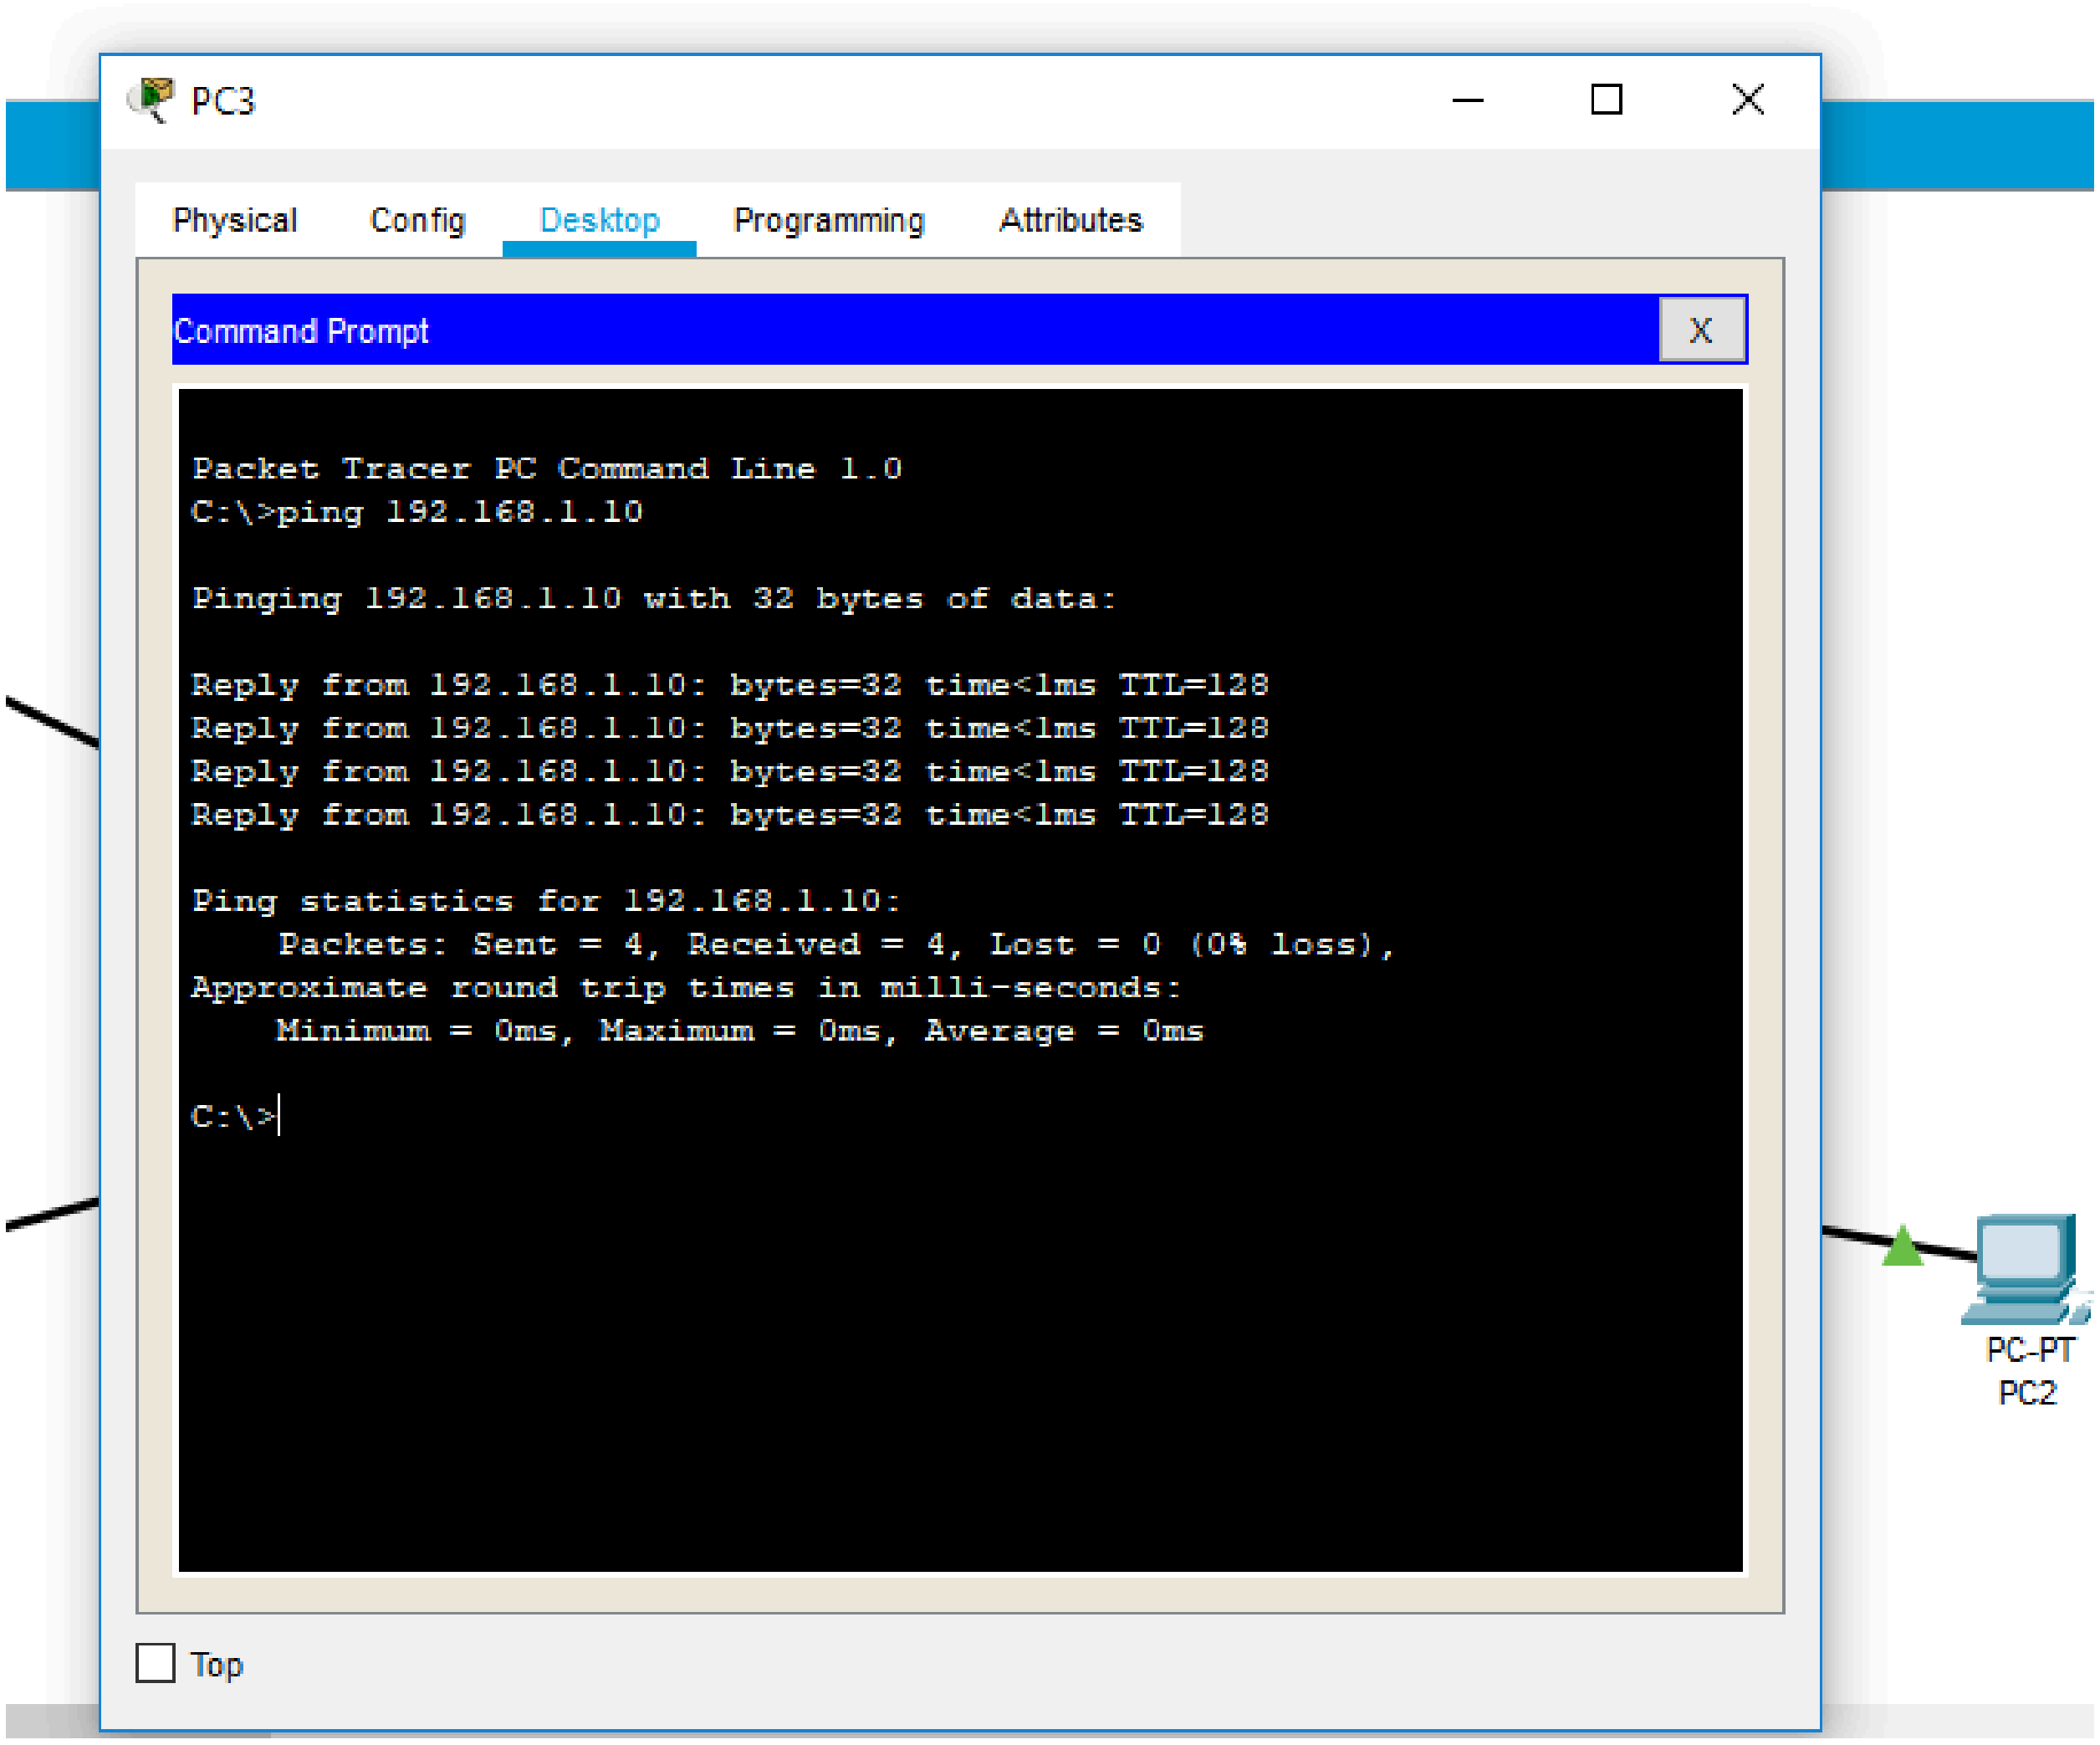
PC3
Physical
Config
Desktop
Programming
Attributes
Command Prompt
X
Packet Tracer PC Command Line 1.0
C:\>ping 192.168.1.10
Pinging 192.168.1.10 with 32 bytes of data:
Reply from 192.168.1.10: bytes=32 time<1ms TTL=128
Reply from 192.168.1.10: bytes=32 time<1ms TTL=128
Reply from 192.168.1.10: bytes=32 time<1ms TTL=128
Reply from 192.168.1.10: bytes=32 time<1ms TTL=128
Ping statistics for 192.168.1.10:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 0ms, Average = 0ms
C:\>
Top
PC-PT
PC2

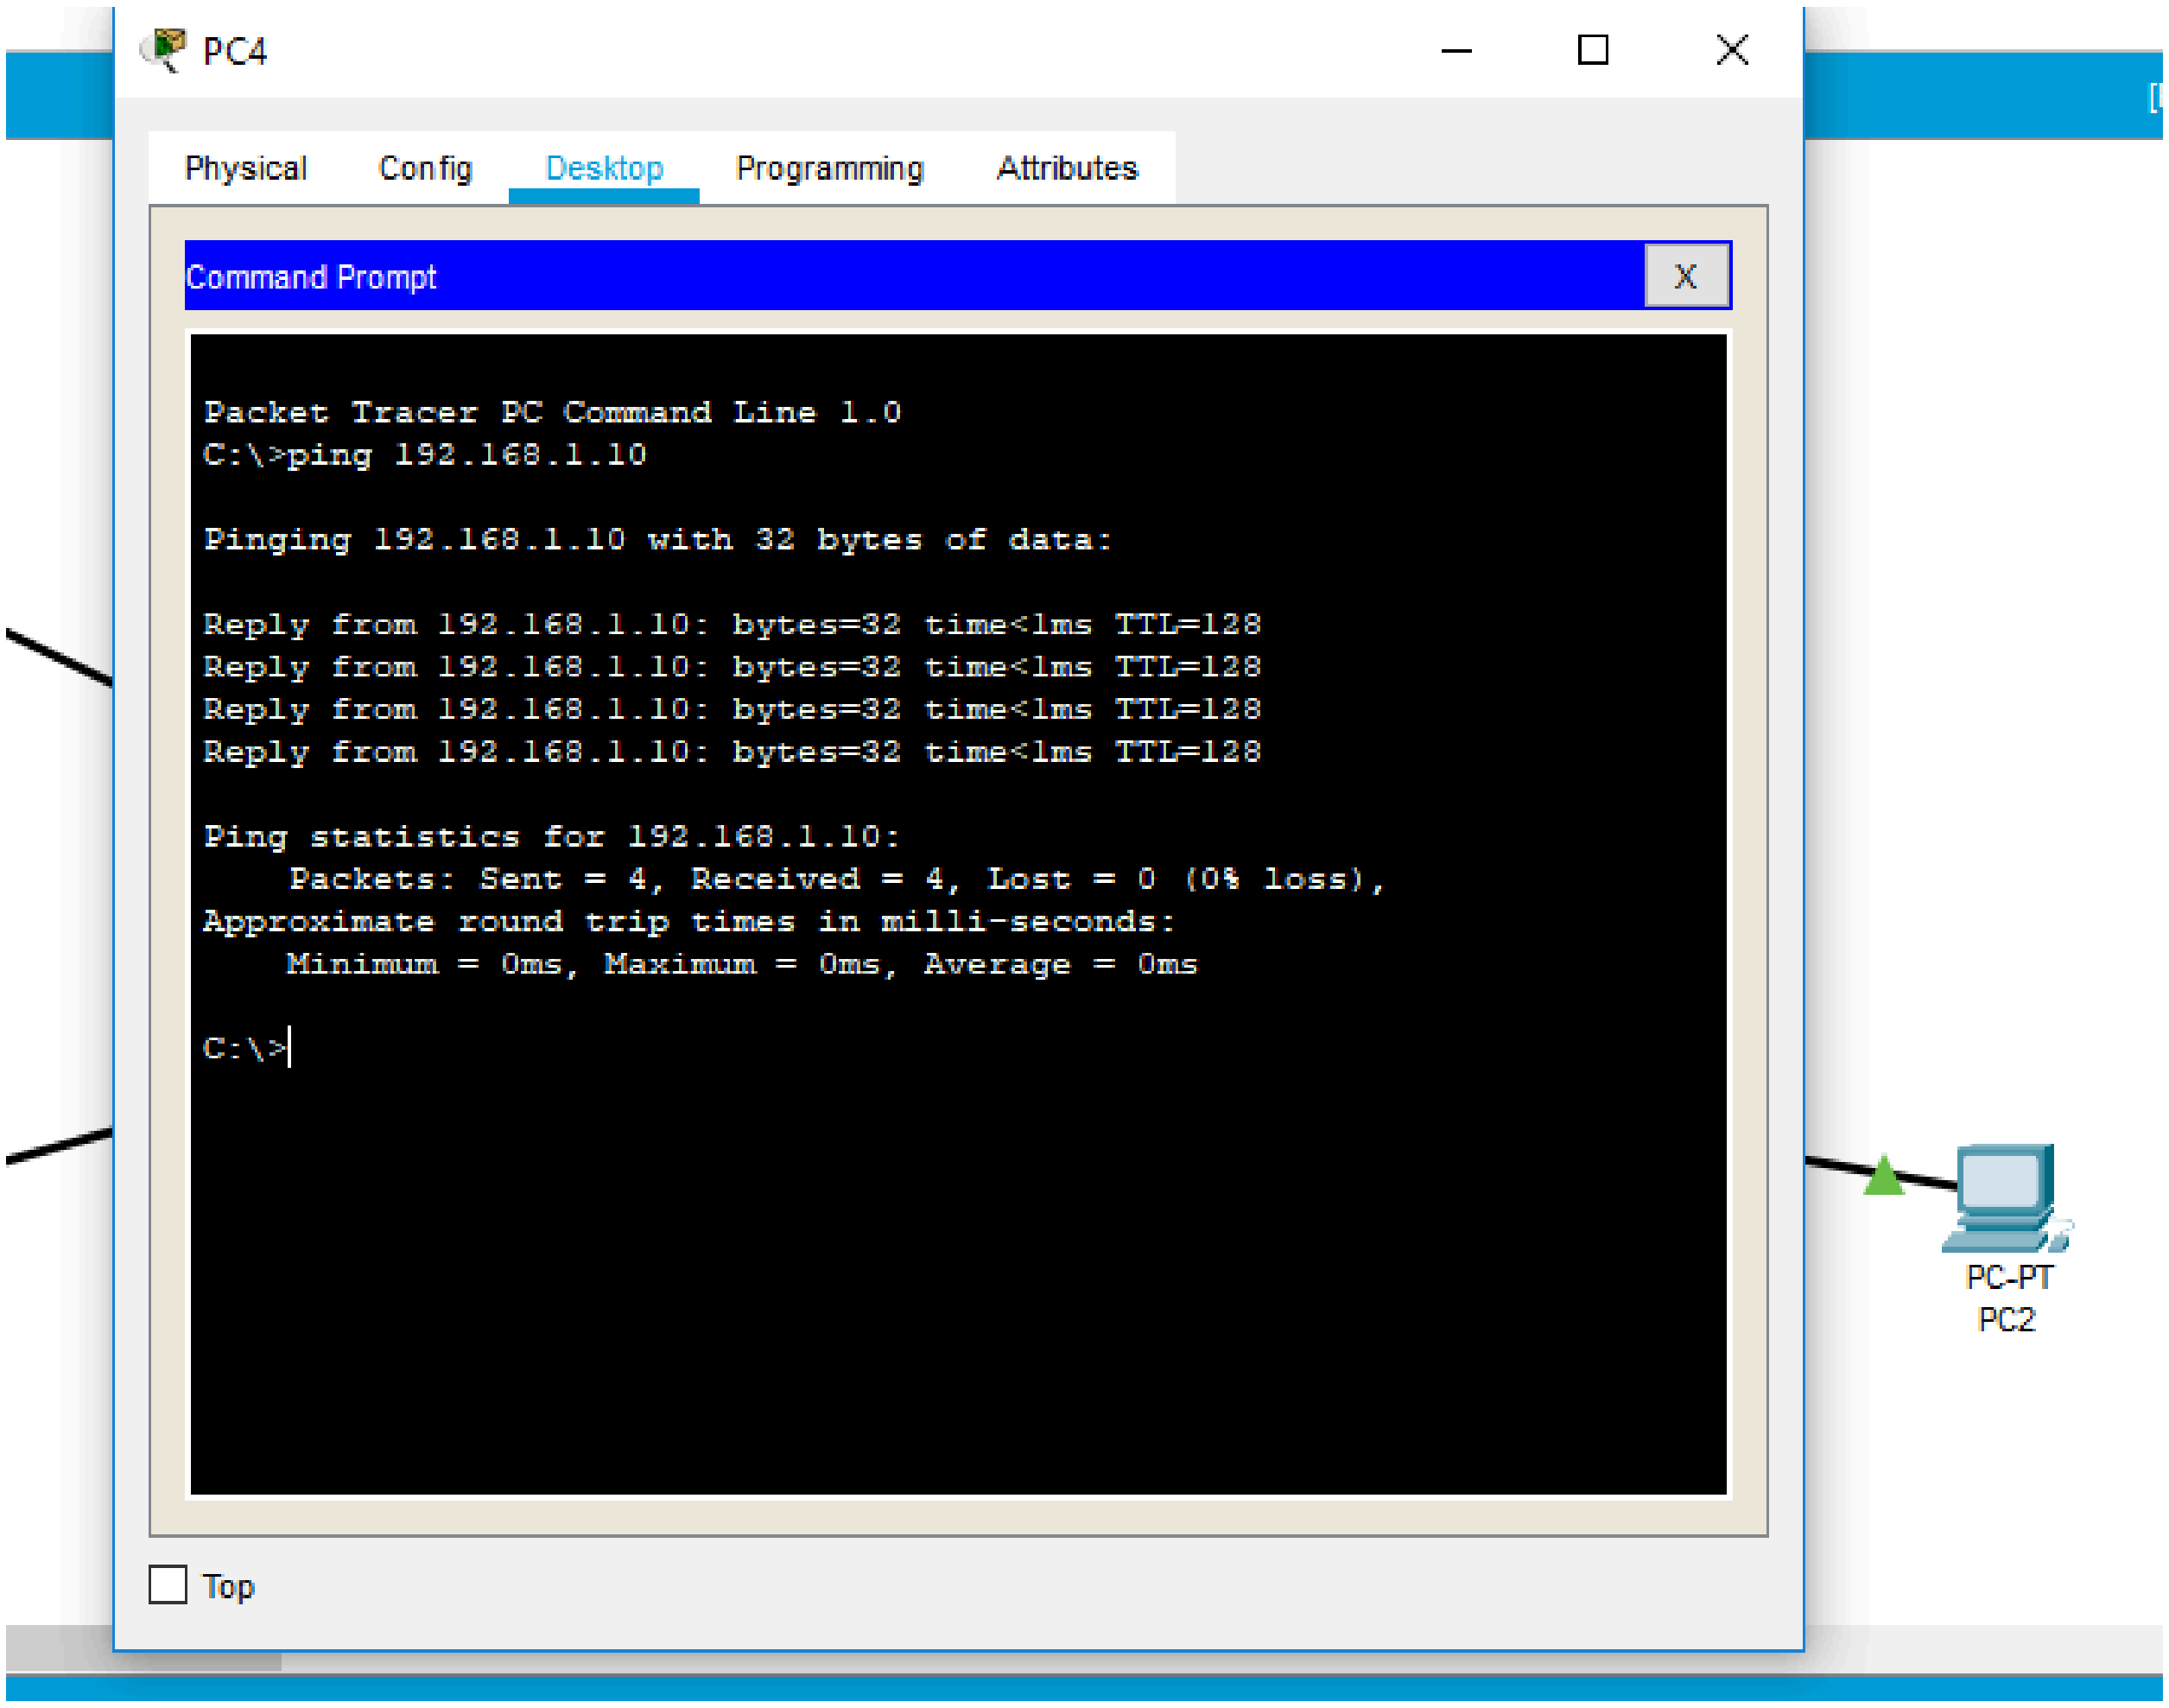
PC4
Physical
Config
Desktop
Programming
Attributes
Command Prompt
X
Packet Tracer PC Command Line 1.0
C:\>ping 192.168.1.10
Pinging 192.168.1.10 with 32 bytes of data:
Reply from 192.168.1.10: bytes=32 time<1ms TTL=128
Reply from 192.168.1.10: bytes=32 time<1ms TTL=128
Reply from 192.168.1.10: bytes=32 time<1ms TTL=128
Reply from 192.168.1.10: bytes=32 time<1ms TTL=128
Ping statistics for 192.168.1.10:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 0ms, Average = 0ms
C:\>
Top
PC-PT
PC2