


HC-SR04 Ultrasonic Sensor

📅 18 September, 2017

🔗 0

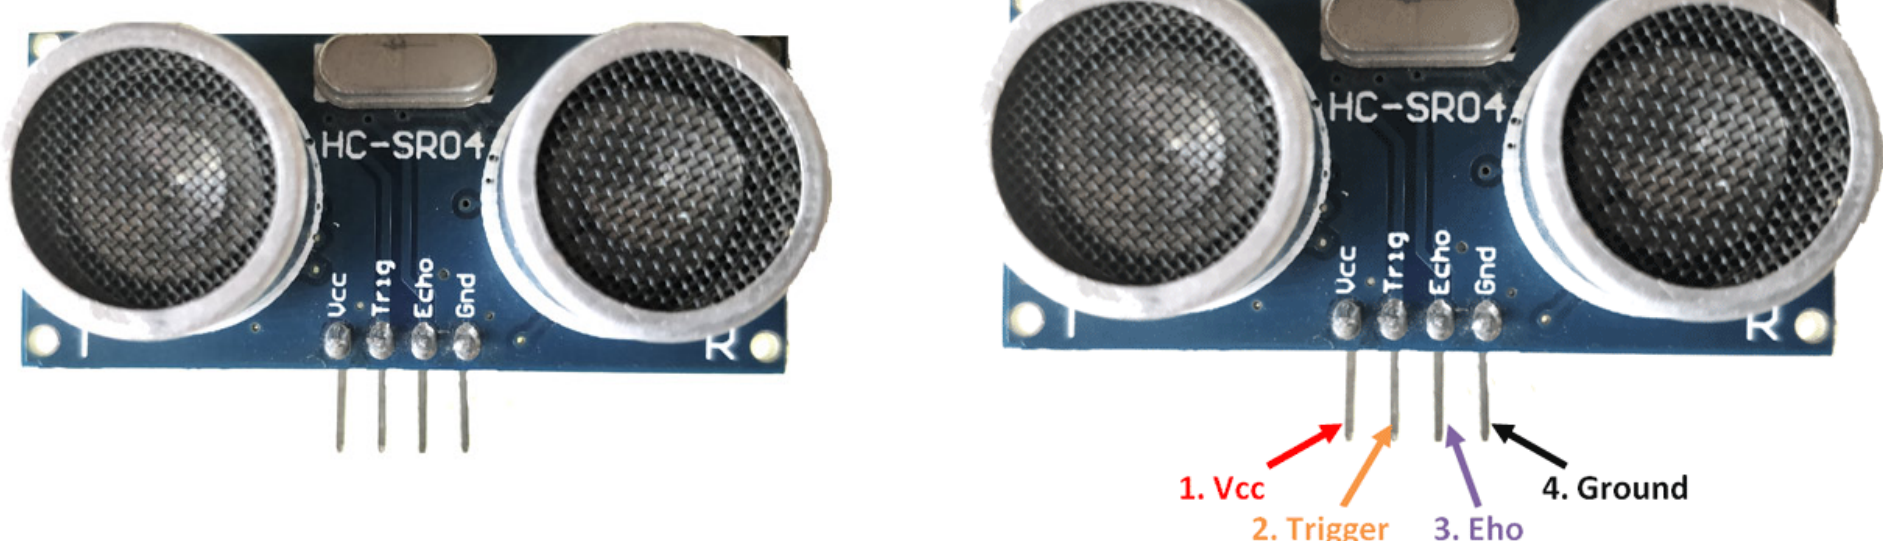

FLEXible Internal FPC Antennas

Pulse Electronics' "flex family" line of internal FPC antennas are a flexible solution for a variety of applications.

MA40H1S-R SMD 40 kHz Transducer

Murata's small transducer is ideal for human, object, and gesture detection and distance measuring

MicroForce Sensors - FMA Series

Enables intelligence in applications and increases efficiency for medical and industrial applications

This website uses cookies to improve user experience. By using the website you are giving your consent to set cookies. For more information, read our [cookie policy](#) and [privacy policy](#)

OKAY, I UNDERSTAND

Ultrasonic Sensor Pin Configuration

Pin Number	Pin Name	Description
1	Vcc	The Vcc pin powers the sensor, typically with +5V
2	Trigger	Trigger pin is an Input pin. This pin has to be kept high for 10us to initialize measurement by sending US wave.
3	Echo	Echo pin is an Output pin. This pin goes high for a period of time which will be equal to the time taken for the US wave to return back to the sensor.
4	Ground	This pin is connected to the Ground of the system.

HC-SR04 Sensor Features

- Operating voltage: +5V
- Theoretical Measuring Distance: 2cm to 450cm
- Practical Measuring Distance: 2cm to 80cm
- Accuracy: 3mm
- Measuring angle covered: <15°
- Operating Current: <15mA
- Operating Frequency: 40Hz

You can Buy [HC-SR04 ultrasonic sensor](#) from here.

Equivalent distance measuring Sensors

US transmitter Receiver pair, IR sensor module, IR sensor pair, IR Analog distance sensor,

HC-SR04 Ultrasonic Sensor - Working

As shown above the **HC-SR04 Ultrasonic (US) sensor** is a 4 pin module, whose pin names are Vcc, Trigger, Echo and Ground respectively. This sensor is a very popular sensor used in many applications where measuring distance or sensing objects are required. The module has two eyes like projects in the front which forms the Ultrasonic transmitter and Receiver. The sensor works with the simple high school formula that

Distance = Speed × Time

The Ultrasonic transmitter transmits an ultrasonic wave, this wave travels in air and when it gets objected by any material it gets reflected back toward the sensor this reflected wave is observed by the Ultrasonic receiver module as shown in the picture below



Now, to calculate the distance using the above formulae, we should know the Speed and time. Since we are using the Ultrasonic wave we know the universal speed of US wave at room conditions which is 330m/s. The circuitry inbuilt on the module will calculate the time taken for the US wave to come back and turns on the echo pin high for that same particular amount of time, this way we can also know the time taken. Now simply calculate the distance using a microcontroller or microprocessor.

How to use the HC-SR04 Ultrasonic Sensor

HC-SR04 distance sensor is commonly used with both microcontroller and microprocessor platforms like Arduino, ARM, PIC, Raspberry Pie etc. The following guide is universally since it has to be followed irrespective of the type of computational device used.


Power the Sensor using a regulated +5V through the Vcc and Ground pins of the sensor. The current consumed by the sensor is less than 15mA and hence can be directly powered by the on board 5V pins (If available). The Trigger and the Echo pins are both I/O pins and hence they can be connected to I/O pins of the microcontroller. To start the measurement, the trigger pin has to be made high for 10uS and then turned off. This action will trigger an ultrasonic wave at frequency of 40Hz from the transmitter and the receiver will wait for the wave to return. Once the wave is returned after it getting reflected by any object the Echo pin goes high for a particular amount of time which will be equal to the time taken for the wave to return back to the sensor.

The amount of time during which the Echo pin stays high is measured by the MCU/MPU as it gives the information about the time taken for the wave to return back to the Sensor. Using this information the distance is measured as explained in the above heading.

Applications

- Used to avoid and detect obstacles with robots like biped robot, obstacle avoider robot, path finding robot etc.
- Used to measure the distance within a wide range of 2cm to 400cm
- Can be used to map the objects surrounding the sensor by rotating it
- Depth of certain places like wells, pits etc can be measured since the waves can penetrate through water

2D model of the component

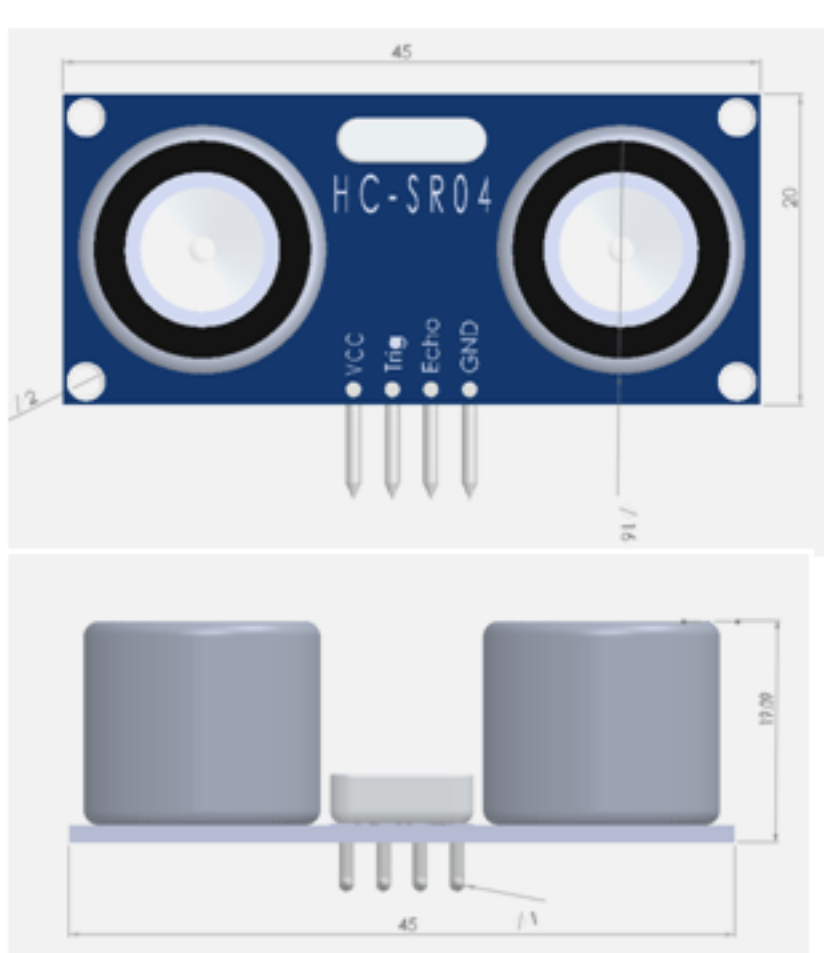




Component Datasheet

[HC SR04 Ultrasonic Sensor Datasheet](#)

Where to Buy

[View more results for HC](#)

Distributor	Part Number	Stock	
 Mouser Electronics	HCF166J680RJ more	20	Buy Now
 Master Electronics	HC-26B more	500	Buy Now
 Electro Sonic	HC-26B more	500	Buy Now

Find and Compare Electronic Components & Parts

Get more part information including pricing, lead time and technical specs using [oemsecrets.com](#) part search

Search a part number or series

Search Now

Upload BOM

Upload a list of part numbers to find the inventory and pricing of multiple part numbers with [oemsecrets.com](#) new BOM Tool.



Get 15% off Farnell and Newark Products

Find your exclusive discount code and get 15% off Farnell and Newark products when buying through [oemsecrets.com](#). Once you have your code simply add the discount code to the Farnell or Newark checkout.

[Get Discount Code](#)

Tags

Ultrasonic Sensor

Related Post

Comments

Leave a Reply

Please [Login](#)

Join 20K+subscribers

We will never spam you.

Enter Your Email Address

SUBSCRIBE

Be a part of our ever growing community.

IMPORTANT LINKS

- [Contact](#)
- [Advertise](#)
- [Privacy Policy](#)
- [Cookie Policy](#)

POPULAR TAGS

- Automotive
- IoT
- Audio
- Medical
- Wearable
- Telecom/5G
- Space
- Electric vehicles