Breadboard Guide

In case this is your first time working with a breadboard, this guide will help you understand how create connections and build circuits on them. The image below shows a mini-size breadboard with an illustration of its internal connections on the right.

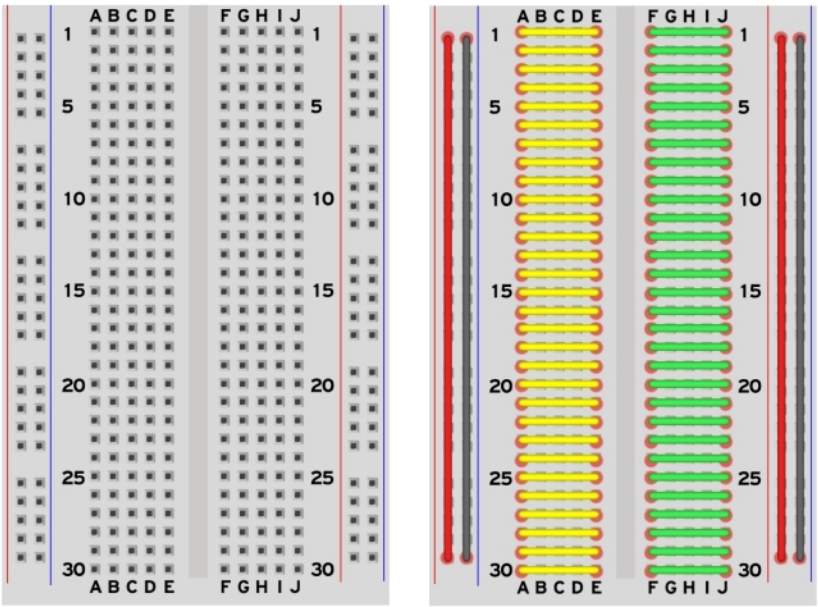

https://www.oreilly.com/api/v2/epubs/urn:orm:book:9781783982943/files/graphics/0193_Appendix_19.jpg

The two sets of vertical bars on either side are called bus strips, and this is conventionally where people add their **power** and **ground** connections. Any holes connected vertically within the same bus strip are electrically connected. That being said, the bus strips on the left and right sides are not connected to each other, so if you want to carry your power or ground signals from one side of the breadboard to the other, you need to add jumper wires accordingly.

In the middle, there are identical 5-column hole patterns arranged in many rows, where each row of five holes is interconnected. Notice the difference in colors between these two sides - the vertical indent along the center line of the breadboard indicates a disconnection between them, meaning there is electrical isolation between the **yellow** and **green** sides. For example, placing a wire in A1 and another one in F1 does not connect them electrically. The same applies if a wire is placed between E5 and E10 - holes in different rows are electrically isolated.