

1. Why Do We Measure?

MEASUREMENT IS THE FOUNDATION OF PHYSICS AND SCIENCE.

Measurement turns observation into knowledge.
It gives us a way to understand, communicate, and
predict the behavior of the physical world.

TOOLS OF MEASUREMENT



RULER
Length



SCALE
Mass



STOPWATCH
Time



ELECTRIC METER
Electric current



THERMOMETER
Temperature



LABORATORY INSTRUMENTS
Many quantities

FOUR KEY REASONS

1 DESCRIBE NATURE

Measurement provides numbers that describe the properties and behavior of the world.



We convert what we see into data we can trust.

2 COMPARE QUANTITIES


Measurement allows us to compare objects, events, and systems in a meaningful way.



Without measurement, there is no comparison.

3 MAKE PREDICTIONS


Measurement reveals patterns and relationships that allow us to predict future outcomes.



Today's data helps us predict tomorrow.

4 TEST PHYSICAL LAWS

Measurement lets us test theories and laws to see if they match reality.



$$F = ma$$

Science advances when measurements agree with physical laws.



From the smallest particle to the largest galaxy, measurement is how we understand the universe.

2. Units: The Language of Physics

THE INTERNATIONAL SYSTEM OF UNITS

The SI (Système International d'Unités) is the modern metric system used by scientists and engineers worldwide.

m

METER
Length



Unit: meter (m)

kg

KILOGRAM
Mass



Unit: kilogram (kg)

s

SECOND
Time



Unit: second (s)

K

KELVIN
Temperature



Unit: kelvin (K)



All other physical units
are derived from these seven.



A

AMPERE
Electric current



Unit: ampere (A)

mol

MOLE
Amount of substance



Unit: mole (mol)

cd

CANDELA
Luminous intensity



Unit: candela (cd)



The SI provides a common language for science, technology, and everyday life.

SI

6. INSTRUMENT RESOLUTION AND MEASUREMENT UNCERTAINTY



Every instrument has a smallest scale division (analog) or resolution (digital). This limits how precisely we can know the true value.

1. RULER



1 mm
(0.1 cm)


Smallest scale division
= 1 mm (0.1 cm)

Uncertainty
= $1 \text{ mm} / 2$
= $\pm 0.5 \text{ mm}$
($\pm 0.05 \text{ cm}$)




If you measure a length of 2.37 cm,
report: 2.37 cm $\pm$ **0.05 cm**

2. ANALOG VOLTMETER

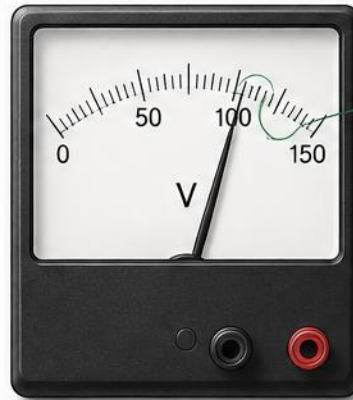

Each small tick
= 2 V



Smallest scale division
= 2 V

Uncertainty
= $2 \text{ V} / 2$
= $\pm 1 \text{ V}$



Pointer reading $\approx 96 \text{ V}$
Report: 96 V $\pm$ **1 V**

3. DIGITAL VOLTMETER



Display resolution
= 0.1 V

96.6
Last digit
(0.1 V place)

Uncertainty
= $0.1 \text{ V} / 2$
= $\pm 0.05 \text{ V}$



Reading = 96.6 V
Report: 96.6 V $\pm$ **0.05 V**

THE RULE (IN CLASS)

Use half of the resolution
(or smallest scale division)
as the reading uncertainty.

EXAMPLE (DIGITAL VOLTMETER)

Resolution
= 0.1 V $\rightarrow$ **96.6 V** $\rightarrow$ Uncertainty
= $0.1 \text{ V} / 2$
= $\pm 0.05 \text{ V}$

Final report:

96.6 V $\pm$ 0.05 V
Measured value Uncertainty
(from resolution)



A higher resolution gives a smaller uncertainty and more precise measurements.



Uncertainty is not a mistake.
It is the limit of what the instrument can tell us.



18. SPEED OF LIGHT USING A MICROWAVE OVEN




- The speed of light is one of the most fundamental constants in physics, with a value of approximately 299,792,458 m/s in a vacuum.
- The fastest human-made object is Voyager 1, traveling at about 17 km/s, which is only 0.000006% of the speed of light.

Let's measure it using a microwave oven and a bar of chocolate (or cheese)!

1. THE IDEA



Microwaves inside the oven produce standing waves. The chocolate (or cheese) melts at the antinodes (maximum electric field). The distance between two melting areas equals one wavelength λ .



Standing wave length:

$$\lambda = 2L$$

where L = distance between adjacent melting areas

2. EXPERIMENT STEPS



1 Place the chocolate (or cheese) in the microwave oven (without rotation) and heat it until it starts to melt. Be careful not to overheat it.



2 Measure the distance L between two adjacent melting areas.



3 Use $\lambda = 2L$ to find the wavelength of the microwaves.





4 Calculate the speed of light using $c = f \lambda$, where f is the frequency of the microwave oven.

3. THE EXPERIMENT (EXAMPLE)



Frequency of this microwave:
2450 MHz = 2.45 GHz

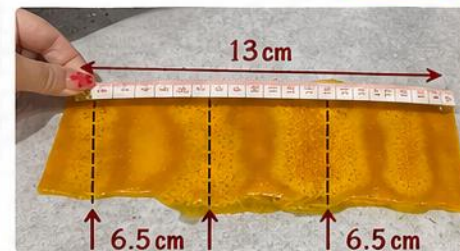

4. CALCULATIONS (EXAMPLE)

Measured distance between adjacent melting areas:

$$L = 6.5 \text{ cm} = 0.065 \text{ m}$$

Wavelength:

$$\lambda = 2L = 2 \times 0.065 = 0.13 \text{ m}$$

Frequency of microwave oven:

$$f = 2450 \text{ MHz} = 2.45 \times 10^9 \text{ Hz}$$

Speed of light:

$$c = f \lambda = (2.45 \times 10^9)(0.13) = 3.185 \times 10^8 \text{ m/s}$$

5. PERCENTAGE ERROR

Accepted value of the speed of light:

$$c = 2.997\,924\,58 \times 10^8 \text{ m/s}$$

Percentage error:

$$\frac{|c_{\text{meas}} - c_{\text{true}}|}{c_{\text{true}}} \times 100\% = 6.3\%$$

where $c_{\text{meas}} = 3.185 \times 10^8 \text{ m/s}$
and $c_{\text{true}} = 2.997\,924\,58 \times 10^8 \text{ m/s}$

6. RESULT



Measured speed of light:

$$c \approx 3.185 \times 10^8 \text{ m/s}$$

(Accepted value: $2.99792458 \times 10^8 \text{ m/s}$)

Percentage error $\approx 6.3\%$

HOW A MICROWAVE OVEN WORKS



A magnetron generates microwaves at a fixed frequency (about 2.45 GHz). These waves reflect inside the metal cavity and interfere, forming standing waves. Food heats up at the antinodes (where the electric field is strongest).

Watch: youtu.be/kp33Zpr00Ck

FUN FACT



Voyager 1 is the fastest human-made object. Its speed ($\sim 17 \text{ km/s}$) is only 0.000006% of the speed of light!

NOTES

- This experiment gives a surprisingly good estimate using simple tools.
- Accuracy depends on careful measurement and uniform melting.
- The frequency (2.45 GHz) is regulated and very stable.



Beautiful physics with everyday kitchen tools!

“ From a bar of chocolate to the speed of light — waves connect the very small with the very vast. ”