




C3: solid tantalum for AMS1117 stability.
Provide copper heatsinking: 0.85W at 500mA; verify enclosure temperature.
USB VBUS and J1 feed +5V: NEVER connect both power sources.

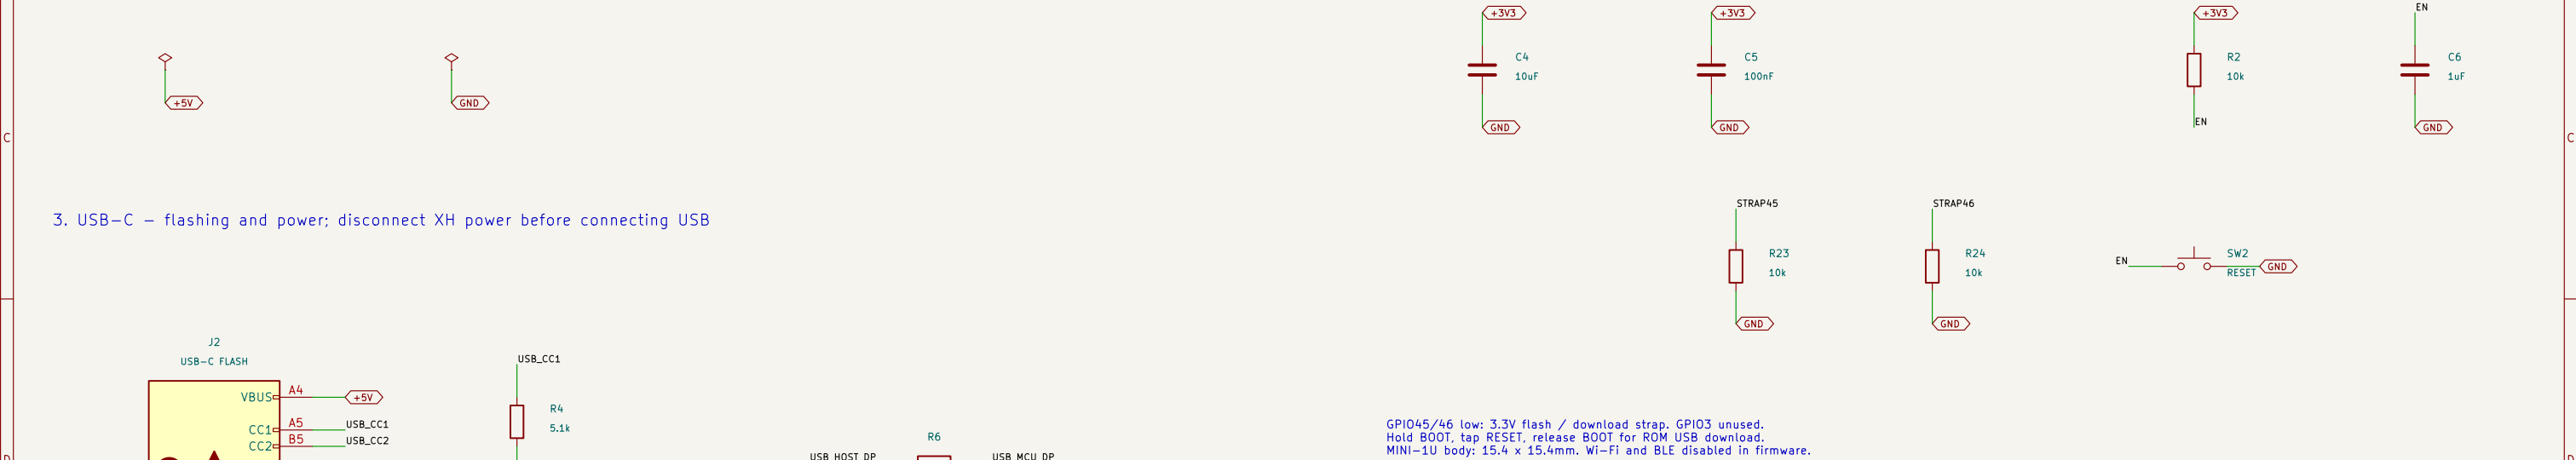

3. USB-C – flashing and power; disconnect XH power before connecting USB

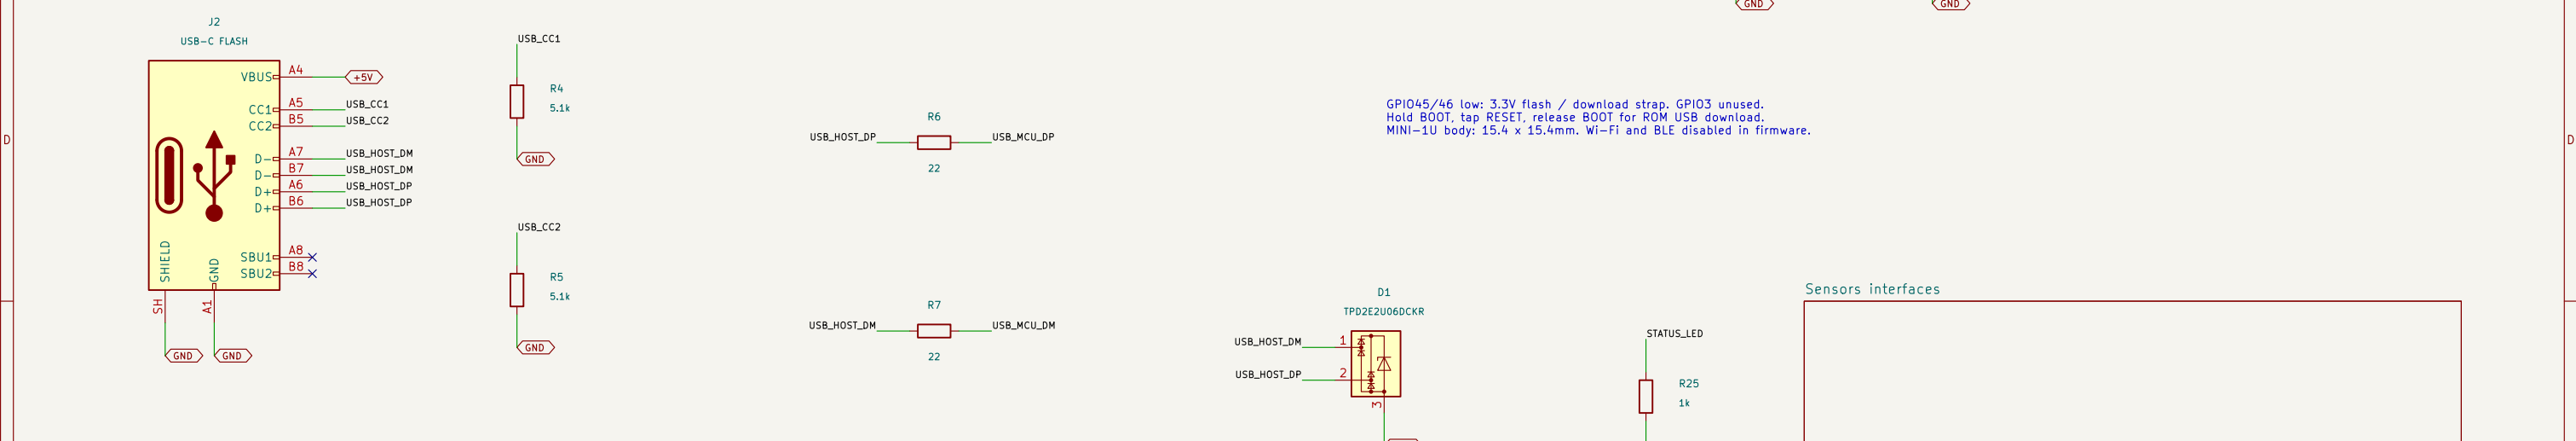

USB flashing: disconnect J1 power, then connect Mac USB-C.
Production: unplug USB-C, then connect J1 to RECOM 5V.
Both feed the same +5V rail; no power OR-ing or reverse blocking.



ESP32 provides its USB data pull-up internally. CC1/CC2: 5.1k to GND.
Route USB as a 90-ohm pair; D1 at J2, R6/R7 at U1.
C1: 4.7uF input bulk to reduce USB plug-in inrush.

C1: 4.7uF input bulk to reduce USB plug-in inrush.	GPIO38 / pad34 HIGH = LED on	Sheet: / File: sensors.kicad_sch
--	---------------------------------	-------------------------------------

Sensors interfaces

STATUS_LED_A File: sensors_interfaces.kicad_sch

ESP32 provides its USB data pull-up internally. CC1/CC2: 5.1k to GND.
Route USB as a 90-ohm pair; D1 at J2, R6/R7 at U1.

C1: 4.7uF input bulk to reduce USB plug-in inrush.	GPIO38 / pad34 HIGH = LED on	Sheet: / File: sensors.kicad_sch
--	---------------------------------	-------------------------------------

Title: Sensors – power, ESP32-S3 and USB flashing





Size: A3	Date: 2026-10-01	Rev: A
----------	------------------	--------

Size: 85	Date: 2025-10-01	Rev: 8
KiCad: E.D.A. 10.0.6		Id: 1/2


Size: A3	Date: 2026-10-01	Rev: A
----------	------------------	--------

Size: 85	Date: 2025-10-01	Rev: 8
KiCad: E.D.A. 10.0.6		Id: 1/2




4. CAN – TJA1051T/3, 5V bus driver / 3.3V logic

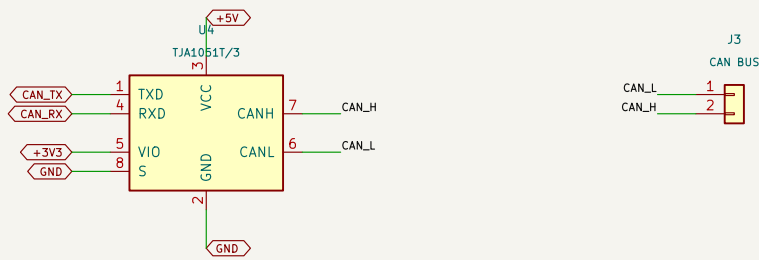

S/SLNT hard-wired low. R11 keeps TX recessive during reset. R12 permanently terminates this bus-end node (120 ohms). J3 has no GND pin: power GND must run alongside CAN pair.







6. DIGMESA – open collector, existing RC filter








GPIO41 input; internal pull-up disabled. 1k x 10nF = 10us. Digmesa powered from 5V; signal pulled to 3.3V only. Pin order: GND brown / 5V green / SIGNAL yellow. RC discharge speed also depends on sensor/cable impedance.

8. BOILER SSR – powered 5V output, HIGH command = ON

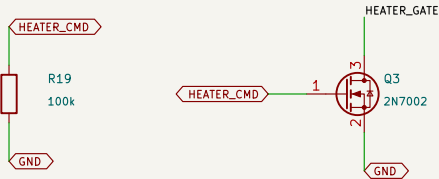



J8: SSR (-) -> pin1 GND; SSR (+) -> pin2 switched 5V. Q3 pulls Q2 gate LOW; Q2 supplies the SSR current. R19/R21/R22 ensure off with GPIO floating or 3V3 absent. Shared GND. Gate pull-up current about 0.5mA when ON; load <=100mA; no mains.

5. SHARED I2C – 3.3V, Grove/HY2.0 cable order



Grove opening up: left-to-right GND / 3V3 / SDA / SCL. Numbered pads: 1=SCL yellow, 2=SDA white, 3=3V3 red, 4=GND black. Addresses: dimmer 0x50 / XDB401 0x7F / TMP102 0x48. TMP102 ADD0 grounded; ALERT unused. Mount away from LDO heat. Pull-ups always fitted: 2.35k effective with XDB401 attached. 100kHz initial bus speed; remote modules provide local supply decoupling.

7. VALVE SSR – 3.3V signal / 5V supply



GPIO36, 3.3V signal / 5V VCC; default LOW.

CAN-only / USB flash power OR external 5V

CoffeeFlow

Sheet: /Sensors interfaces/

File: sensors_interfaces.kicad_sch

Title: Sensors – CAN, I2C, flowmeter and SSR outputs

Size: A3

Date: 2026-10-01

Rev: A

KiCad E.D.A. 10.0.6

Id: 2/2