



Search

Modules

AD/DA Converter

Gravity: GP8403 2-Channel I2C 0-10V DAC Module (SKU: DFR0971)

Gravity: ADS1115 16-Bit ADC Module (SKU: DFR0553)

Gravity: Analog Current to Voltage Converter Module (4~20mA) (SKU: SEN0262)

Gravity: GP8302 I2C to 0~25mA Analog Current Module (SKU: DFR0972)

Gravity 2-Channel 15Bit 0-10V ADC Module (SKU: DFR1184)

Gravity: GP8101S PWM to 0-5V/10V DAC Module (SKU: DFR1036)

Gravity: GP8413 2-Channel 15-bit I2C DAC Module (SKU: DFR1073)

Gravity: GP8630N I2C/PWM to ±10V / 4-20mA DAC Module (SKU: DFR1230)

Gravity: GP8211S I2C to 0-5V/10V DAC Module (SKU: DFR1071)

Gravity: GP8600 1-Channel I2C & PWM to 0-5V / 0-10V / 4-20mA DAC Module (SKU: DFR1229)

Gravity: GP8501 2-Channel PWM to 0-2.5V/VCC DAC Module (SKU: DFR1037)

Gravity: MCP4725 12-Bit I2C DAC Module (SKU: DFR0552)

Gravity: GP8512 1-Channel 15bit I2C DAC Module (SKU: DFR1035)

Gravity: GP8503 2-Channel 12-bit I2C DAC Module (SKU: DFR1034)

Gravity: GP8403 2-Channel I2C 0-10V DAC Module

SKU: DFR0971

This 2-Channel I2C DAC module can output a voltage of 0-10V, which is a standard driver in industrial applications. It can be widely used with most 0-10V devices on markets such as light controllers, inverters, valves, pumps, etc., by Arduino programming. Besides, this module supports 8 different I2C addresses, which can be changed using the on-board DIP switch, allowing a cascade of 16 devices.



Buy now

DOWNLOADABLE RESOURCES


Dimension Schematics CAD STP Files Library GitHub

Docs Tech Specs Certifications

Specification

Parameter	Value
Operating Voltage	3.3V~5V
I2C Interface	PH2.0-4P (Gravity Line Sequence)
Chip Type	GP8403
Input Signal	12Bit (0x000 - 0xFFFF)
Input I2C Signal High Level	2.7V - 5V
VOUT0 Output Voltage	0-10V/0-5V
VOUT1 Output Voltage	0-10V/0-5V
Output Voltage Error	< 0.5%
Linearity Error of Output Voltage	0.1%
Power Consumption	< 4mA
Output Short-circuit Protection	-

Pinout

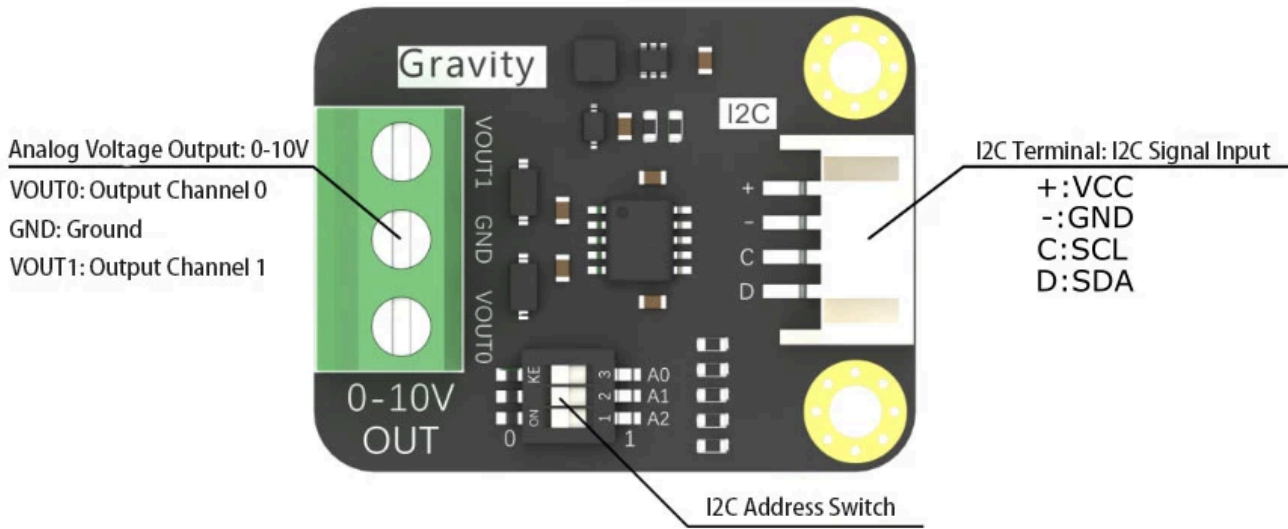

Function Description

Name	Description	Remarks
I2C Terminal	I2C Signal Port	
I2C Address Switch	Adjust the DIP switch values of A0, A1 and A2 to change the moudle I2C address	The correspondence between I2C address and DIP switch is shown in the table below
Analog Voltage Output	VOUT0 and VOUT1 can output 0-10V or 0-5V independently	

I2C Address Table

A0	A1	A2	I2C Address
0	0	0	0x58
0	0	1	0x59
0	1	0	0x5A
0	1	1	0x5B
1	0	0	0x5C
1	0	1	0x5D
1	1	0	0x5E
1	1	1	0x5F

Was this article helpful?



Information

- About Us
- Warranty
- Terms & Conditions
- Shipping
- Payment
- FAQ

Customer Service

- DFRobot Distributors
- Contact Us
- Site Map

My Account

- Affiliates
- Specials



Sign up for exclusive offers!

Your email address

>

Like us on

