
# MicroDuck NP-F550 Banana PCB + PPTC

0.5-PPTC / positive-side fuse / right wire exit / prototype

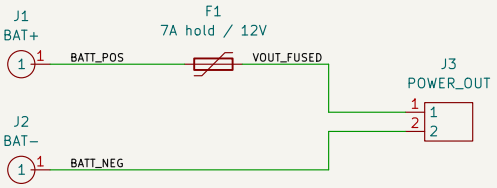


J1 -> F1.1/F1.2 -> J3.1 -> HUB CN1.2 (VIN+)
J2 ---------------> J3.2 -> HUB CN1.1 (GND-)

F1 reference: Littelfuse 2920L700/12MR, 2920 package.
Ihold 7 A / Itrip 14 A at 20 C; Vmax 12 V. 7 A is NOT an instant cutoff.
Check motor startup, warm hold current and fault heating on the actual robot.

Board 39.19 x 6.79 x 1.6 mm; 1 oz copper each side.
F1 on LEFT; J3 moved 8 mm RIGHT to the revised holder notch.
J3.1 LEFT fused positive / J3.2 RIGHT direct battery negative.

The PPTC limits current when hot; clear the fault and disconnect power to reset.
Not a substitute for battery protection or individual servo protection.
3D fuse is a reference maximum-envelope model; actual substitute and cable fit unverified.

Original outline/contact design: jyg9/microduck-community-kit, CERN-OHL-P v2.
2026-11-03: three direct 3 mm front tracks; no back tracks; no vias.

Based on jyg9 banana_pcb 0.2; CERN-OHL-P v2

Sheet: /
File: banana_pptc.kicad_sch

**Title: MicroDuck Banana - positive-side PPTC prototype**

| Size: A4 | Date: 2026-11-03 | **Rev: 0.5-PPTC** |
|---|---|---|
| KiCad E.D.A. 10.0.7 | | Id: 1/1 |