



WIFI4_SOC_QFN48

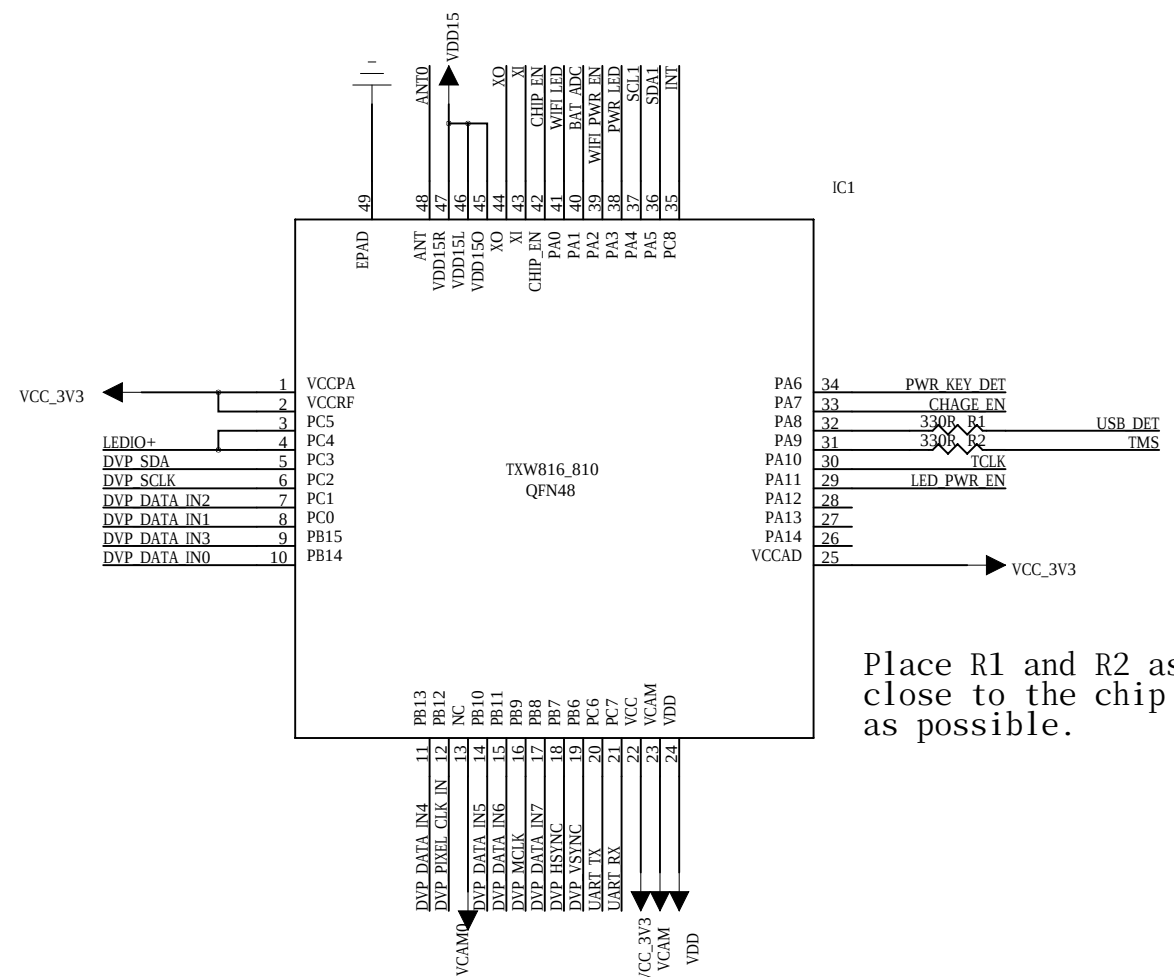

TXW806/816 Pin Differences

PIN	13	35	36	37	38	39	40	41
TXW806	VCAM	PA5	PA4	PA3	PA2	PA1	PA0	PA15
TXW816	NC	PC8	PA5	PA4	PA3	PA2	PA1	PA0

BYPASS FILTER CAPACITOR

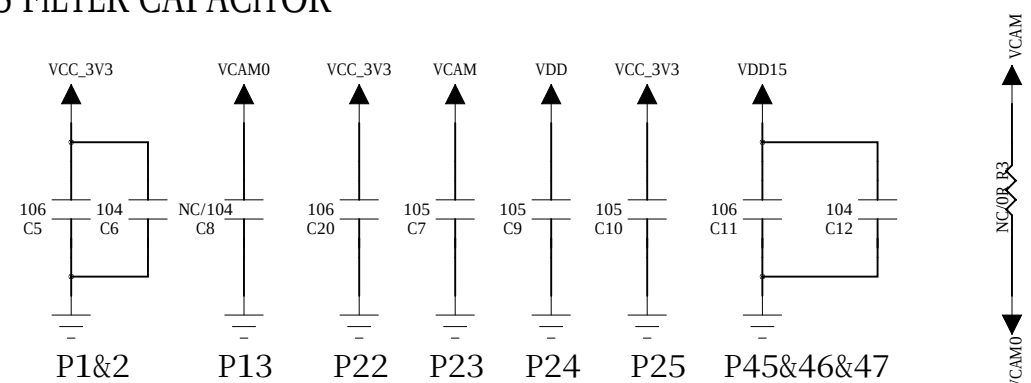


Filter capacitors should be placed as close to the pin as possible

Differences in component placement/
materials between TXW806 and TXW816 chips


IC	R3	C8
TXW806	0R	104
TXW816	NC	NC

CRYSTAL

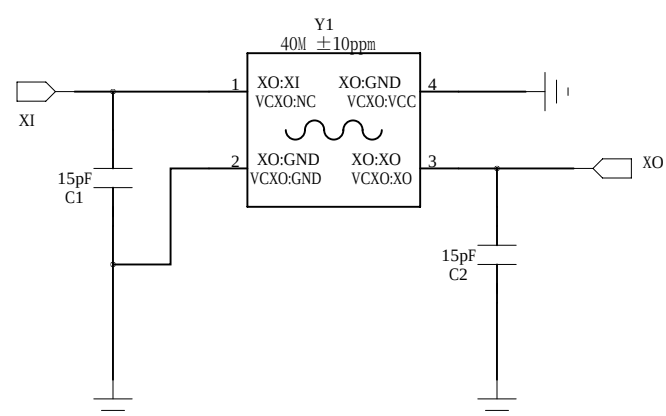


Crystal oscillator requirement: 40 MHz,
±10 ppm frequency tolerance,
with 15 pF or higher load capacitance.

ANT

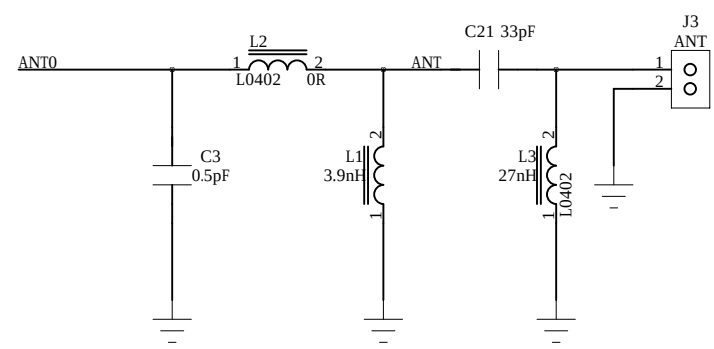


RF section PCB traces must use 50 Ω impedance.
Matching components should be adjusted
according to the actual antenna used.

TEST POINT

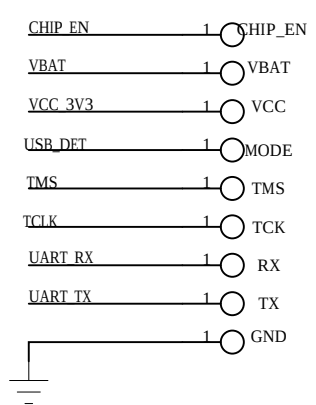


Ensure all test points
needed for mass
production are kept

SENSOR INTERFACE

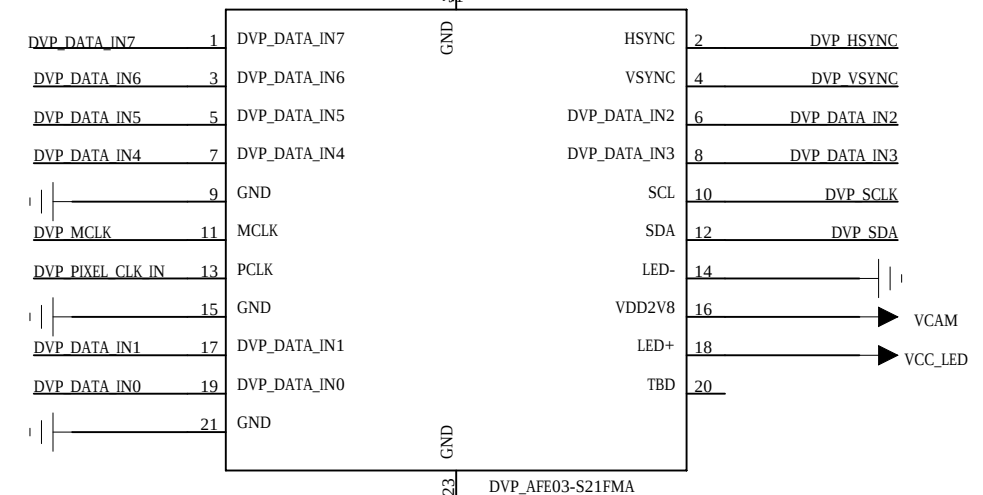


Ensure correct Pin 1 position and
orientation for the camera connector

GSENSOR

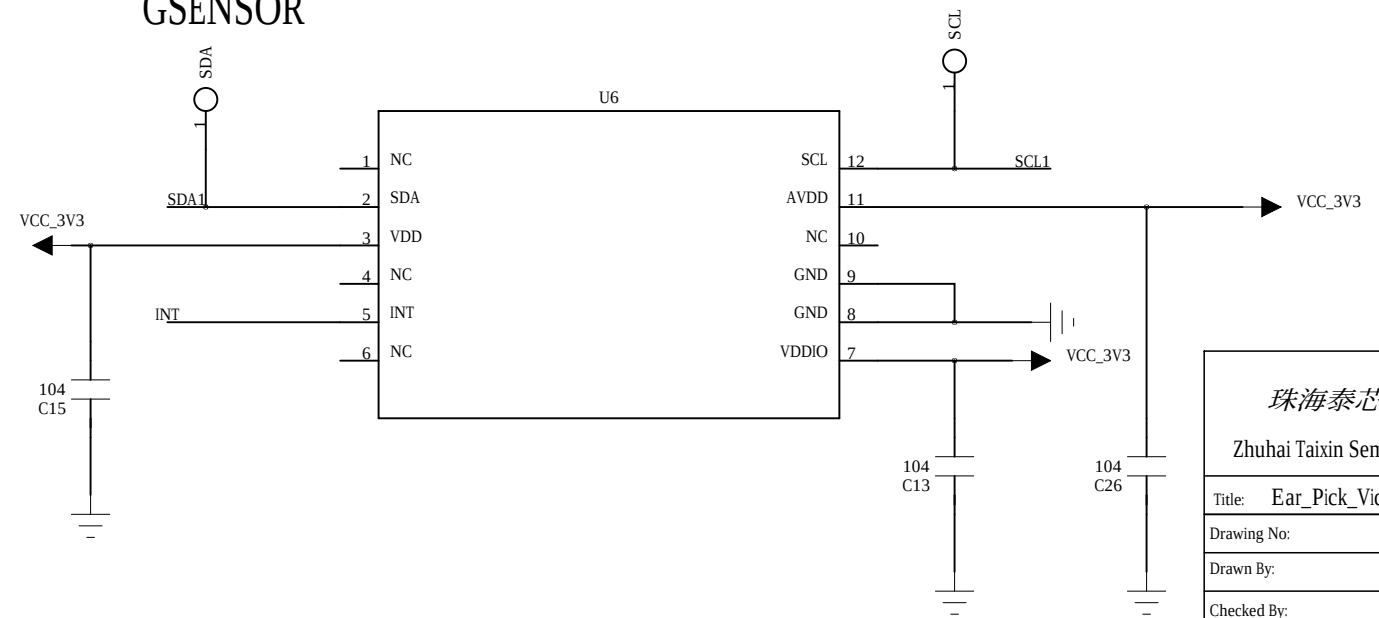


珠海泰芯半导体有限公司	
Zhuhai Taixin Semiconductor Co.,Ltd	
Title: Ear_Pick_Video_SW_KEY	
Drawing No:	Version: V1.1
Drawn By:	Date: 20230926
Checked By:	
Approved By:	
Size: A3	Sheet:

TYPE-C USB

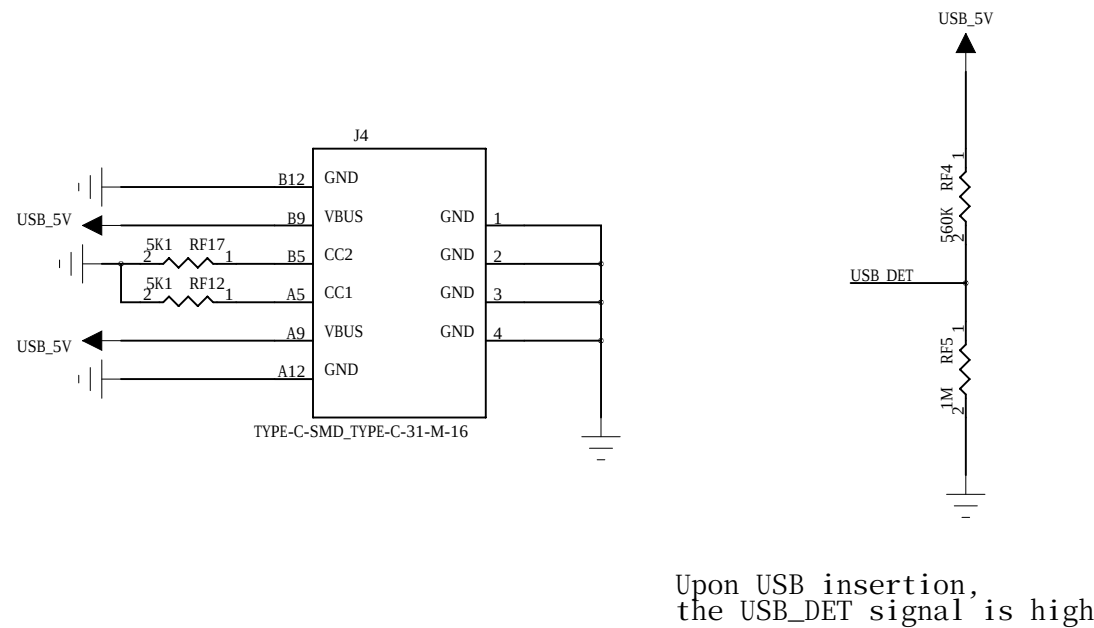


Upon USB insertion,
the USB_DET signal is high


Lithium Charging Circuit

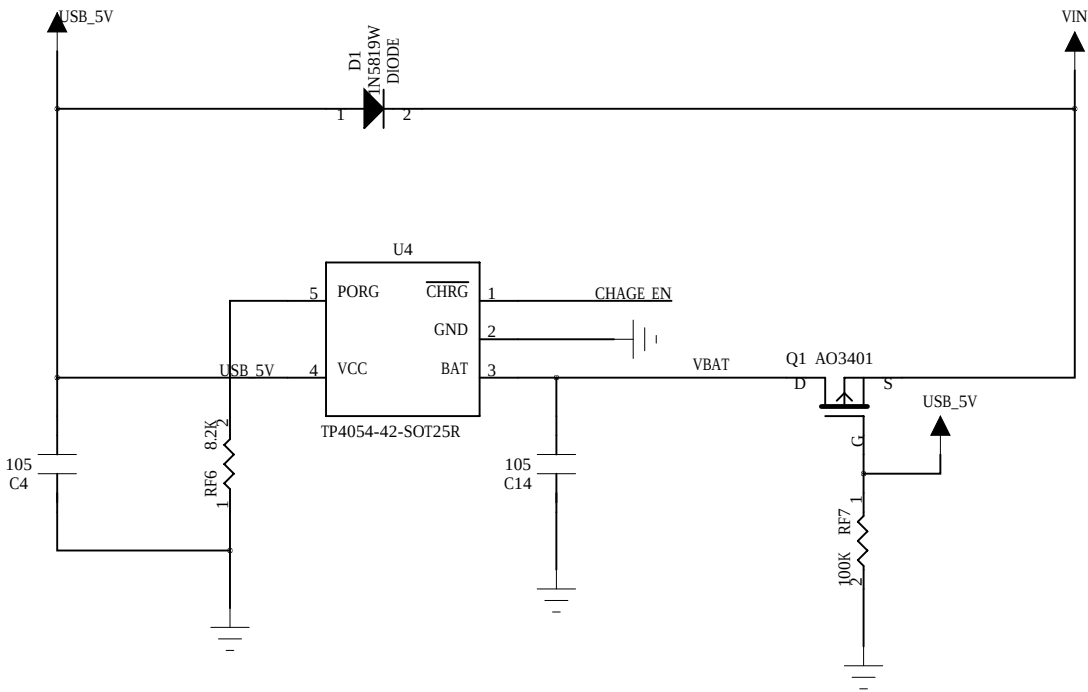

Battery Connector

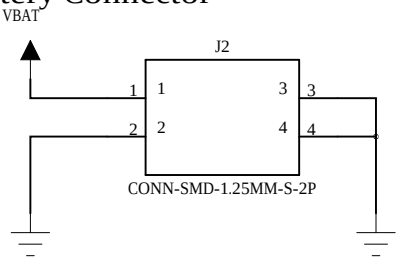


Battery Level Detection

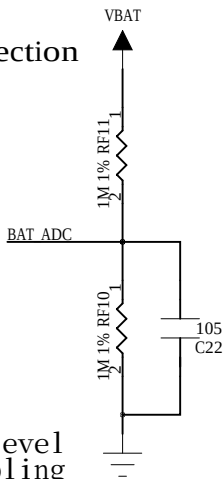


Lithium battery level
detection – sampling
resistors must have at
least 1% accuracy

PWR SW

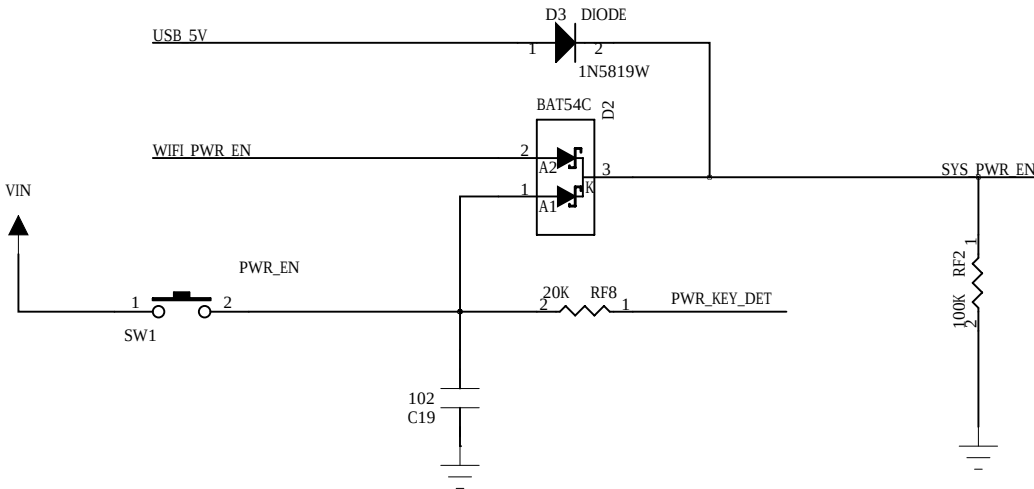


Power On: Default state is low. After the button is pressed for 0.8s, the system starts and WIFI_PWR_EN goes high. Power Off: When PWR_KEY_DET detects a long press of 1.5s, the system powers off.

SYS VCC 3V3

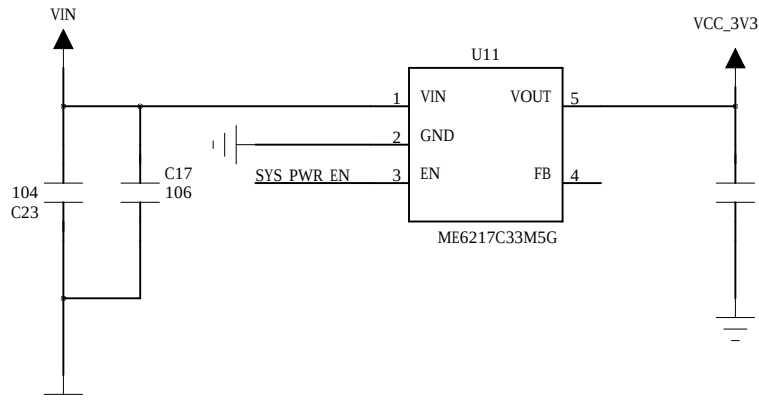


- The 100 kΩ pull-down resistor on RF2 must be retained.
- Use an LDO with low dropout voltage as the first choice, and the output current must be no less than 500 mA.
- Typical dropout voltage: 100 mV @ 300 mA

CAMERA LED

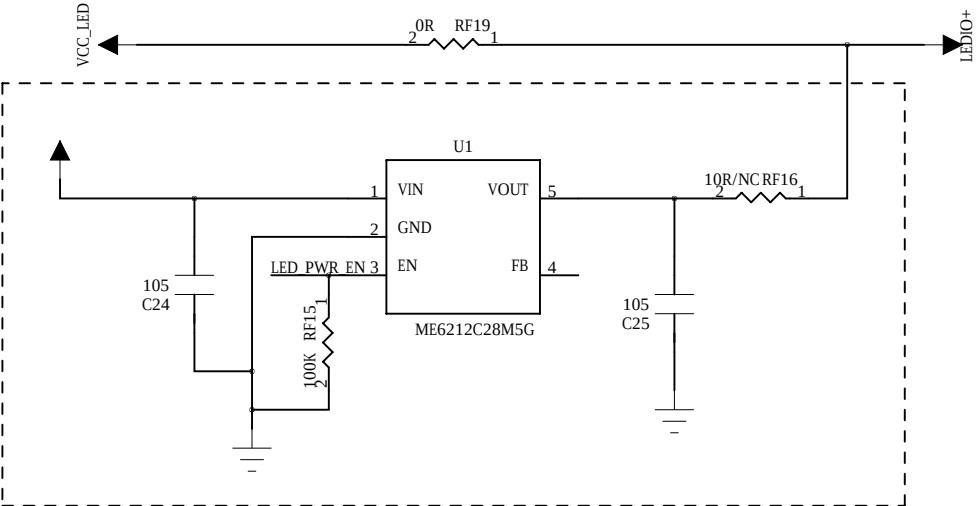

LEDs are powered by MCU I/O by default. For higher brightness, add a dedicated LED power supply chip.

LED Indicator

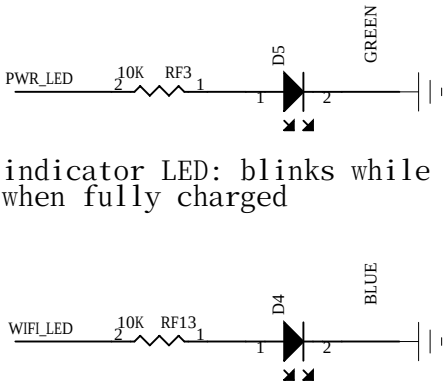

Charging indicator LED: blinks while charging,
stays on when fully charged

Wi-Fi status LED: blinks when not connected,
stays on when connected

珠海泰芯半导体有限公司	
Zhuhai Taixin Semiconductor Co.,Ltd	
Title: Ear_Pick_Video_SW_KEY	
Drawing No:	Version:V1.1
Drawn By:	Date: 20230926
Checked By:	
Approved By:	
Size: A3	Sheet: