


Experiment 5 Assignment

Divit Kejriwal
2025A7PS0409U
Date: 6-10-2026

Q1: 8-to-3 Priority Encoder

<https://edaplayground.com/x/vgBh>

Code:

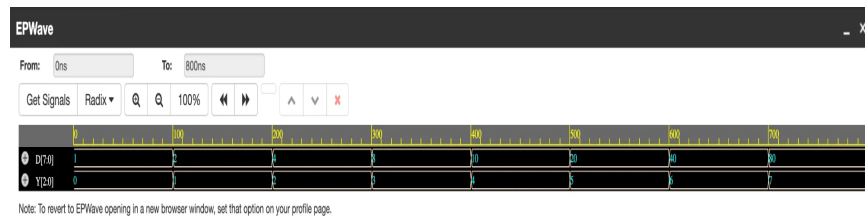

Waveform:

Brought to you by DOULOS

Notes: Does not endorse testing material here. Not applicable to EDA Playground.

Languages & Libraries

Tools & Simulators

Cadence Xcelium 25.03

Compile Options

Timescale 1ns/1ns -ysw

Run Options

access +rw

Use run.do Tcl file

Use run.bash shell script

Open EPWave after run

Show output text file

Show output SVG file

Download files after run


```
1 module tb_encoder;
2 reg [7:0] D;
3 wire [2:0] Y;
4 initial
5 begin
6   $dumpfile ("dump.vcd");
7   $dumpvars (1, tb_encoder);
8   #000 D <= 8'b00000001;
9   #100 D <= 8'b00000010;
10  #100 D <= 8'b00000100;
11  #100 D <= 8'b00001000;
12  #100 D <= 8'b00010000;
13  #100 D <= 8'b00100000;
14  #100 D <= 8'b01000000;
15  #100 D <= 8'b10000000;
16  #100 $stop;
17 end
18 encoder_8to3 U1(Y,D);
19 endmodule
```

```
1 module encoder_8to3 (Y,D);
2 input [7:0] D;
3 output reg [2:0] Y;
4 always @(D)
5 begin
6   case (D)
7     8'b00000001: Y = 3'b000;
8     8'b00000010: Y = 3'b001;
9     8'b00000100: Y = 3'b010;
10    8'b00001000: Y = 3'b011;
11    8'b00010000: Y = 3'b100;
12    8'b00100000: Y = 3'b101;
13    8'b01000000: Y = 3'b110;
14    8'b10000000: Y = 3'b111;
15    default: Y = 3'bxxx;
16  endcase
17 end
18 endmodule
```

Q2: 2-to-4 Decoder with Active-Low Enable

<https://edaplayground.com/x/Ftfg>

Code:

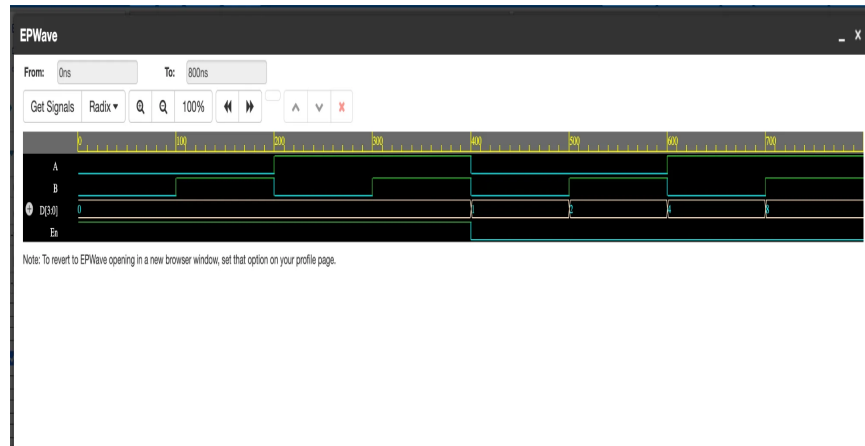

Waveform:

Brought to you by **DOULOS**

Double does not endorse training material from other suppliers or EDA Playground

• Languages & Libraries

• Tools & Simulators

Cadence Xcelium 25.03

Compile Options

-timescale 1ns/1ns -sysv

Run Options

-access +rw

☐ Use run.do Tcl file

☐ Use run.bash shell script

☒ Open EPWave after run

☐ Show output text file

☐ Show output SVG file

☐ Download files after run

testbench.sv

```
1 module tb_decoder;
2 reg A,B,En;
3 wire [3:0] D;
4 initial
5 begin
6   $dumpfile("dump.vcd");
7   $dumpvars(1,tb_decoder);
8   #000 En=1; A=0; B=0;
9   #100 En=1; A=0; B=1;
10  #100 En=1; A=1; B=0;
11  #100 En=1; A=1; B=1;
12  #100 En=0; A=0; B=0;
13  #100 En=0; A=0; B=1;
14  #100 En=0; A=1; B=0;
15  #100 En=0; A=1; B=1;
16  #100 $stop;
17 end
18 decoder_2to4 U1(D,A,B,En);
19 endmodule
```

design.sv

```
1 module decoder_2to4 (D,A,B,En);
2 input A,B,En;
3 output [3:0] D;
4 assign D[0] = (~A)&B&~En;
5 assign D[1] = (~A)&B&En;
6 assign D[2] = (A)&B&~En;
7 assign D[3] = (A)&B&En;
8 endmodule
```

Q3: 4-bit Magnitude Comparator

<https://edaplayground.com/x/Vvvi>

Code:

brought to you by DOULOS

tools does not endorse training material here

the supplies on EDA Playground.

Languages & Libraries

Tools & Simulators

Cadence Xcelium 25.03

Compile Options

timescale 1ns/1ns -sysv

Run Options

access +rw

Use run.do To file

Use run.bash shell script

Open EPWave after run

Show output text file

Show output SVG file

Download files after run


testbench.vv

```
1 module tb_comparator;
2 reg [3:0] A,B;
3 wire L,G,E;
4 initial
5 begin
6 $dumpfile ("dump.vcd");
7 $dumpvars (1, tb_comparator);
8 #000 A=4'b0000; B=4'b1111;
9 #100 A=4'b1111; B=4'b0000;
10 #100 A=4'b0000; B=4'b0000;
11 #100 A=4'b1111; B=4'b1111;
12 #100 A=4'b0101; B=4'b1000;
13 #100 A=4'b1010; B=4'b0011;
14 #100 A=4'b1001; B=4'b1001;
15 #100 $stop;
16 end
17 comparator_4bit U1(L,G,E,A,B);
18 endmodule
```

design.vv

```
1 module comparator_4bit (L,G,E,A,B);
2 input [3:0] A,B;
3 output reg L,G,E;
4 always @(A or B)
5 begin
6 if (A > B)
7 begin
8 G = 1; E = 0; L = 0;
9 end
10 else if (A == B)
11 begin
12 G = 0; E = 1; L = 0;
13 end
14 else
15 begin
16 G = 0; E = 0; L = 1;
17 end
18 end
19 endmodule
```

Waveform:

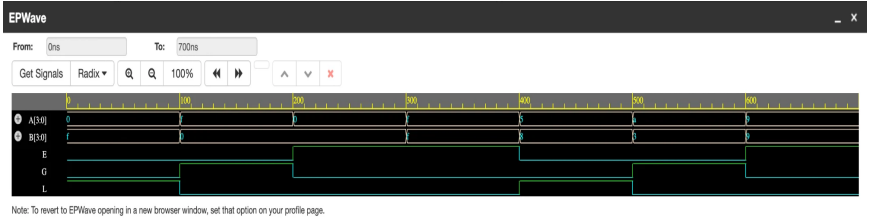

Note: To revert to EPWave opening in a new browser window, set that option on your profile page.