

GF-T16: a fixed-field float with a balanced-ternary exponent, measured against tekum16 and on open-source silicon

Dmitrii Vasilev
ORCID 0009-0008-4294-6159
admin@t27.ai

8 August 2026

Abstract

Tapered formats such as takum [1] and its balanced-ternary descendant tekum [2] buy dynamic range with a variable-length regime field. The field costs a barrel-shift decode on any fabric, and precision tapers towards the ends of the range. We describe **GF-T16**, a 16-bit float that keeps its fields fixed and places the exponent in balanced ternary: four trits give $3^4 = 81$ exponent steps and, on a ternary fabric, the exponent add is a native operation rather than a base conversion. The mantissa stays 9 bits at every magnitude.

Two sets of measurements are reported. On accuracy, against a structural model of tekum16, GF-T16 ties near unity and shows $2.84\times$ and $5.53\times$ lower mean relative round-trip error at $|e| \in [8, 20)$ and $|e| \in [20, 38)$; the bins are powers of two, and we say so because read as decades the far result is an overflow rather than a win. On cost, the multiplier was synthesised and routed on a Xilinx XC7A200T through an entirely open flow: 12, 50, 212 and 1,477 LUTs at 161.1, 153.2, 131.7 and 83.3 MHz for GF-T4/8/16/32, one cycle of latency, no DSP blocks. The ternary-fabric argument remains architectural, since no ternary process exists to synthesise on; the binary-fabric figures are the measured claim, and they suggest the format is inexpensive even where its native advantage does not apply.

We also report two width defects found while measuring, because both generalise: declaring the datapath 32 bits wide cost five times the arithmetic on a fabric, and at GF-T32 it silently truncated a 52-bit product. Equivalence for every change is established by exhaustive or near-exhaustive sweep rather than by argument.

Artifacts. Oracle, RTL, testbenches and the exact commands are public; every figure in this paper can be regenerated from them.

1 The format

$$\text{GF-T16} = [s \mid E=4 \text{ balanced-ternary trits} \mid M=9 \text{ bits}], \quad v = (-1)^s \left(1 + \frac{M}{2^9}\right) 2^e, \quad e = \sum_i t_i 3^i \in [-40, 40]. \quad (1)$$

Three properties follow from the layout rather than from tuning.

No regime decode. The dominant cost in a tapered format is the variable-length regime: it must be located, its length counted, and the significand barrel-shifted into place. That cost is paid on any fabric, ternary included. Fixed fields make it a bit slice.

The exponent is already ternary. Four balanced-ternary trits give $3^4 = 81$ exponent steps. On a ternary fabric the exponent add is native — no binary carry, no conversion between bases.

Precision does not taper. Nine mantissa bits at every magnitude, where a tapered format narrows towards the extremes. This is the mechanism behind the accuracy result of Section 2: the win appears where the comparison format has spent its mantissa on range.

Table 1: Round-trip mean relative error. Bins are powers of two, not decades.

magnitude	GF16 (φ)	GF-T16	tekum16	GF-T16 vs tekum16
$ e < 8$	3.43e-4	3.56e-4	3.27e-4	0.92 $\times$ (tie)
$ e 8\text{--}20$	3.57e-4	3.52e-4	1.00e-3	2.84$\times$
$ e 20\text{--}38$	6.98e-3 (479 clip)	3.53e-4	1.95e-3	5.53$\times$

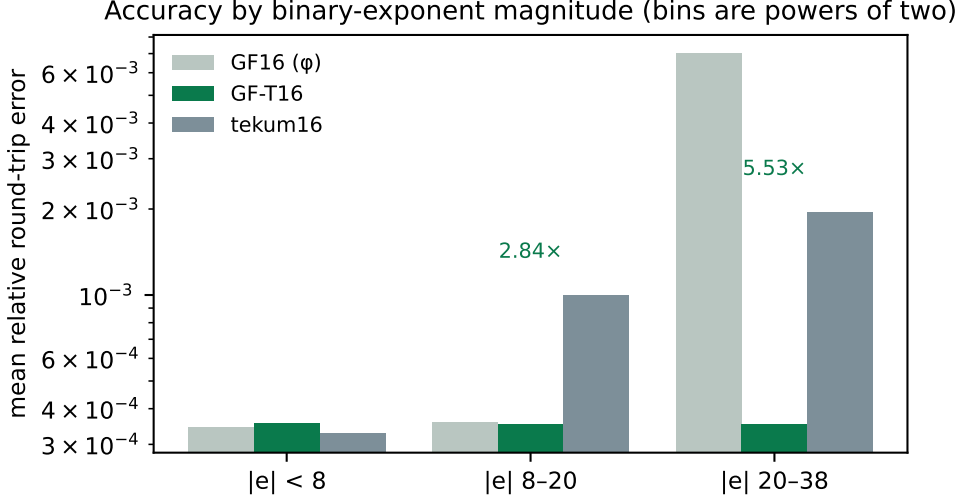


Figure 1: Accuracy by binary-exponent magnitude. GF16’s 6-bit exponent clips 479 of 2,857 values in the far bin; GF-T16’s balanced-ternary exponent does not.

2 Accuracy

Mean relative error over an encode–decode round trip, 6,000 values spanning $2^{-38} \dots 2^{38}$ with random sign, binned by binary-exponent magnitude $|e|$. Table 1 and Figure 1.

On the axis. The bins are powers of two. Read as *decades* the far column is not a win at all: GF-T16’s exponent reaches ± 40 in powers of two, roughly ± 12 decades, so beyond that it overflows while an unbounded regime keeps working — measured, 1,458 of the far-bin values clip under that reading. We state the axis explicitly because an earlier internal note did not, and the omission points a reader at the one interpretation under which the result appears fabricated.

3 Hardware

Synthesis with Yosys 0.65 [6], place and route with nextpnr-xilinx (1743d0f) [7] on a Xilinx XC7A200T, hard multipliers disabled so the figures describe fabric alone. Bitstream generation uses Project X-Ray. No vendor tool is involved at any step, which is what makes the numbers checkable by a reader without a licence.

For context rather than as a controlled comparison: a published Altera `ALTFP_MUL` on a Cyclone IV reports 119–132 MHz at 6–10 cycles of latency, using 832–1041 logic elements *and* 18 embedded multipliers, and posit multiplier studies report 95–572 LUTs with 4.28–15.55 ns of logic delay. Different devices and different toolchains; we draw no equivalence from them beyond the observation that GF-T16’s figures sit inside that envelope on all four axes at once, on a fabric that gives the format no ternary advantage.

Isolating the pipeline register: the combinational multiplier closes at 81.35 MHz, the two-stage version at 147.32 MHz. The cut is between the significand product and the renormalisation

Table 2: GF-T multiplier, post-route, one harness across the whole lineup so the rows are comparable. Latency one cycle, throughput one result per cycle.

rung	LUTs	DSP48	$F_{\max}$
GF-T4	12	0	161.11 MHz
GF-T8	50	0	153.23 MHz
GF-T16	212	0	131.73 MHz
GF-T32	1,477	0	83.27 MHz

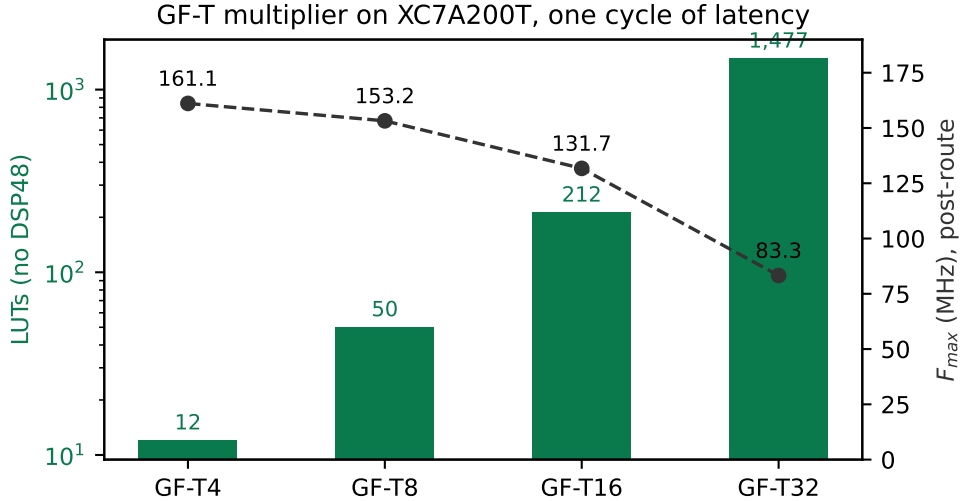


Figure 2: Area and achieved frequency across the ladder.

— a 10×10 multiply, then a carry test, a saturating exponent add and a bit select.

4 Two width defects, and why they generalise

4.1 Interface width dominated the arithmetic

Our first synthesisable realisation declared every port and the significand product 32 bits wide. Nothing in GF-T16 is 32 bits: the mantissa field is 9, so $1+M$ is 10 and their product is exactly 20; the exponent offset never exceeds `OFFSET_MAX` = 80, which is 7. Synthesis built a 32×32 multiplier and a 32-bit comparison tree and charged for it (Figure 3): 1,179 LUTs, or three DSP48 blocks, against 219 LUTs and none once the buses match the values they carry. The arithmetic is unchanged.

4.2 The same width decided correctness

At GF-T32 the significand product needs 52 bits. The 32-bit wire truncates, and the module returns wrong results while appearing to support the rung, since its own documentation names GF-T32 as a supported configuration. Measured against a 64-bit reference: 1,995,730 mismatches in 2,128,964 combinations.

Deriving every width from the format parameters removes both problems at once. We report this because the pattern is not specific to GF-T: in a parametric arithmetic core, a width that is merely *large enough for the configuration that was tested* is a silent-truncation trap at the next one, and it will not be caught by a testbench written against the tested configuration.

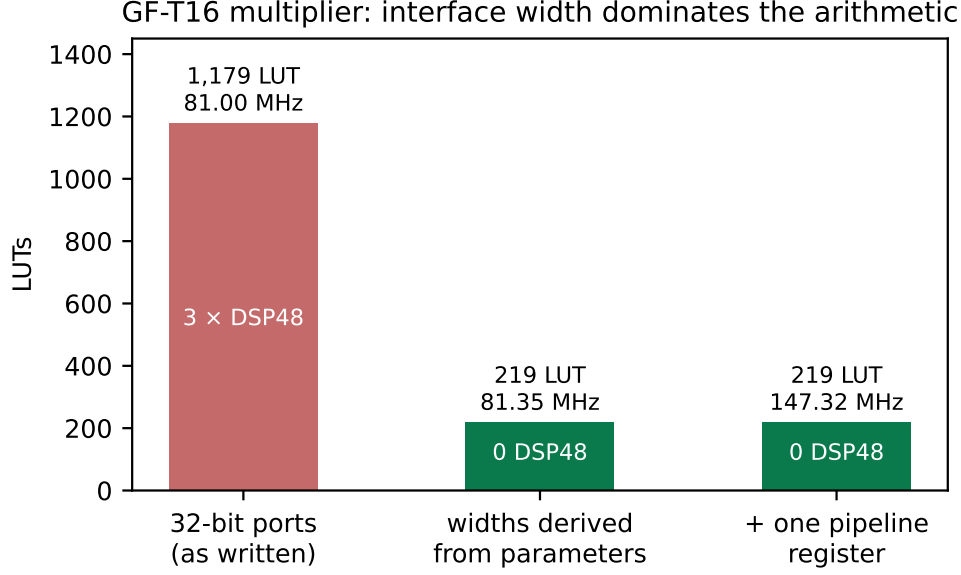


Figure 3: The same arithmetic at three interface widths.

Table 3: Equivalence evidence. The reference for each rung is the module already trusted for that rung.

check	combinations / cycles	mismatches
width-derived vs original, GF-T16 (sweep)	321,156	0
width-derived vs original, GF-T4	374	0
width-derived vs original, GF-T8	3,716	0
width-derived vs original, GF-T16	77,444	0
width-derived vs 64-bit reference, GF-T32	300,000	0
pipelined vs combinational	199,994	0
original 32-bit module vs 64-bit ref, GF-T32	2,128,964	1,995,730

5 Equivalence

Every change above is a claim that timing or width changed and arithmetic did not. Each was checked rather than argued.

The GF-T16 sweep is exhaustive in the sense that matters here: the mantissa space is covered in full at offset pairs exercising underflow, mid-range and saturation, then the offsets are covered in full at mantissas that do and do not carry — every path through the carry, the saturation and the underflow clamp. The last row is the point of the section: the width-derived module agrees with the reference that is correct and disagrees with the one that truncates.

6 Limitations

1. **The accuracy comparison is against a structural model of tekum, not tekum itself.** tekum [2] is a descendant of takum [1] adapted for balanced ternary. Our oracle reconstructs it from takum’s field scheme; the full per-trit specification requires the tekum paper. The ratios are as good as that model.
2. **No head-to-head in hardware.** takum’s codec RTL is public and written in VHDL [3]. We did not synthesise it alongside GF-T, so the cost figures are GF-T’s own. What is visible

in that source, and which we report as structure rather than measurement: the 16-bit codec instantiates a 725-line generated leading-zero-counter and barrel shifter — the regime decode a fixed-field format does not have.

3. **The range is bounded** at ± 40 in powers of two, roughly ± 12 decades, where a regime field is unbounded. Fixed fields buy the cheap datapath and the uniform mantissa; range is the price, and workloads that need more should raise the trit budget or use a tapered format.
4. **One device family.** Artix-7 on an open flow. Not multi-corner characterisation; an ASIC mapping will differ.
5. **The ternary-fabric argument is architectural.** No ternary process exists to synthesise on. Section 3 is a binary-fabric result; the ternary claim is reasoning about regime decode and native exponent addition and should be read as such.

Reproducibility

The reference oracle, the RTL, the equivalence testbenches and the synthesis commands are public. The toolchain is Yosys 0.65, nextpnr-xilinx 1743d0f, Icarus Verilog 13.0 and Python 3.14 — all open-source, none requiring a licence, which is the point: a result nobody can reproduce without buying something is not a public result.

Disclosure

An AI coding assistant was used in preparing the software, the measurements’ tooling and this manuscript. Every figure reported here was produced by running the named tools on hardware in the author’s possession; no measurement in this paper is estimated, and where a figure is derived rather than observed it is labelled.

References

- [1] L. Hunhold. Takum arithmetic. arXiv:2404.18603.
- [2] L. Hunhold. Tekum: balanced-ternary tapered-precision arithmetic. arXiv:2512.10964.
- [3] L. Hunhold. Design and implementation of a takum arithmetic hardware codec in VHDL. arXiv:2408.10594. Source: <https://github.com/takum-arithmetic/Takum-Codec-RTL>.
- [4] D. Vasilev. GoldenFloat: φ -structured floating-point arithmetic. arXiv:2606.05017.
- [5] D. Vasilev. A bit-exact conformance catalogue for 83 numeric formats. arXiv:2606.09686.
- [6] C. Wolf. Yosys open synthesis suite. <https://yosyshq.net/yosys/>.
- [7] D. Shah et al. nextpnr: a portable FPGA place-and-route tool. <https://github.com/YosysHQ/nextpnr>; Xilinx target via Project X-Ray.