

brain-drain brain: CM5, two USB 3 hubs, eight bay slots, M.2 bay, power, UI

power-input

12 V DIN input, fuse, TVS, reverse-polarity FET, bulk capacitance (sized for 8 bays)

File: sheets/power-input.kicad_sch

power-bucks

5V_SYS and 5V_HDD (TPS56637), +3V3 and 3V3_M2 (AP63203), +1V2 LDO

File: sheets/power-bucks.kicad_sch

cm5

Compute Module 5 (wireless): power, control, GPIO, microSD, USB-C, UART, RTC cell, fan, DIP, LEDs, OLED

File: sheets/cm5.kicad_sch

usb3-hub-B

USB5744 hub B on CM5 USB3-1, bay slots 5-8

File: sheets/usb3-hub-B.kicad_sch

bay-slots

Eight bay slots (PCIe x1 sockets, bay-card pinout): USB 3, USB 2, 12 V, 5 V, BAY_EN, bay LEDs

File: sheets/bay-slots.kicad_sch


m2-nvme

Bay 9: M.2 M-key on PCIe Gen3 x1, 3V3_M2 buck + load switch, lid switch

File: sheets/m2-nvme.kicad_sch

brain-drain			
Sheet: /			
File: brain-drain.kicad_sch			
Title: brain-drain brain: CM5, two USB 3 hubs, eight bay slots, M.2 bay, power, UI			
Size: A3	Date:		Rev: v0-generated
KiCad E.D.A. 9.0.8	Id: 1/8		

power-input: 12 V DIN input, fuse, TVS, reverse-polarity FET, bulk capacitance (sized for 8 bays)

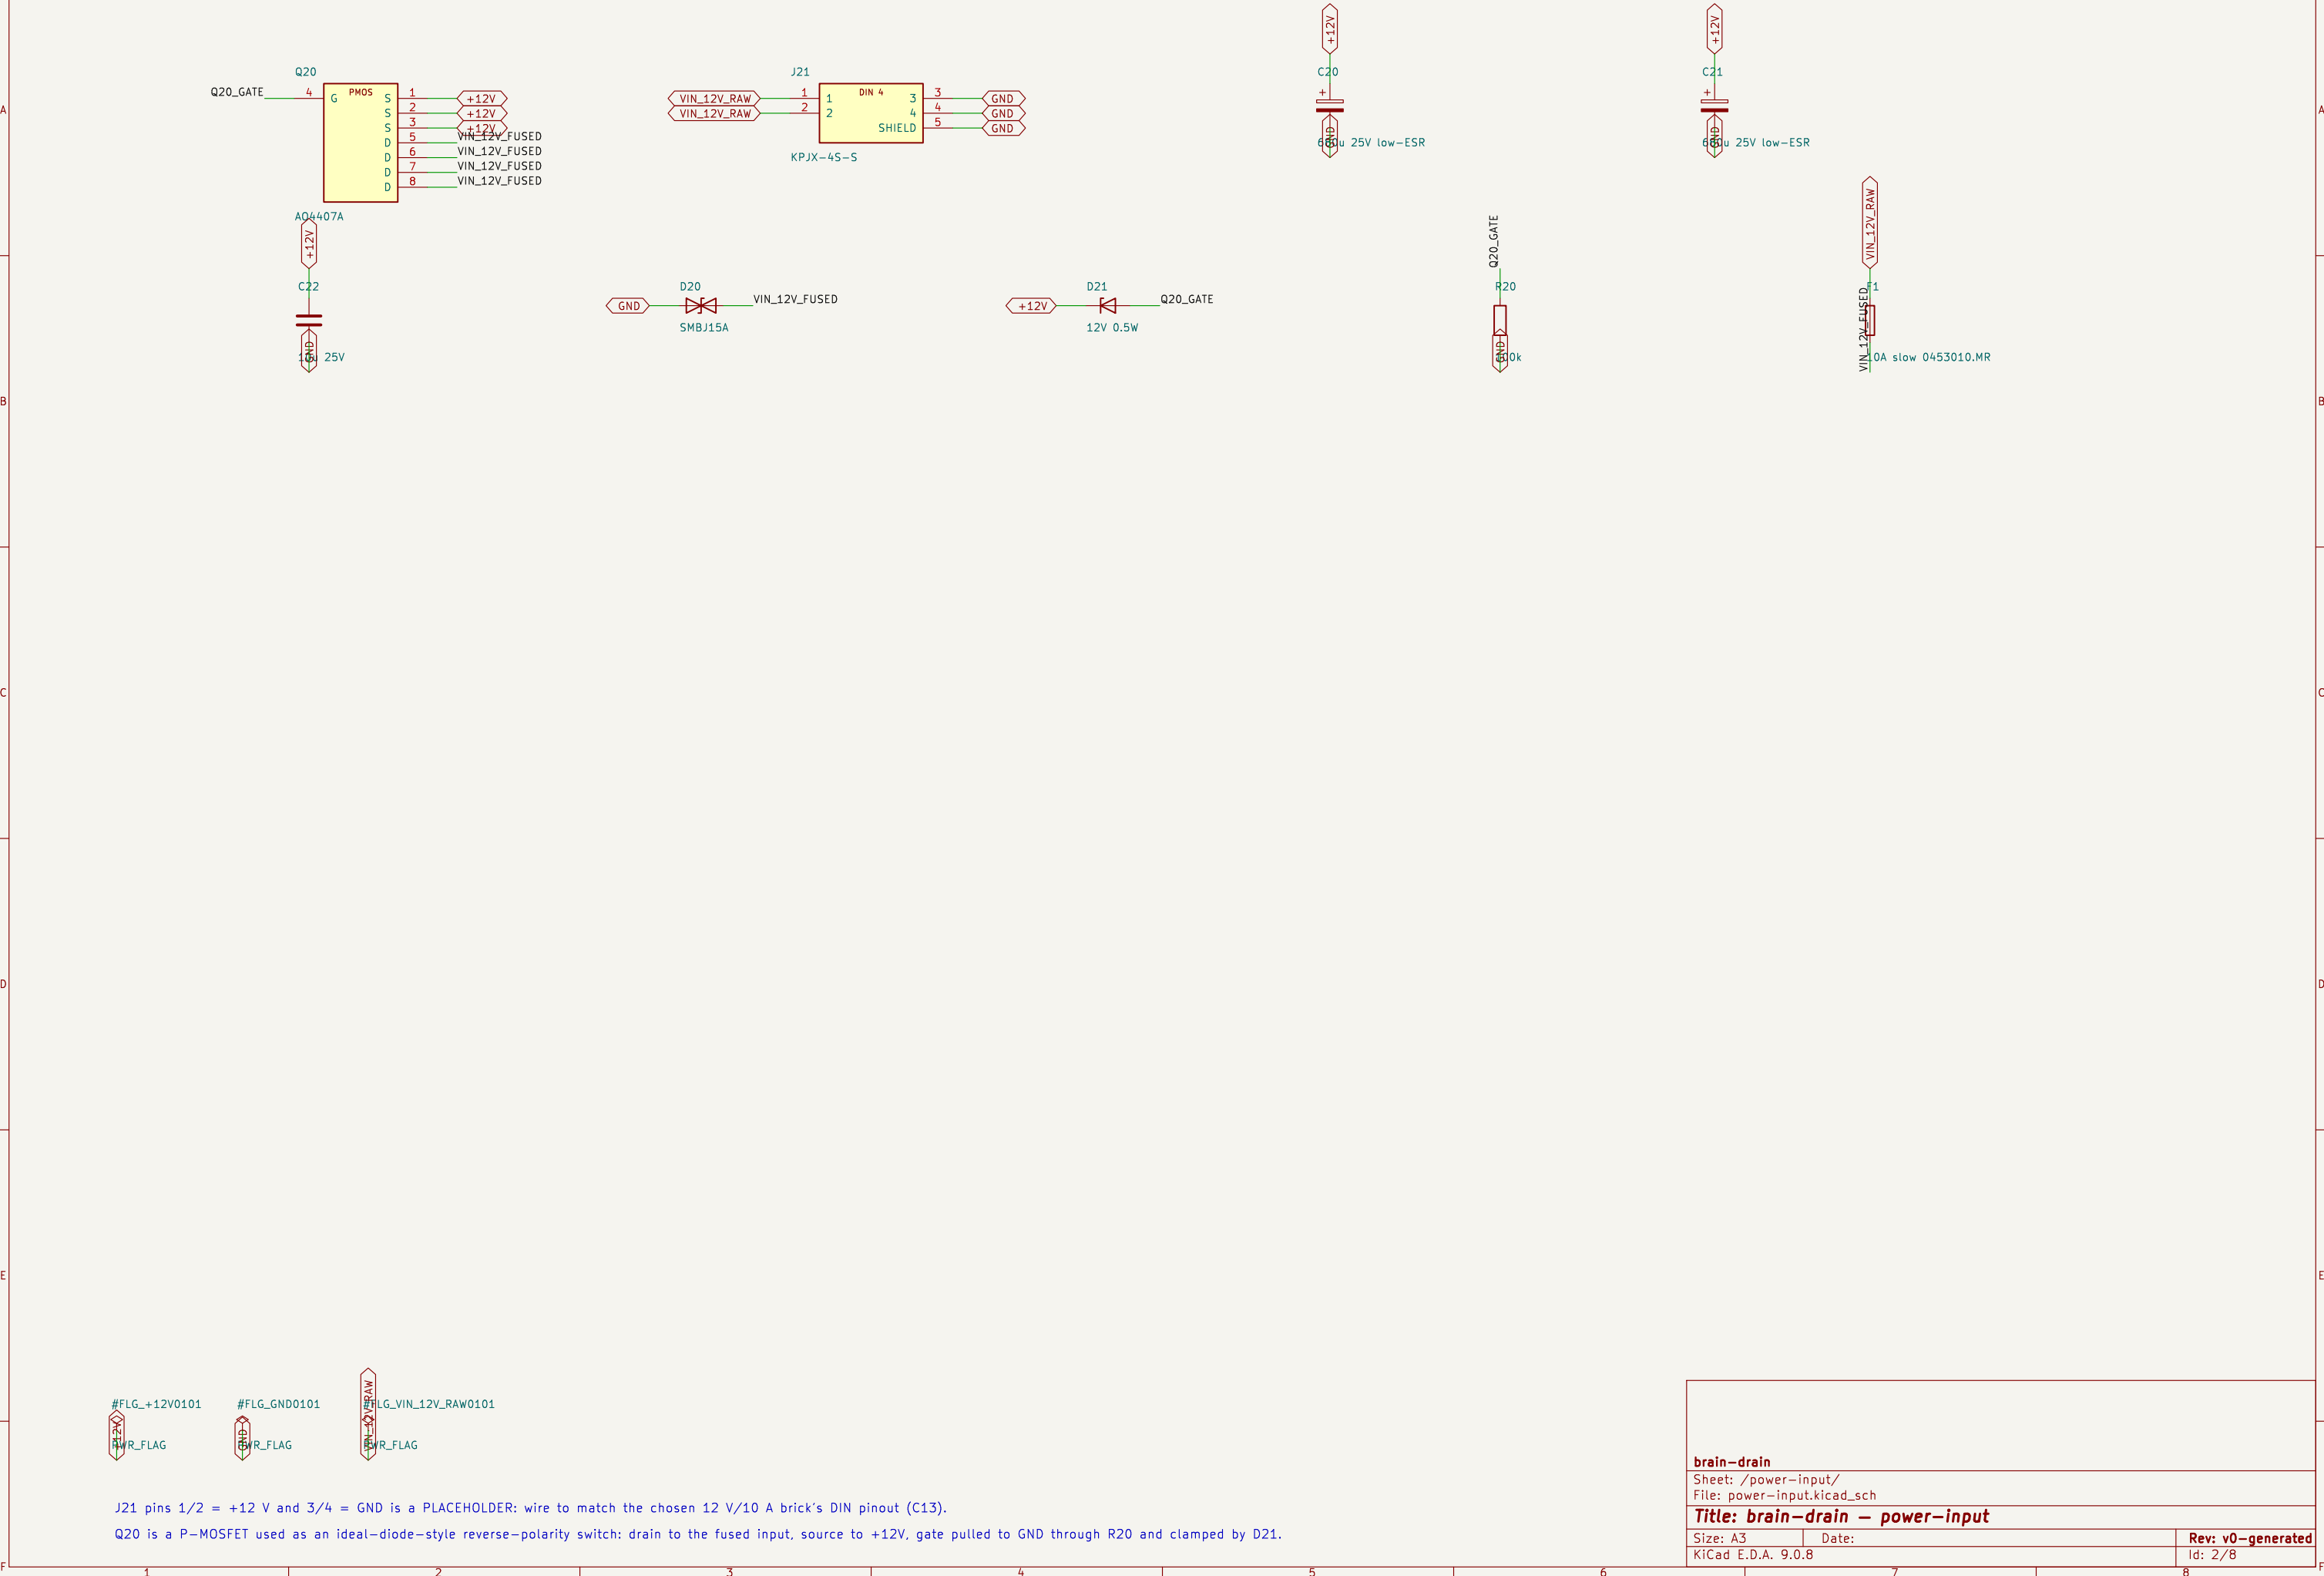

J21 pins 1/2 = +12 V and 3/4 = GND is a PLACEHOLDER; wire to match the chosen 12 V/10 A brick's DIN pinout (C13).
Q20 is a P-MOSFET used as an ideal-diode-style reverse-polarity switch; drain to the fused input, source to +12V, gate pulled to GND through R20 and clamped by D21.

brain-drain

Sheet: /power-input/
File: power-input.kicad_sch

Title: brain-drain - power-input

Size: A3



Date:

Rev: v0-generated

KiCad E.D.A. 9.0.8

Id: 2/8

power-bucks: 5V_SYS and 5V_HDD (TPS56637), +3V3 and 3V3_M2 (AP63203), +1V2 LDO

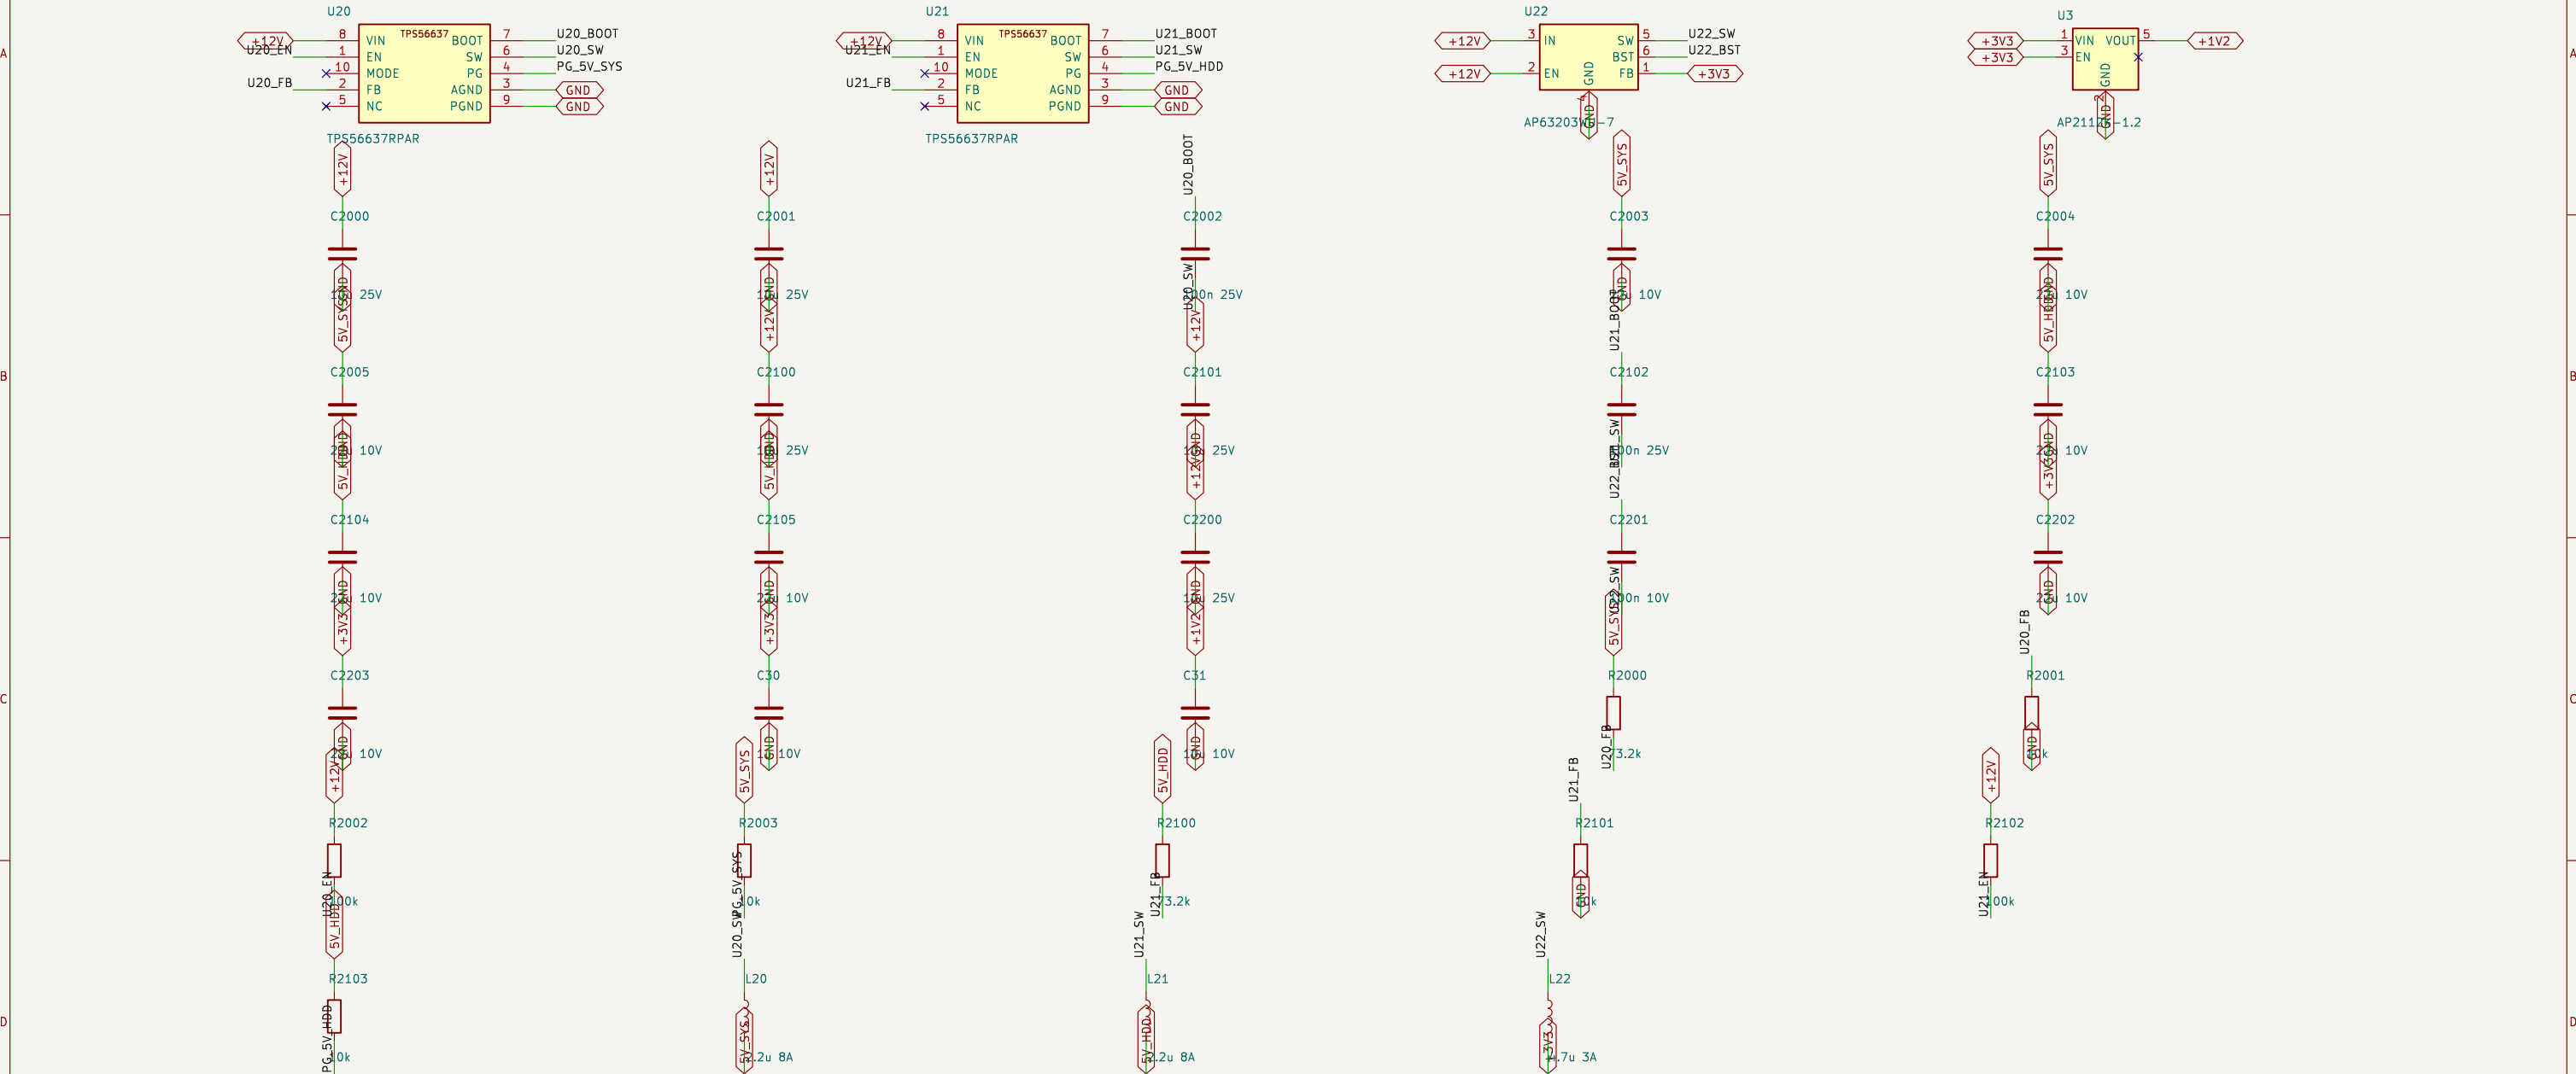

TPS56637 FB: Vref 0.6 V; 73.2k/10k gives 4.99 V. MODE floating = forced CCM (quietest for the CM5 rail).
AP63203WU is the fixed 3.3 V variant: FB ties straight to the output. EN tied to VIN (always on).

brain-drain

Sheet: /power-bucks/
File: power-bucks.kicad_sch

Title: brain-drain – power-bucks

Size: A3


Date:

Rev: v0-generated


KiCad E.D.A. 9.0.8

Id: 3/8


cm5: Compute Module 5 (wireless): power, control, GPIO, microSD, USB-C, UART, RTC cell, fan, DIP, LEDs, OLED

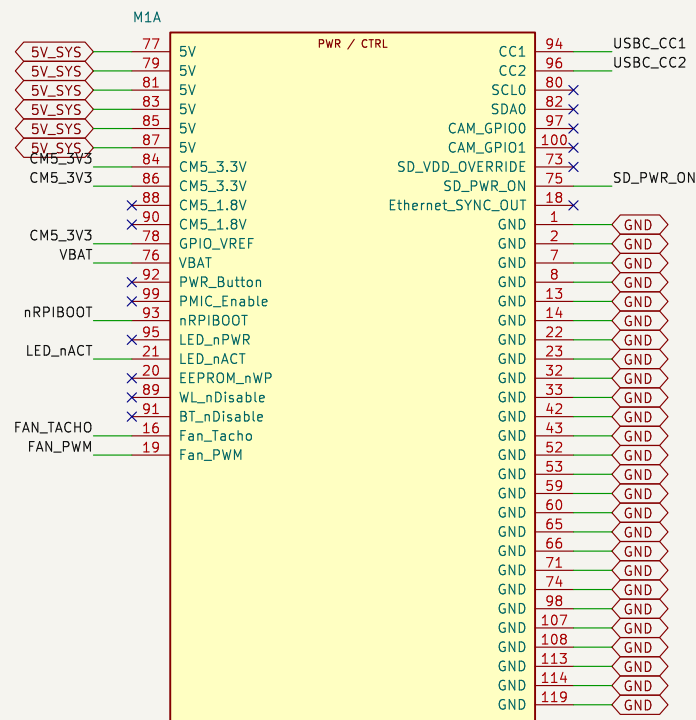


CM5002016

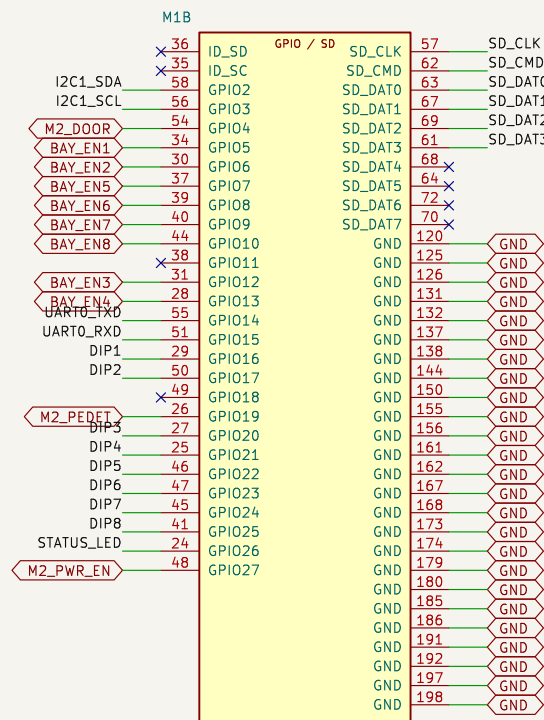


CM5002016

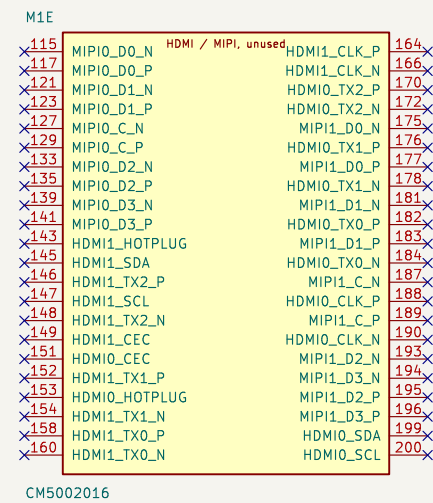



CM5002016

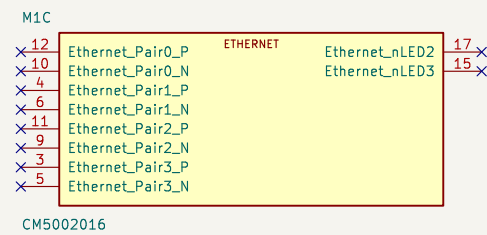


CM5002016

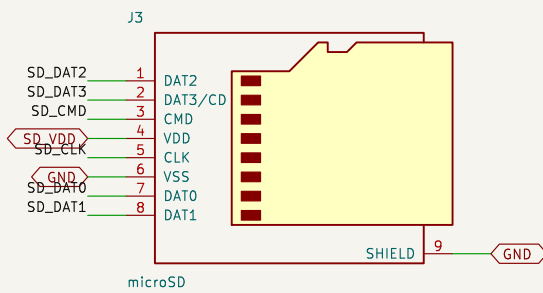


microSD

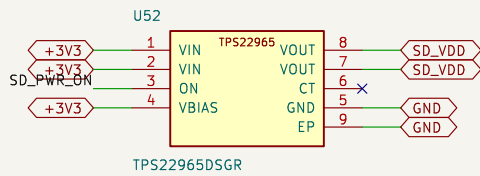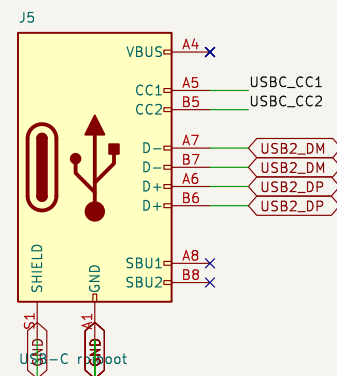


TPS22965DSGR

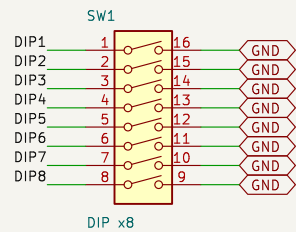


DIP x8

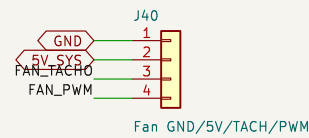


Fan GND/5V/TACH/PWM

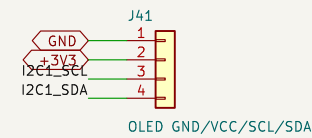


OLED GND/VCC/SCL/SDA

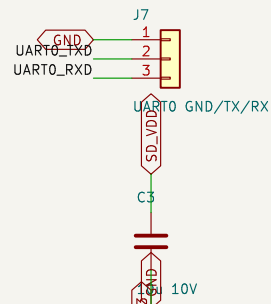


UART0 GND/TX/RX

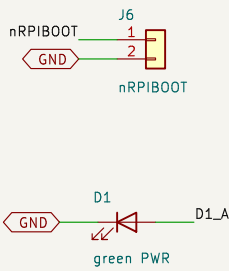


nRPIBOOT



LED_nACT



STATUS_LED

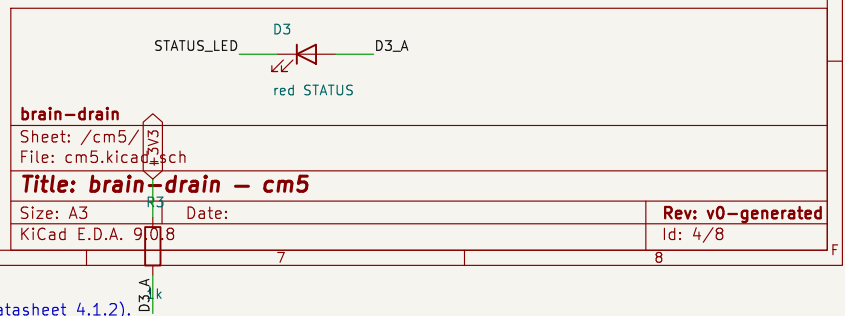

brain-drain			
Sheet: /cm5/			
File: cm5.kicad.sch			
Title: brain-drain - cm5			
Size: A3		Date:	
KiCad E.D.A. 9.0.8		Rev: v0-generated	
Id: 4/8			

GPIO_VREF is tied to the CM5's own 3.3 V output (pins 84/86) for 3.3 V GPIO signalling, per datasheet §4.2.

PMIC_Enable and PWR_Button are left floating (internal pull-ups). nRPIBOOT goes to jumper J6.


LED_nACT is an open-drain 20 mA output on the CM5; it sinks D2 directly. GPIO26 sinks D3 (software drives it low to light).

microSD power goes through U52 so the CM5 can power-cycle the card on reboot via SD_PWR_ON, matching the CM5IO reference (which uses an RT9742).

Ethernet dropped (C22). The CM5 wireless variant's PCB antenna is on the short module edge that carries MH1; that edge sits on the board's left edge with an 8 mm copper-free strip under it and no metal within 10 mm (CM5 datasheet 4.1.2).

USB-C is a design requirement (with a caveat). Across the CM5IO, CC1/CC2 connects to the CM5. It also connects the signal pull-up to itself. VBUS is not connected (the board is powered from 12 V). USB-OTG ID (status indicator).

```
usb3-hub-A: USB5744 hub A on CM5 USB3-0, bay slots 1-4
```

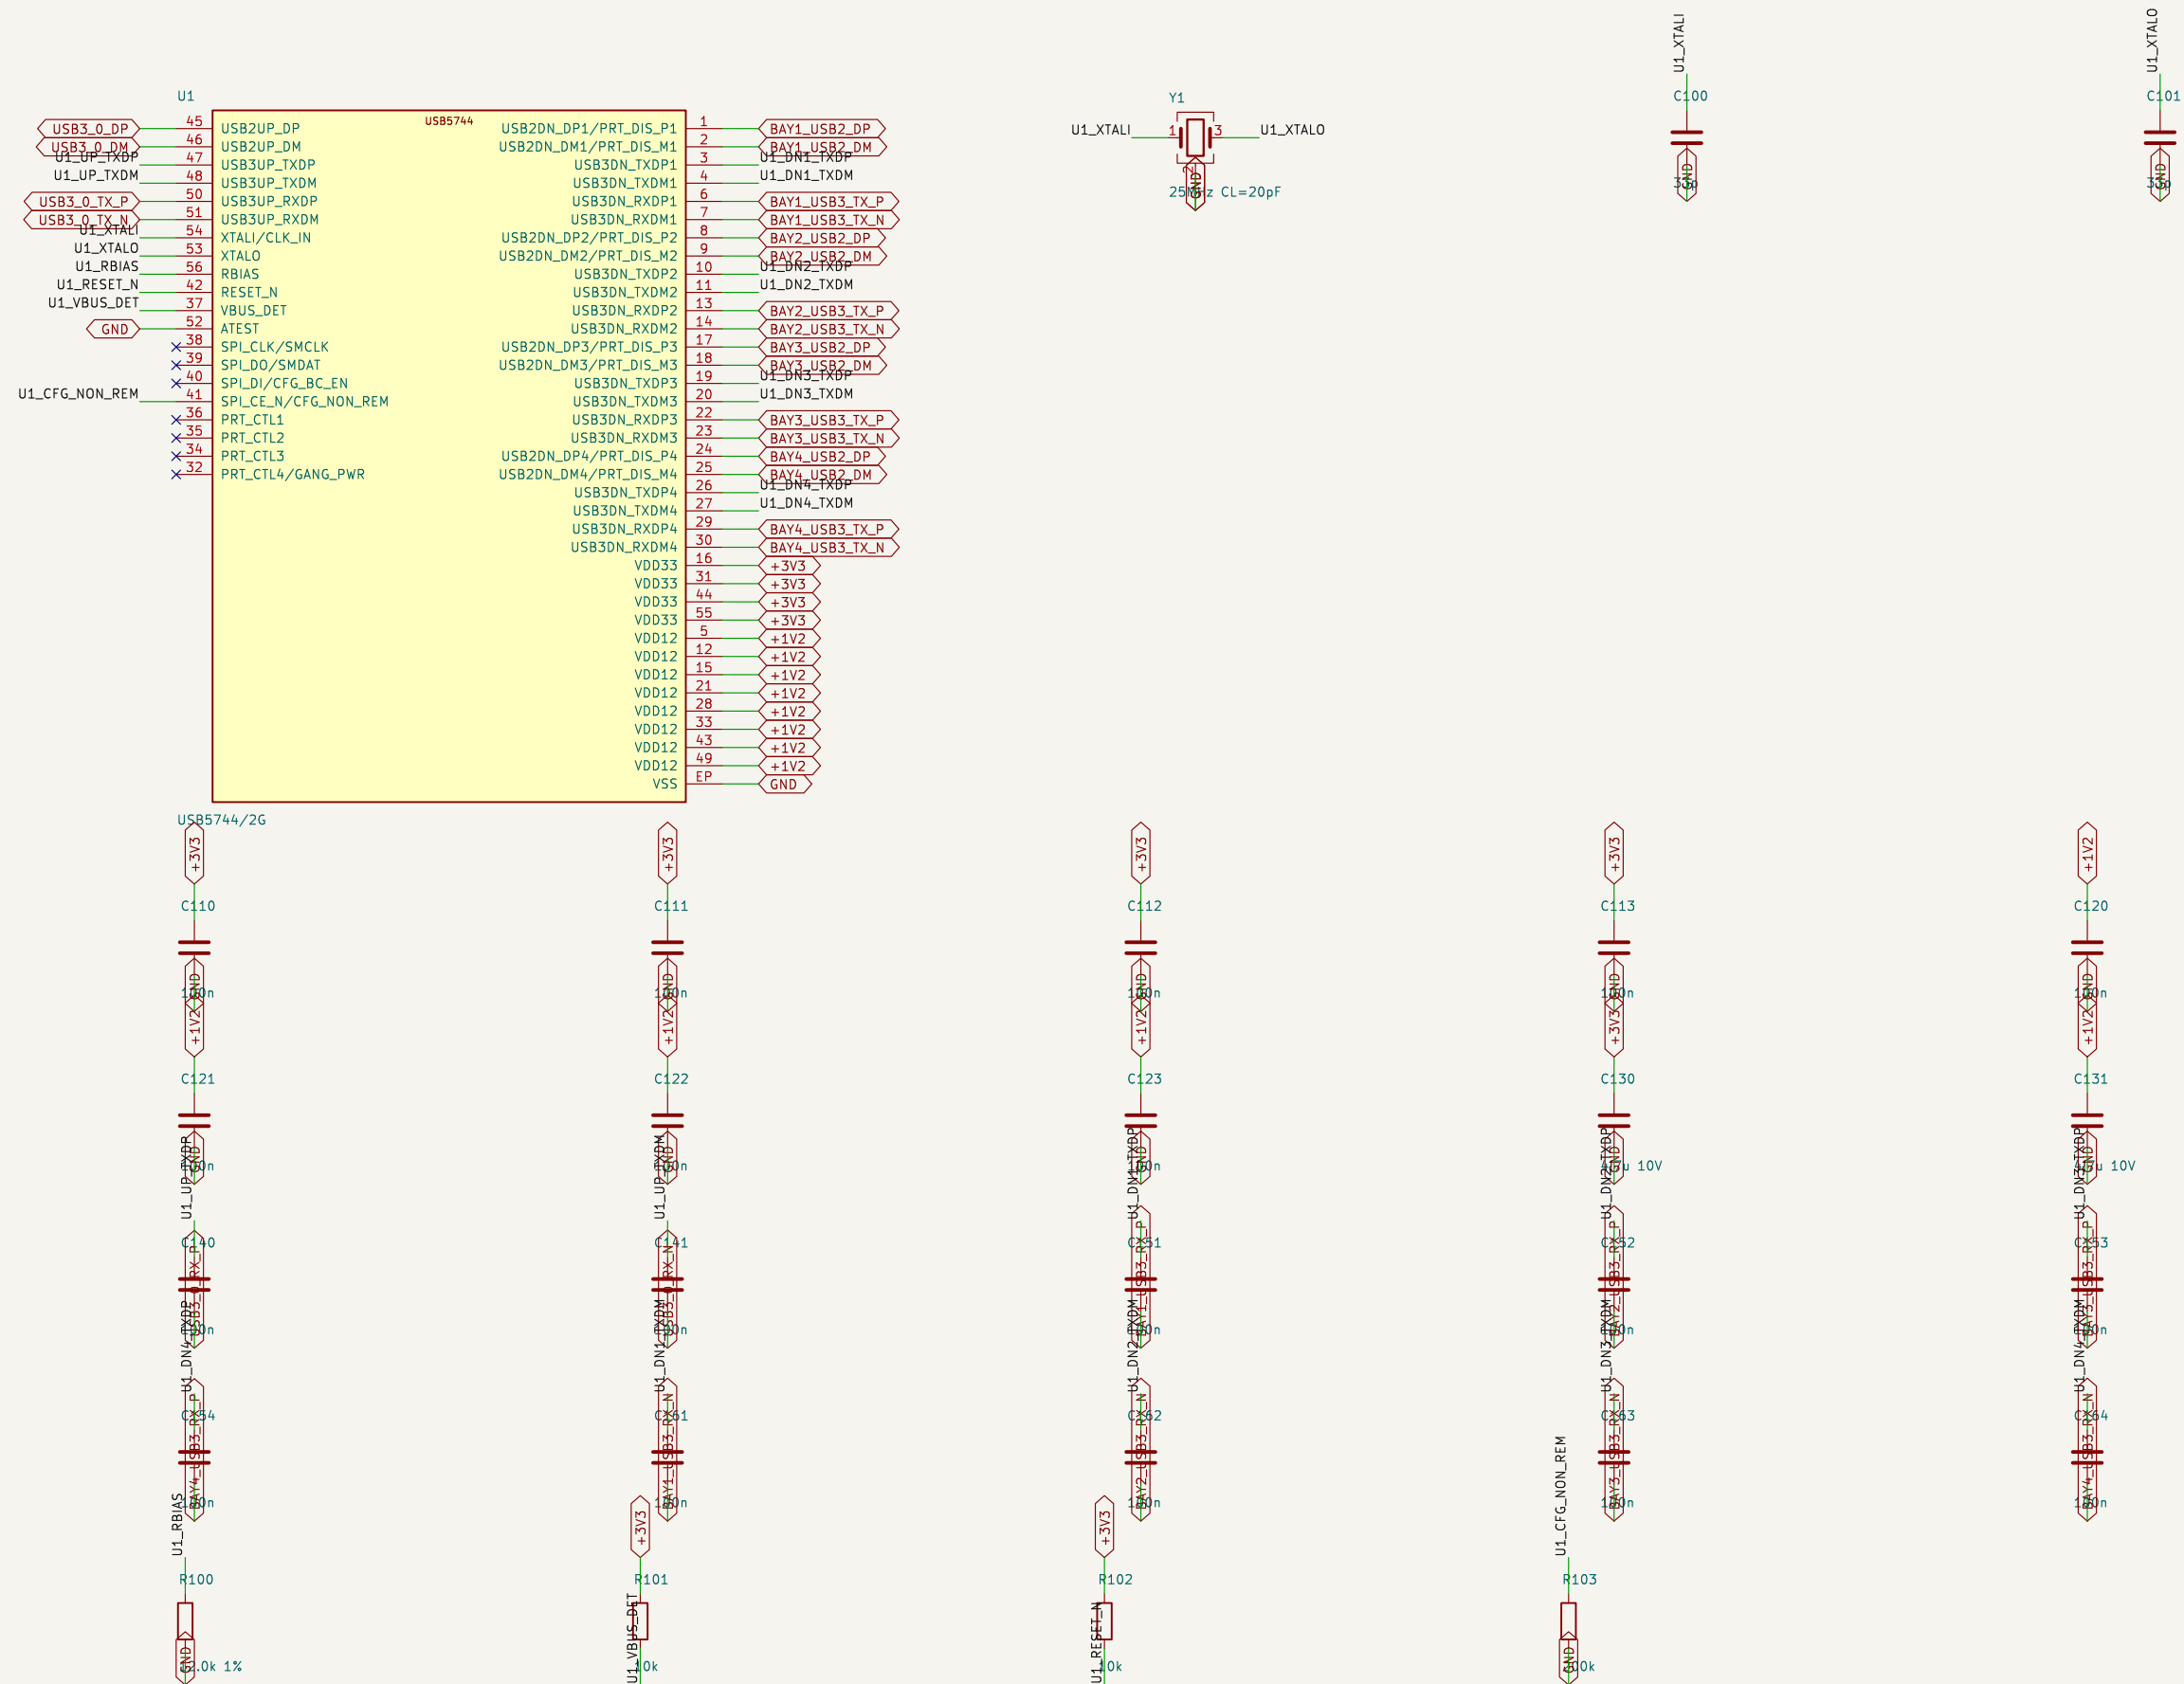


Hub A: upstream on CM5 USB3-0. Downstream ports 1-4 -> bay slots 1-4 (C24: eight slots, four cards populated in v1).




No SPI ROM and no SMBus pull-ups: the hub runs its internal ROM defaults. RESET_N has a pull-up only; add an RC if strap timing (1 ms hold) is a concern.

Crystal: 25 MHz, CL 20 pF per datasheet table 10-10; 33 pF load caps assume ~3 pF stray, adjust to the chosen crystal.

usb3-hub-B; USB5744 hub B on CM5 USB3-1, bay slots 5-8

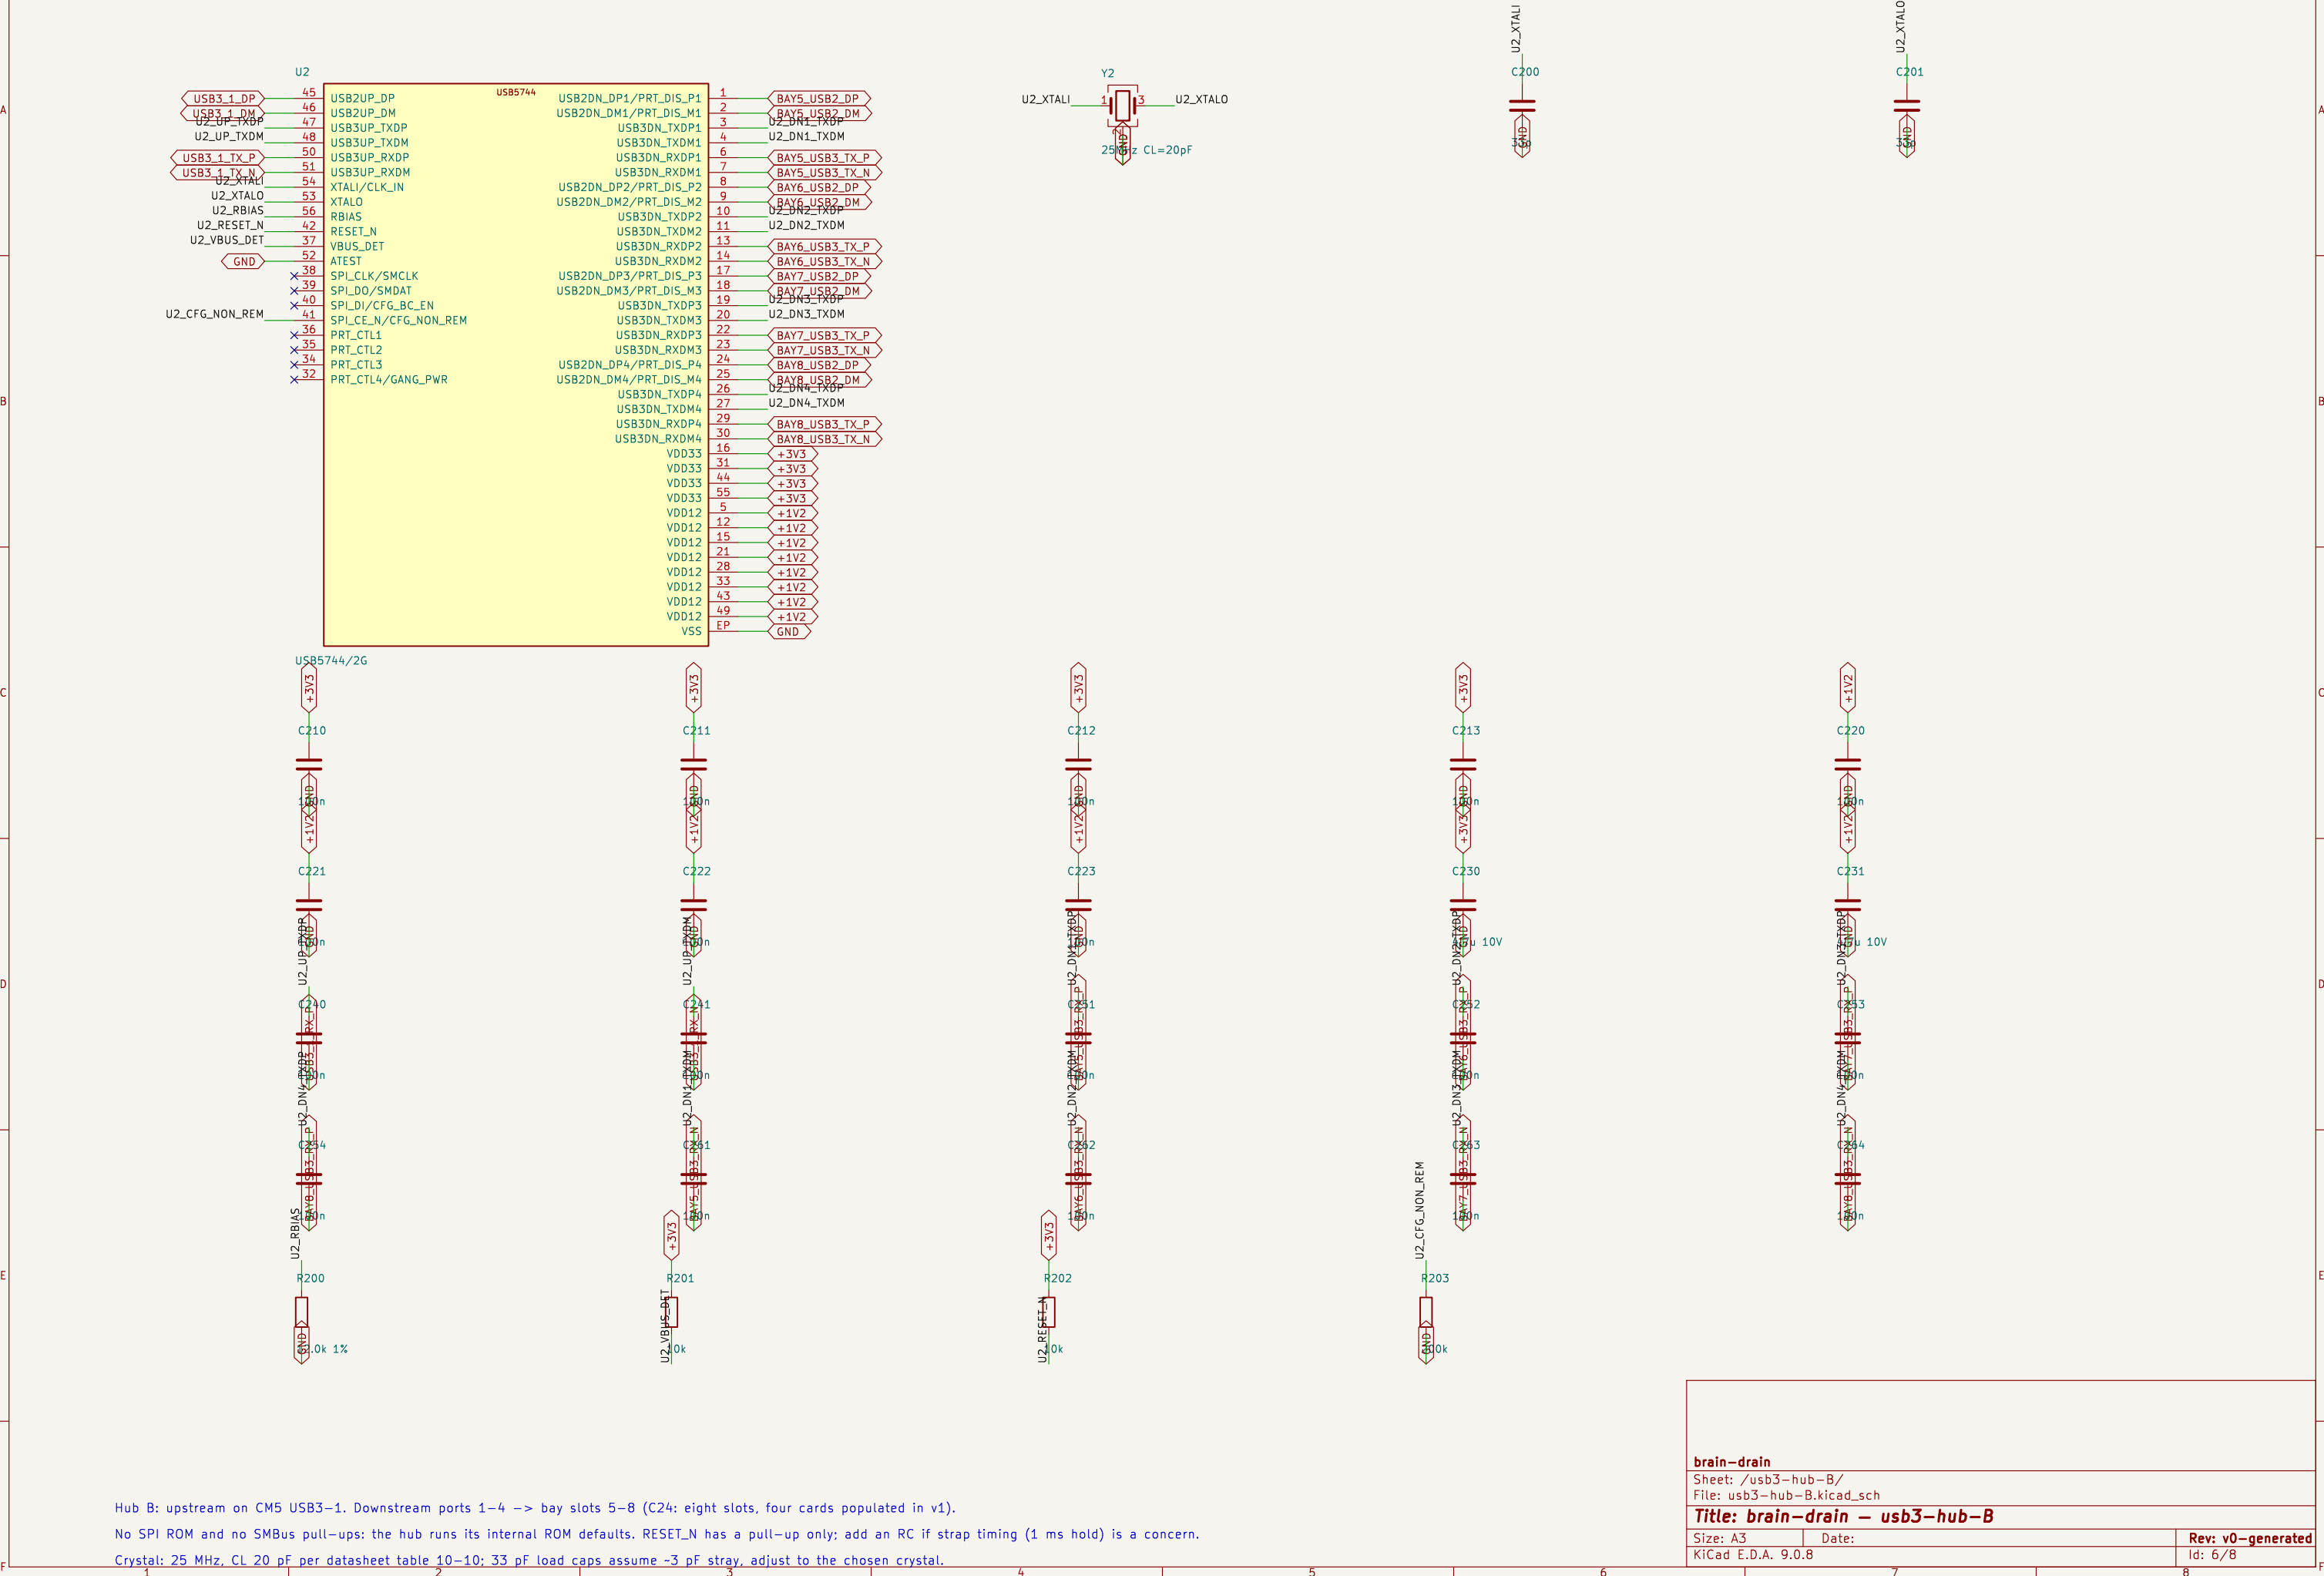


bay-slots: Eight bay slots (PCIe x1 sockets, bay-card pinout): USB 3, USB 2, 12 V, 5 V, BAY_EN, bay LEDs

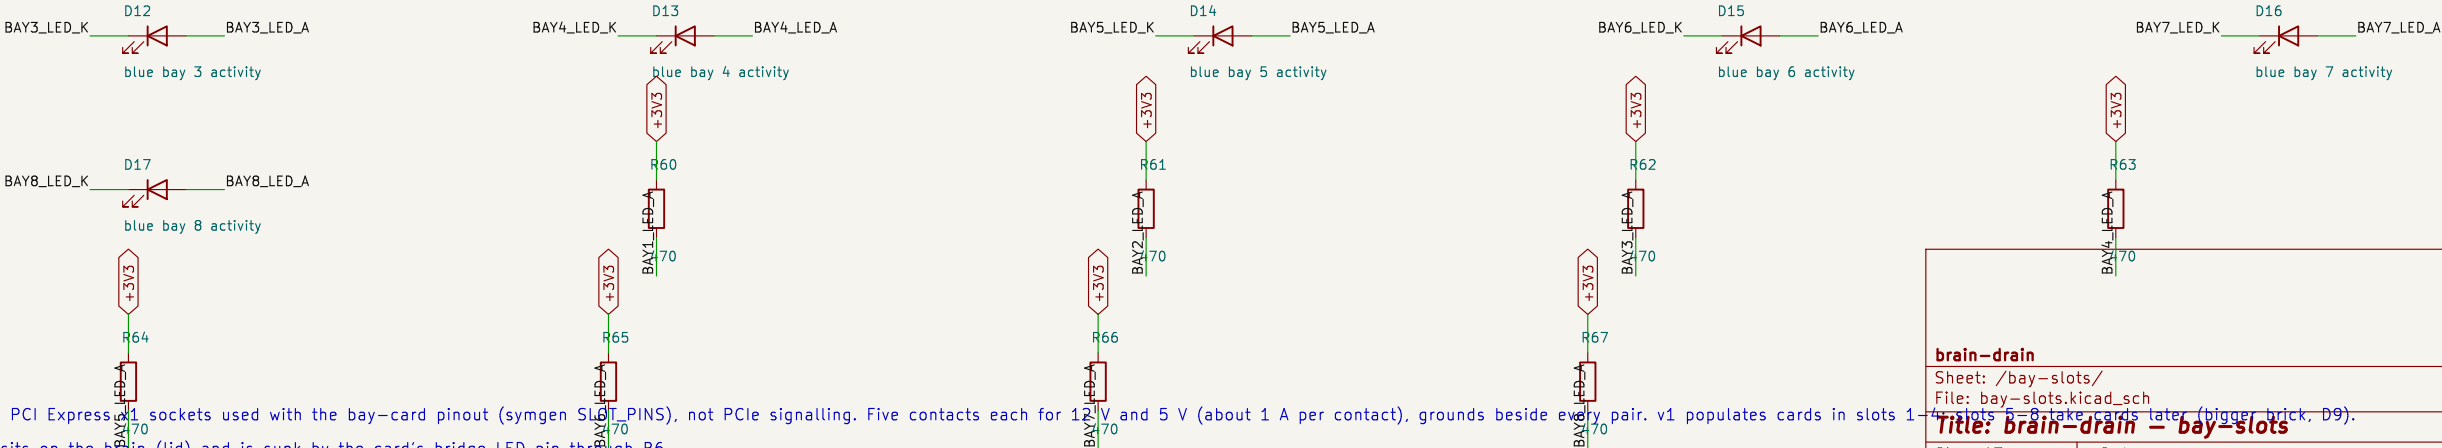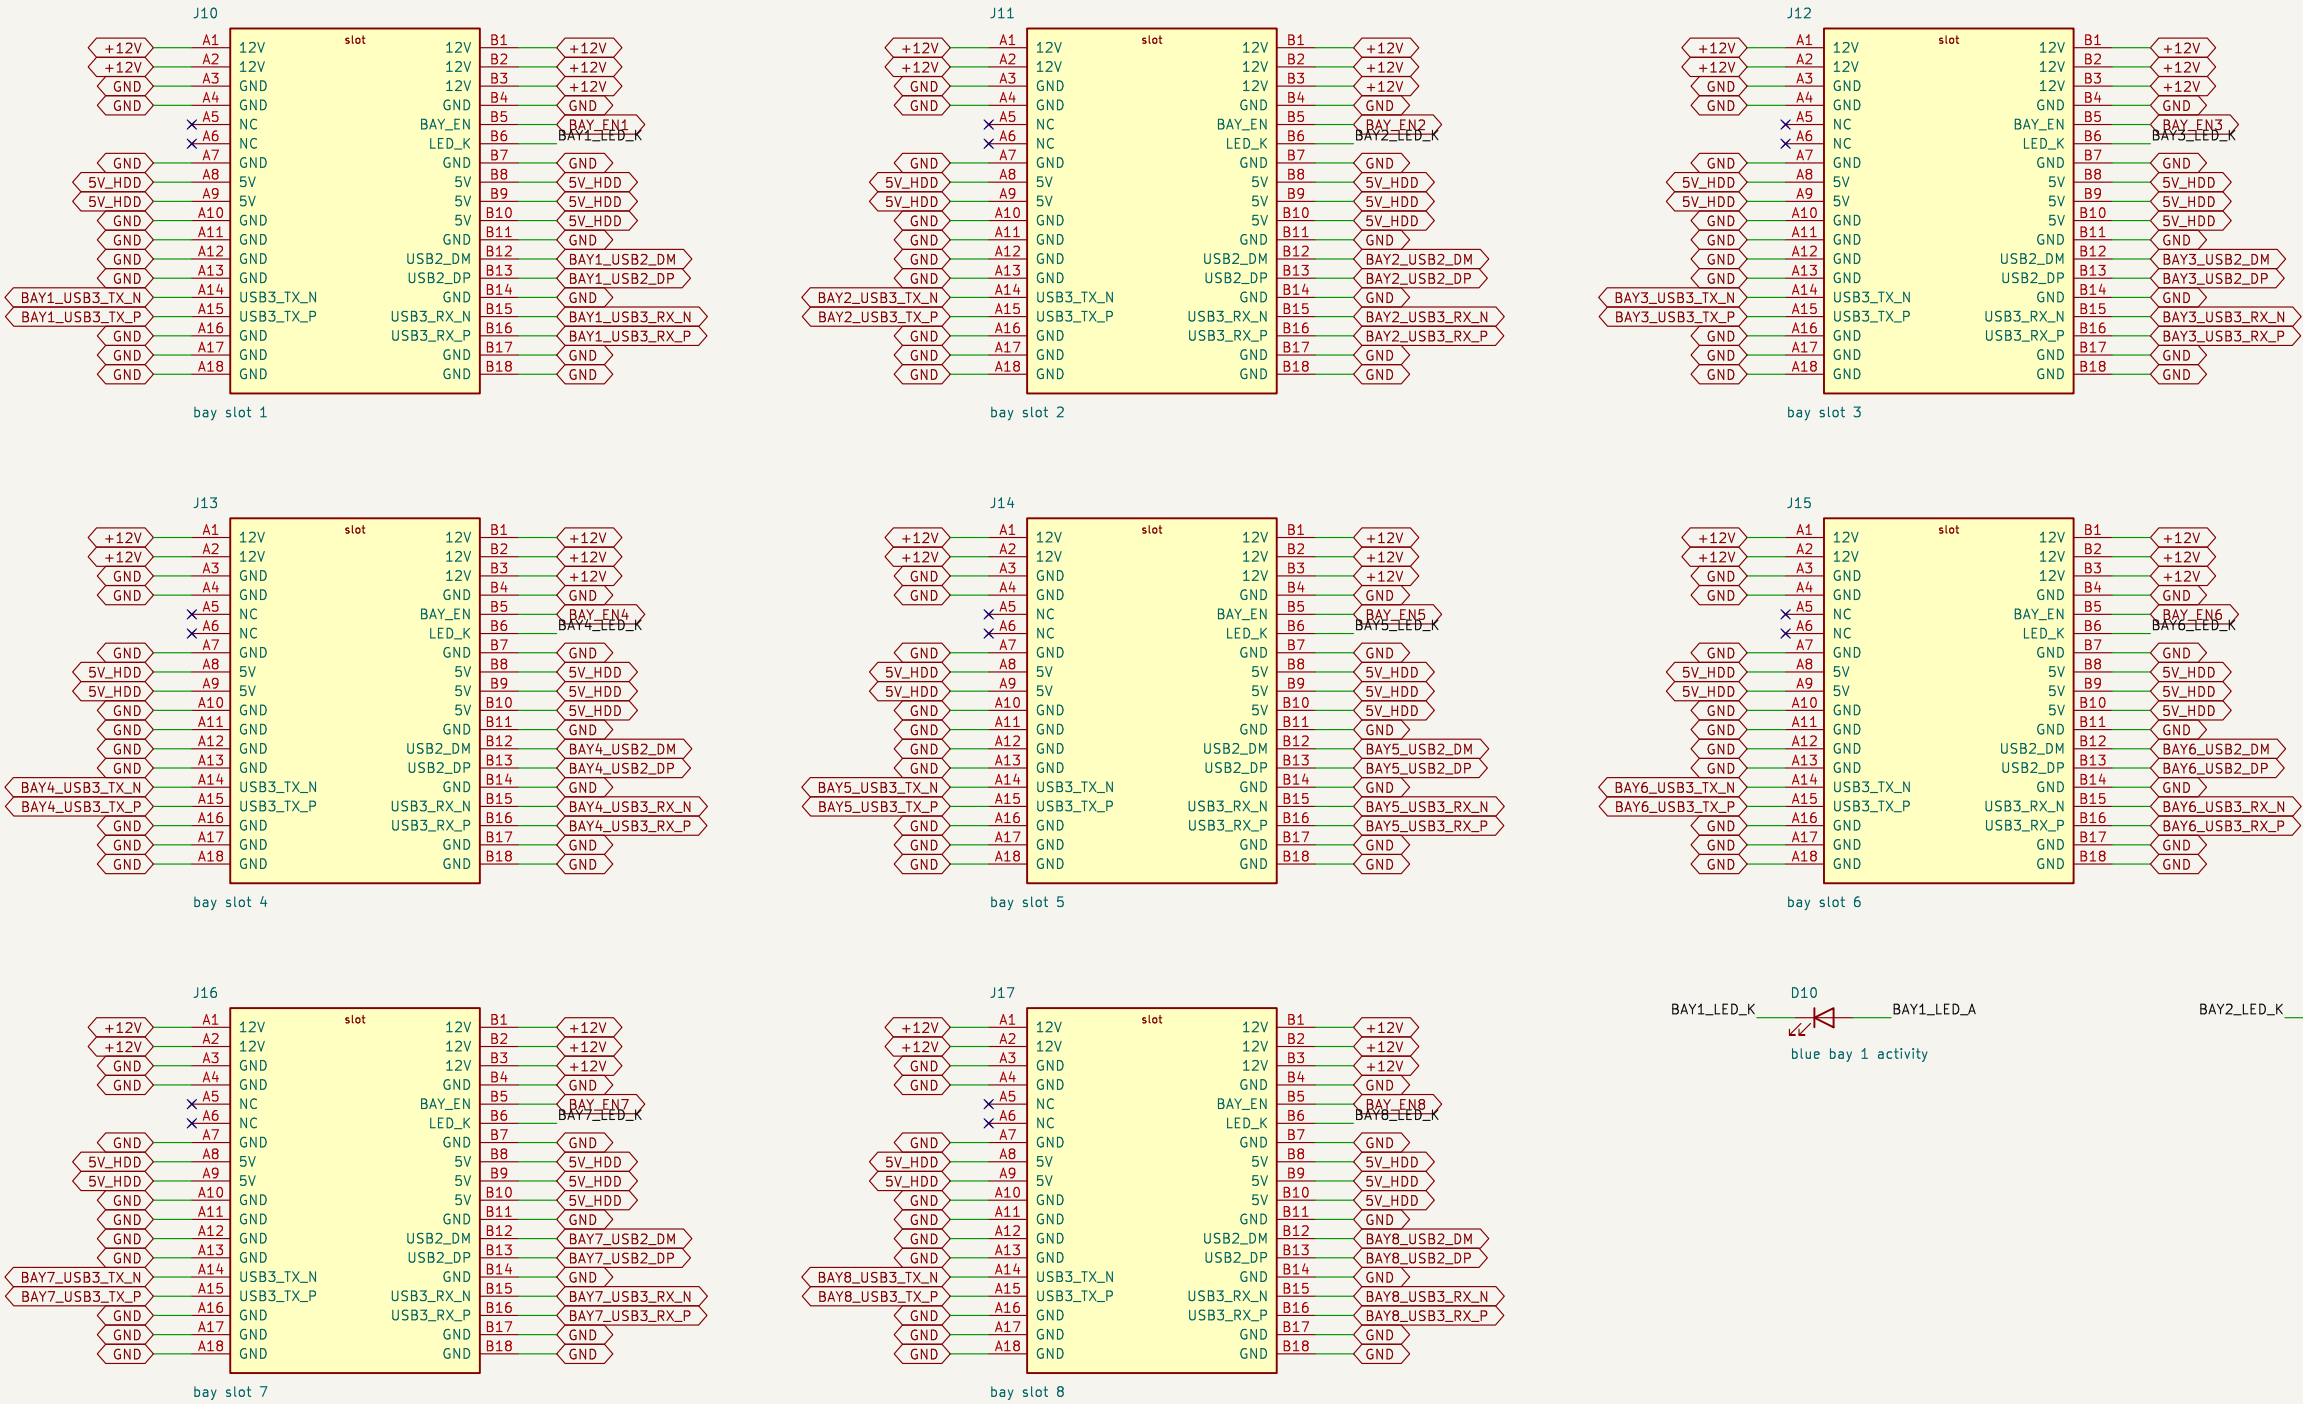

Bay slots are PCI Express x1 sockets used with the bay-card pinout (symgen SUGB_PINS), not PCIe signalling. Five contacts each for 12 V and 5 V (about 1 A per contact), grounds beside every pair. v1 populates cards in slots 1-4, slots 5-8 take cards later (bigger brick, D9).

The bay LED sits on the brain (lid) and is sunk by the card's bridge LED pin through B6.

m2-nvme: Bay 9: M.2 M-key on PCIe Gen3 x1, 3V3_M2 buck + load switch, lid switch

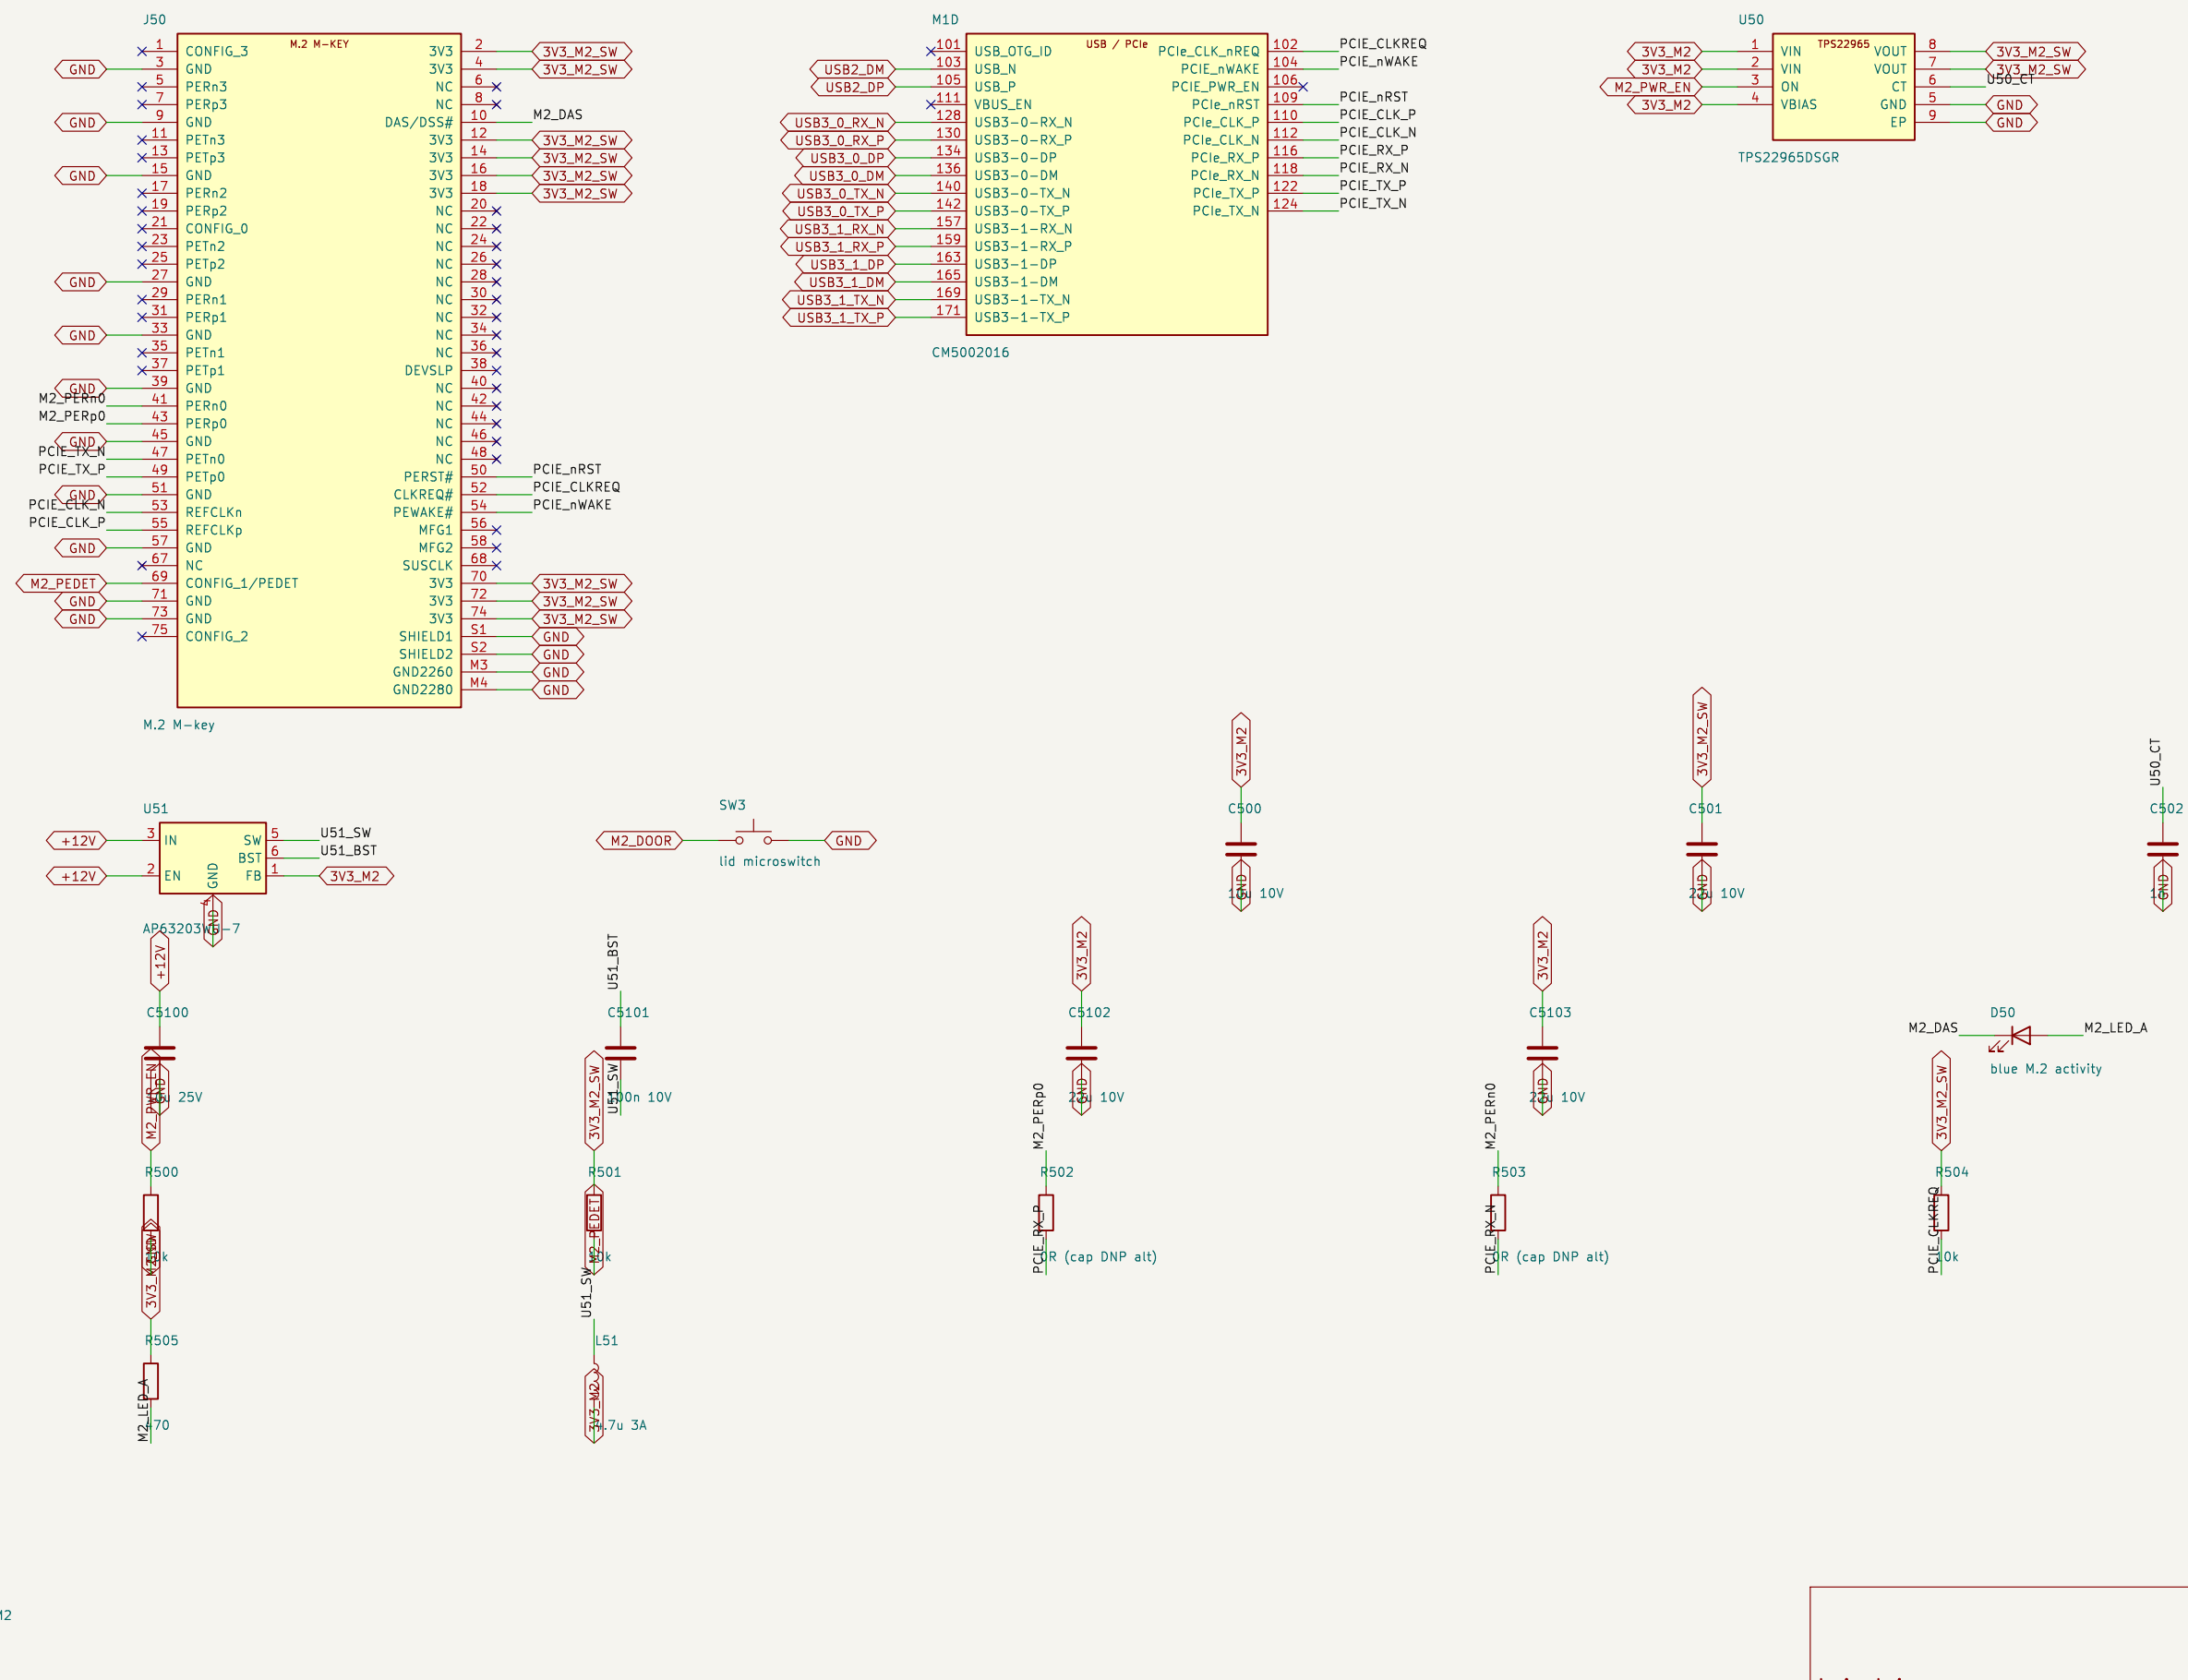

Polarity: CM5 TX_P -> PETp0 (49), TX_N -> PETn0 (47), PERp0 (43) -> RX_P, PERn0 (41) -> RX_N. The CM5IO reference wires both pairs inverted (TX_P to 47, RX_P to 41), which PCIe link training tolerates; either works.

Only PCIe lane 0 is wired (x1). PET = host transmit (CM5 TX, AC caps on the module). PER = host receive: per the M.2 spec the SSD carries its own TX caps, so R502/R503 are 0R; the same 0402 pads take 100n if a module without caps turns up.

PEDET (pin 69) is pulled up and read by GPIO19: an M.2 SATA module grounds it, and the software refuses the bay instead of trying PCIe.

Door switch SW3 to GPIO4 (software pull-up): closed = low = door shut. Software powers the slot (M2_PWR_EN, GPIO27 → U50) and rescans PCIe.