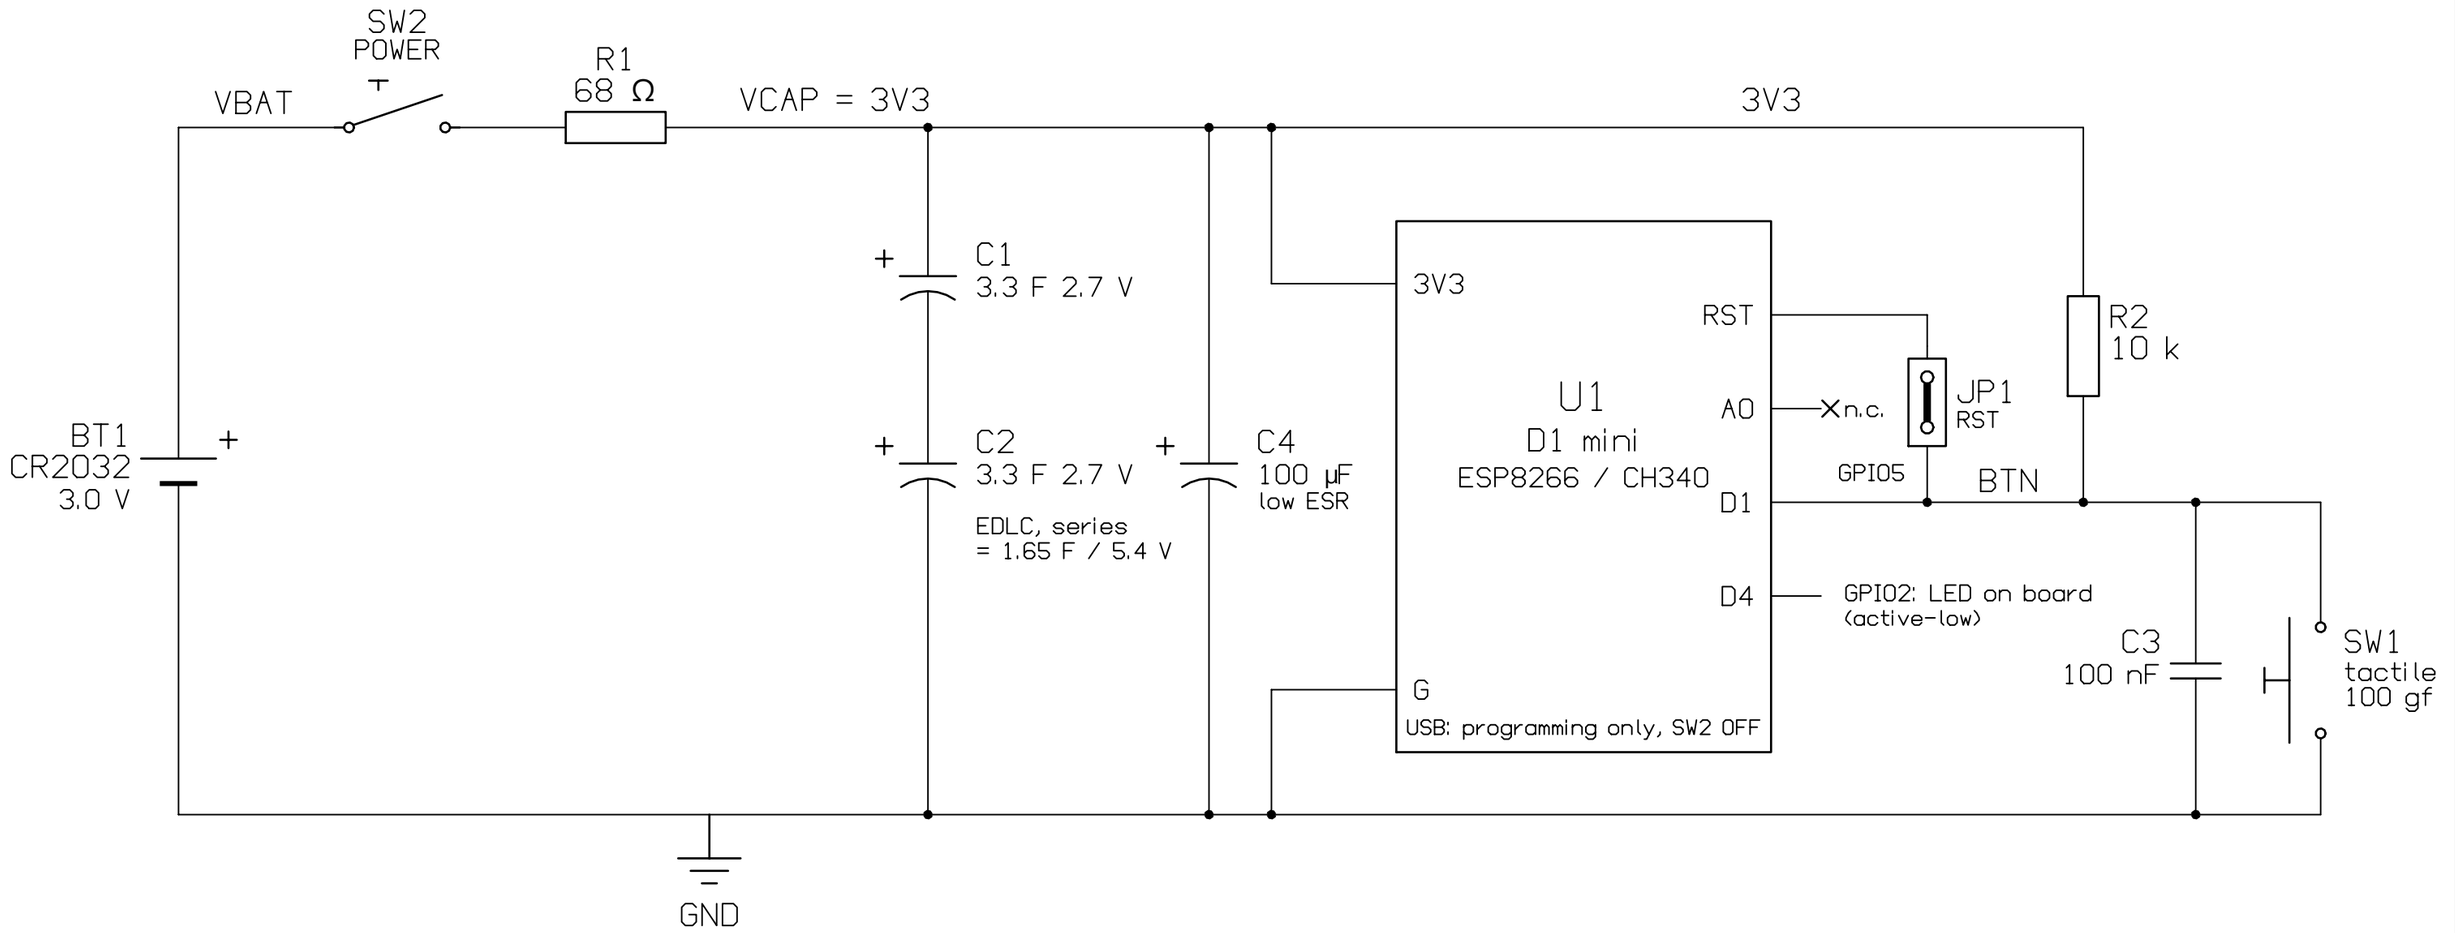


NOTES
1. SW2 OFF before connecting USB: the on-board USB LDO (3.3 V) would push current back into the cell.
2. A0 must stay unconnected (ADC_VCC): the firmware reads VCC with ADC_MODE(ADC_VCC).
3. C1 + C2 in series = 1.65 F / 5.4 V. R1 limits the cell current (<= 45 mA at insertion, then < 5 mA), tau = 112 s.
4. JP1 closed = battery mode: a press pulls RST low and wakes U1 from deep sleep. JP1 open = always_on (USB).
5. U1 is fed directly on its 3V3 pin (on-board LDO bypassed). Standby 0.2–0.3 mA => about 4–6 weeks per CR2032.
6. GPIO2 drives the LED already on the D1 mini (active-low): one blink per publish. SW1 pressed = GPIO5 LOW.

ESP8266 D1 mini MQTT battery button		
Schematic: power path + button Date: 2026-10-26	Rev A CADCraft	Sheet 1 / 1