




HO CHI MINH CITY UNIVERSITY OF TECHNOLOGY
COMPUTER ENGINEERING

Microcontroller

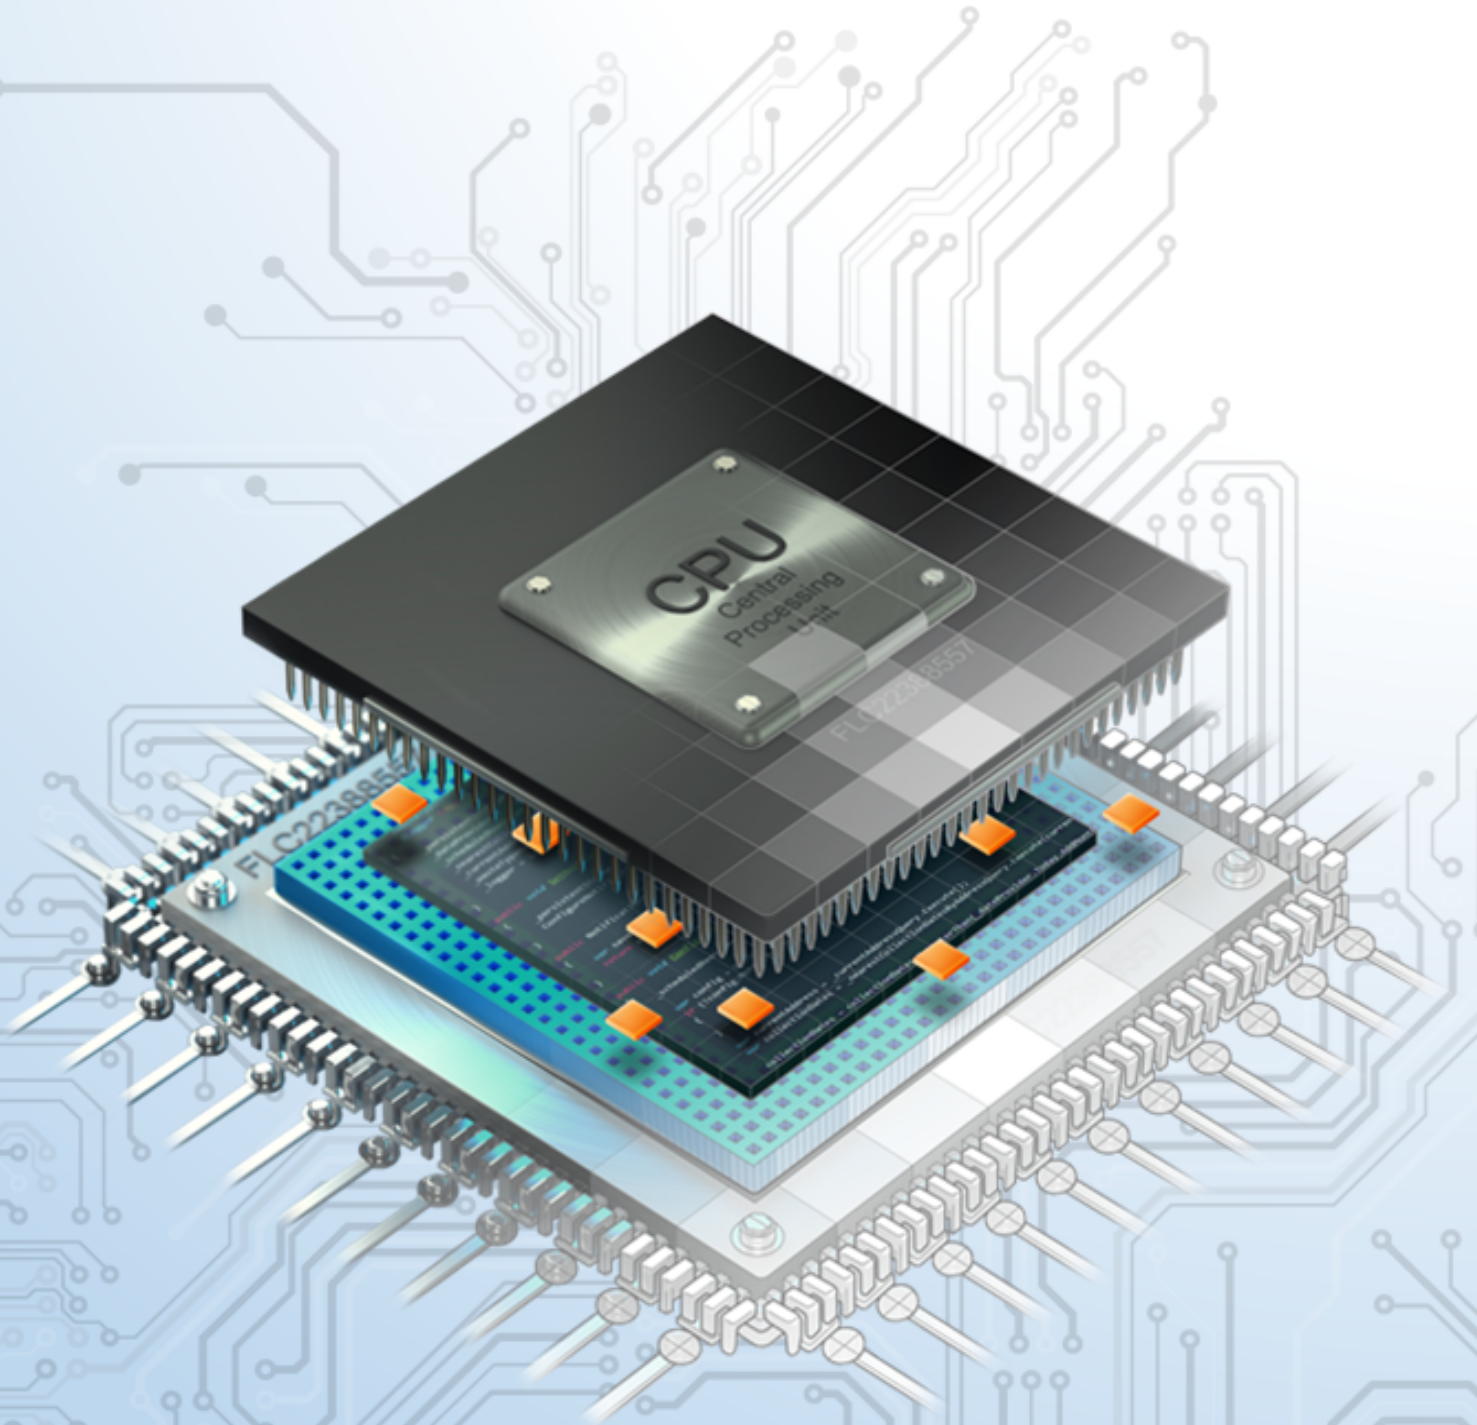

Lecture: Nguyễn Thiên Ân
Student: Đỗ Huy Minh Dũng


Mục lục

1	Introduction	3
2	Timer Interrupt Setup	5
3	Exercise and Report	8
3.1	Exercise 1	8
3.2	Exercise 2	10
3.3	Exercise 3	13
3.4	Exercise 4	16
3.5	Exercise 5	17
3.6	Exercise 6	18
3.7	Exercise 7	20
3.8	Exercise 8	20
3.9	Exercise 9	23
3.10	Exercise 10	28
4	Source code and simulation files	29

1 Introduction

Timers are one of the most important features in modern micro-controllers. They allow us to measure how long something takes to execute, create non-blocking code, precisely control pin timing, and even run operating systems. In this manual, how to configure a timer using STM32CubeIDE is presented how to use them to flash an LED. Finally, students are proposed to finalize 10 exercises using timer interrupt for applications based LED Scanning.

Design an interface for with multiple LED (seven segment or matrix) displays which is to be controlled is depends on the number of input and output pins needed for controlling all the LEDs in the given matrix display, the amount of current that each pin can source and sink and the speed at which the micro-controller can send out control signals. With all these specifications, interfacing can be done for 4 seven segment LEDs with a micro-controller is proposed in the figure above.

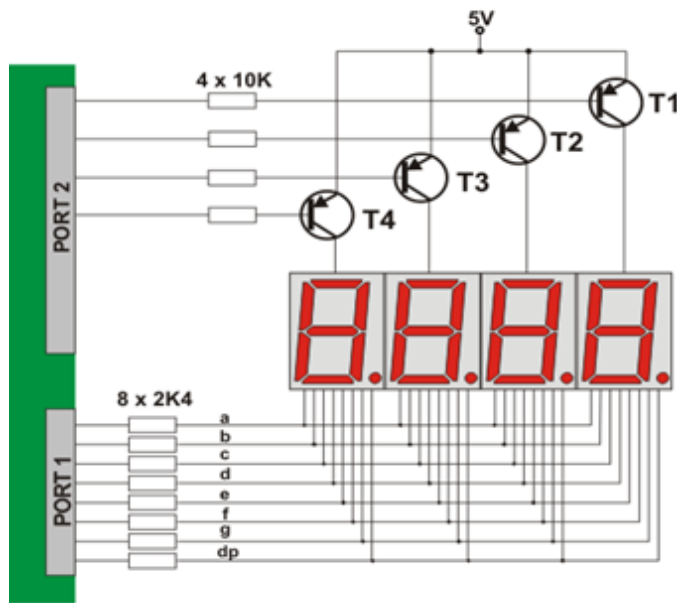

Hình 1: Four seven segment LED interface for a micro-controller


In the above diagram each seven segment display is having 8 internal LEDs, leading to the total number of LEDs is 32. However, not all the LEDs are required to turn ON, but one of them is needed. Therefore, only 12 lines are needed to control the whole 4 seven segment LEDs. By controlling with the micro-controller, we can turn ON an LED during a same interval T_s . Therefore, the period for controlling all 4 seven segment LEDs is $4T_s$. In other words, these LEDs are scanned at frequency $f = 1/4T_s$. Finally, it is obviously that if the frequency is greater than 30Hz (e.g. $f = 50\text{Hz}$), it seems that all LEDs are turn ON at the same time.

In this manual, the timer interrupt is used to design the interval T_s for LED scanning. Unfortunately, the simulation on Proteus can not execute at high frequency, the frequency f is set to a low value (e.g. 1Hz). In a real implementation, this frequency should be 50Hz.

2 Timer Interrupt Setup


Step 1: Create a simple project, which LED connected to PA5. The manual can be found in the first lab.

Step 2: Check the clock source of the system on the tab **Clock Configuration** (from *.ioc file). In the default configuration, the internal clock source is used with 8MHz, as shown in the figure bellow.

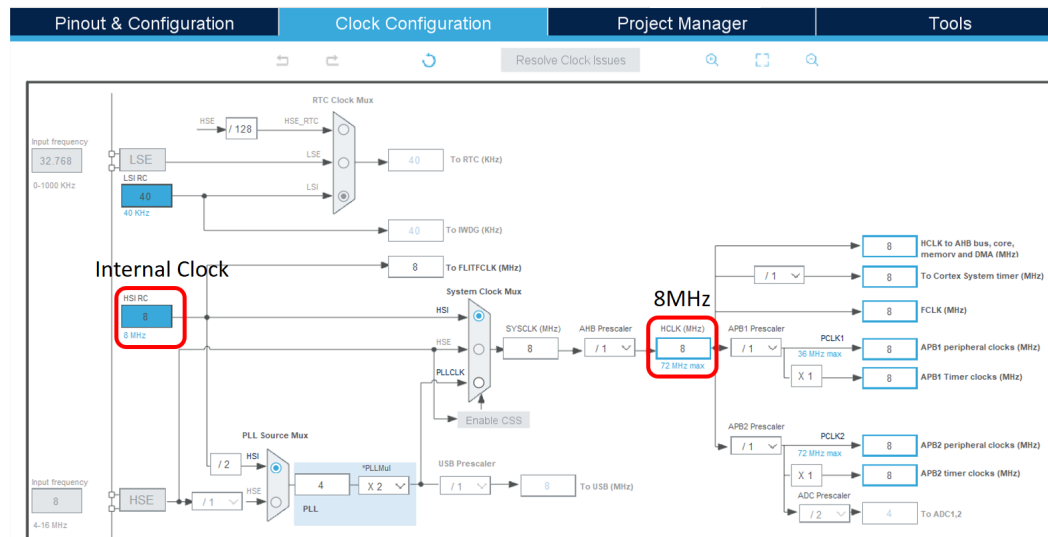

Hình 2: Default clock source for the system

Step 3: Configure the timer on the **Parameter Settings**, as follows:

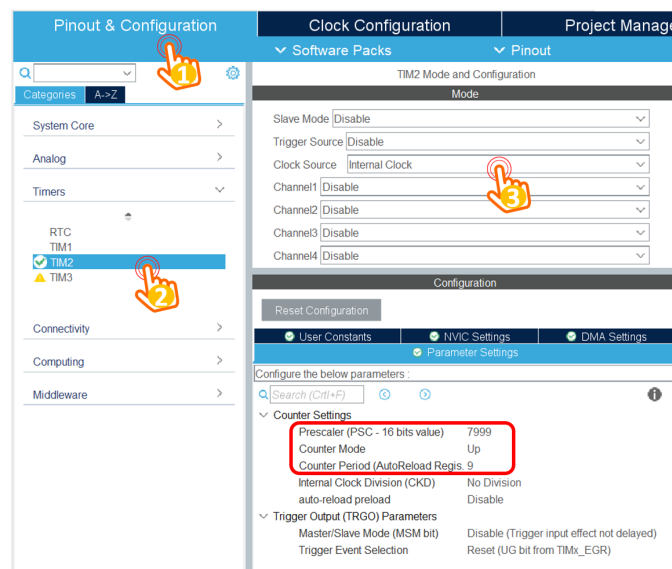


Hình 3: Configure for Timer 2

Select the clock source for timer 2 to the **Internal Clock**. Finally, set the prescaler and the counter to 7999 and 9, respectively. These values are explained as follows:

- The target is to set an interrupt timer to 10ms
- The clock source is 8MHz, by setting the prescaler to 7999, the input clock source to the timer is $8\text{MHz}/(7999+1) = 1000\text{Hz}$.
- The interrupt is raised when the timer counter is counted from 0 to 9, meaning that the frequency is divided by 10, which is 100Hz.
- The frequency of the timer interrupt is 100Hz, meaning that the period is $1/100\text{Hz} = 10\text{ms}$.

Step 4: Enable the timer interrupt by switching to **NVIC Settings** tab, as follows:

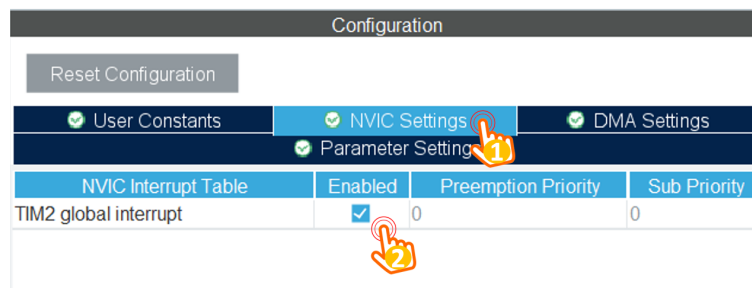

Hình 4: Enable timer interrupt

Finally, save the configuration file to generate the source code.

Step 5: On the **main()** function, call the timer init function, as follows:

```

1 int main(void)
2 {
3     HAL_Init();
4     SystemClock_Config();
5
6     MX_GPIO_Init();
7     MX_TIM2_Init();
8
9     /* USER CODE BEGIN 2 */
10    HAL_TIM_Base_Start_IT(&htim2);
11    /* USER CODE END 2 */
12
13    while (1){
14
15    }
16 }
```

Program 1: Init the timer interrupt in main

Please put the init function in a right place to avoid conflicts when code generation is executed (e.g. ioc file is updated).

Step 6: Add the interrupt service routine function, this function is invoked every 10ms, as follows:

```
1 /* USER CODE BEGIN 4 */
2 void HAL_TIM_PeriodElapsedCallback(TIM_HandleTypeDef *htim)
3 {
4 }
5 /* USER CODE END 4 */
```

Program 2: Add an interrupt service routine

Step 7: To run a LED Blinky demo using interrupt, a short manual is presented as follows:

```
1 /* USER CODE BEGIN 4 */
2 int counter = 100;
3 void HAL_TIM_PeriodElapsedCallback(TIM_HandleTypeDef *htim)
4 {
5     counter--;
6     if(counter <= 0){
7         counter = 100;
8         HAL_GPIO_TogglePin(LED_RED_GPIO_Port , LED_RED_Pin);
9     }
10 }
11 /* USER CODE END 4 */
```

Program 3: LED Blinky using timer interrupt

The **HAL_TIM_PeriodElapsedCallback** function is an infinite loop, which is invoked every cycle of the timer 2, in this case, is 10ms.


3 Exercise and Report

3.1 Exercise 1

The first exercise show how to interface for multiple seven segment LEDs to STM32F103C6 micro-controller (MCU). Seven segment displays are common anode type, meaning that the anode of all LEDs are tied together as a single terminal and cathodes are left alone as individual pins.

In order to save the resource of the MCU, individual cathode pins from all the seven segment LEDs are connected together, and connect to 7 pins of the MCU. These pins are popular known as the **signal pins**. Meanwhile, the anode pin of each seven segment LEDs are controlled under a power enabling circuit, for instance, an PNP transistor. At a given time, only one seven segment LED is turned on. However, if the delay is small enough, it seems that all LEDs are enabling.

Implement the circuit simulation in Proteus with two 7-SEGMENT LEDs as following:

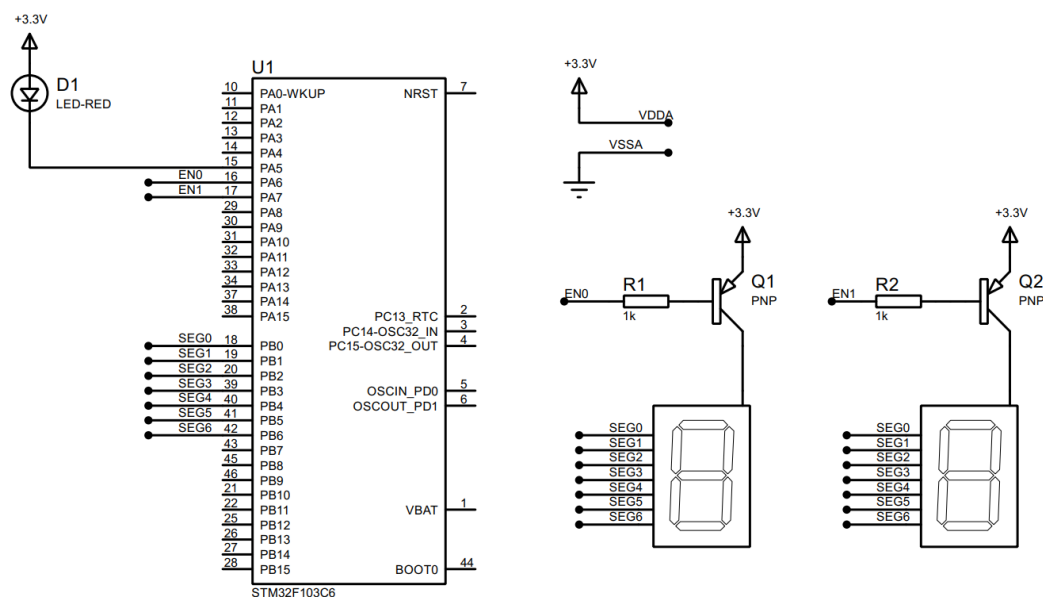


Hình 5: Simulation schematic in Proteus

Components used in the schematic are listed bellow:

- 7SEG-COM-ANODE (connected from PB0 to PB6)
- LED-RED
- PNP
- RES
- STM32F103C6

Students are proposed to use the function **display7SEG(int num)** in the Lab 1 in this exercise. Implement the source code in the interrupt callback function to display number "1" on the first seven segment and number "2" for second one. The switching time between 2 LEDs is half of second.

Report 1: Capture your schematic from Proteus and show in the report.

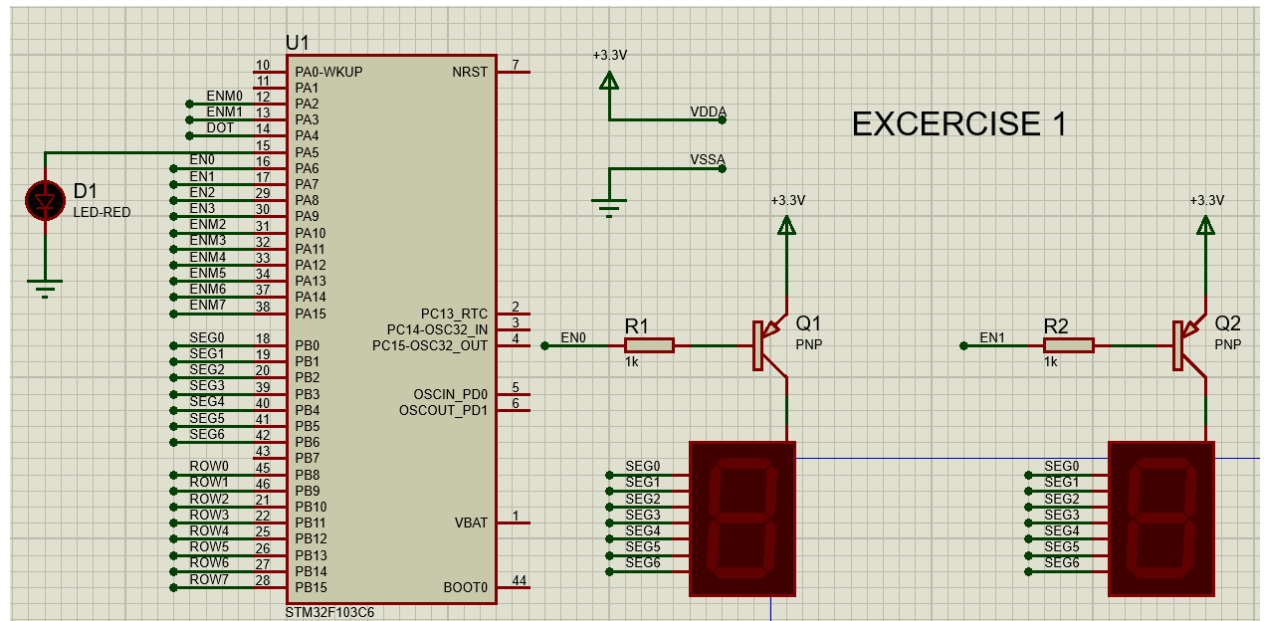

Hình 6: Schematic from Proteus

Report 2: Present your source code in the **HAL_TIM_PeriodElapsedCallback** function.

```

1 #define TICK 10
2 int timer_flag = 0;
3 int timer_counter = 50;
4 void setTimer1(int time){
5     timer_flag = 0;
6     timer_counter = time / TICK;
7 }
8 void timerRun1(){
9     if(timer_counter > 0){
10         timer_counter--;
11         if(timer_counter <= 0){
12             timer_flag = 1;
13         }
14     }
15 }
16 int state = 1;
17 void ex1(){
18     if(timer_flag == 1){
19         setTimer1(500);
20         switch(state){

```

```

21         case 1:
22             HAL_GPIO_WritePin(EN0_GPIO_Port, EN0_Pin, 0);
23             HAL_GPIO_WritePin(EN1_GPIO_Port, EN1_Pin, 1);
24             display7SEG(1);
25             break;
26         case 2:
27             HAL_GPIO_WritePin(EN0_GPIO_Port, EN0_Pin, 1);
28             HAL_GPIO_WritePin(EN1_GPIO_Port, EN1_Pin, 0);
29             display7SEG(2);
30             break;
31         default: break;
32     }
33     state = 3 - state;
34 }
35
36 int main(void){
37     HAL_Init();
38     SystemClock_Config();
39     MX_GPIO_Init();
40     MX_TIM2_Init();
41     HAL_TIM_Base_Start_IT (& htim2 );
42
43     setTimer1(500);
44     while(1){
45         ex1();
46     }
47 }
48 void HAL_TIM_PeriodElapsedCallback ( TIM_HandleTypeDef *
49     htim ){
50     timerRun1();
51 }


```

Short question: What is the frequency of the scanning process?

Answer: The frequency of the scanning process is 1Hz. The system repeat it's behavior each second.

3.2 Exercise 2


Extend to 4 seven segment LEDs and two LEDs (connected to PA4, labeled as **DOT**) in the middle as following:

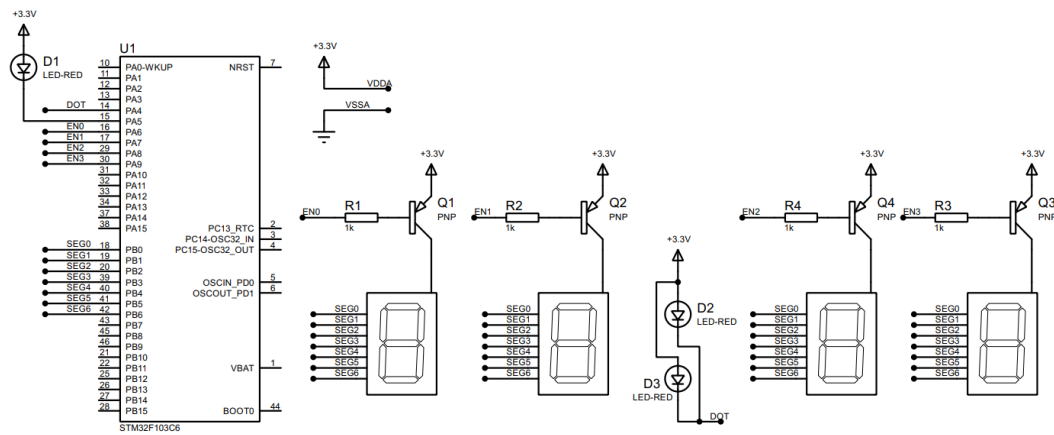

Hình 7: Simulation schematic in Proteus

Blink the two LEDs every second. Meanwhile, number 3 is displayed on the third seven segment and number 0 is displayed on the last one (to present 12 hour and a half). The switching time for each seven segment LED is also a half of second (500ms). **Implement your code in the timer interrupt function.**

Report 1: Capture your schematic from Proteus and show in the report.

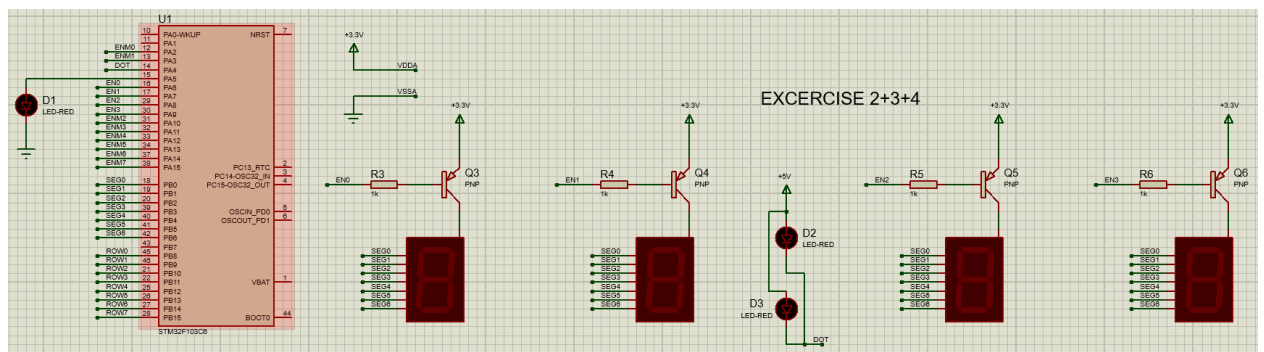

Hình 8: Schematic from Proteus

Report 2: Present your source code in the **HAL_TIM_PeriodElapsedCallback** function.

```

1 #define TICK 10
2 int timer1_flag = 0;
3 int timer2_flag = 0;
4 int counter1 = 50;
5 int counter2 = 100;
6 void setTimer2_1(int time){
7     counter1 = time / TICK;
8     timer1_flag = 0;
9 }
10 void setTimer2_2(int time){
11     counter2 = time / TICK;
12     timer2_flag = 0;

```

```

13 }
14 void timerRun2_1(){
15     if(counter1 > 0){
16         counter1--;
17         if(counter1 <= 0){
18             timer1_flag = 1;
19         }
20     }
21 }
22 void timerRun2_2(){
23     if(counter2 > 0){
24         counter2--;
25         if(counter2 <= 0){
26             timer2_flag = 1;
27         }
28     }
29 }
30 int state2 = 0;
31 void ex2(){
32     if(timer1_flag == 1){
33         setTimer2_1(500);
34         switch(state2){
35             case 0:
36                 HAL_GPIO_WritePin(EN0_GPIO_Port, EN0_Pin, 0);
37                 HAL_GPIO_WritePin(EN1_GPIO_Port, EN1_Pin, 1);
38                 HAL_GPIO_WritePin(EN2_GPIO_Port, EN2_Pin, 1);
39                 HAL_GPIO_WritePin(EN3_GPIO_Port, EN3_Pin, 1);
40                 display7SEG(1);
41                 break;
42             case 1:
43                 HAL_GPIO_WritePin(EN0_GPIO_Port, EN0_Pin, 1);
44                 HAL_GPIO_WritePin(EN1_GPIO_Port, EN1_Pin, 0);
45                 HAL_GPIO_WritePin(EN2_GPIO_Port, EN2_Pin, 1);
46                 HAL_GPIO_WritePin(EN3_GPIO_Port, EN3_Pin, 1);
47                 display7SEG(2);
48                 break;
49             case 2:
50                 HAL_GPIO_WritePin(EN0_GPIO_Port, EN0_Pin, 1);
51                 HAL_GPIO_WritePin(EN1_GPIO_Port, EN1_Pin, 1);
52                 HAL_GPIO_WritePin(EN2_GPIO_Port, EN2_Pin, 0);
53                 HAL_GPIO_WritePin(EN3_GPIO_Port, EN3_Pin, 1);
54                 display7SEG(3);
55                 break;
56             case 3:
57                 HAL_GPIO_WritePin(EN0_GPIO_Port, EN0_Pin, 1);
58                 HAL_GPIO_WritePin(EN1_GPIO_Port, EN1_Pin, 1);
59                 HAL_GPIO_WritePin(EN2_GPIO_Port, EN2_Pin, 1);
60                 HAL_GPIO_WritePin(EN3_GPIO_Port, EN3_Pin, 0);
61                 display7SEG(0);

```

```

62     break;
63     default: break;
64 }
65 state2++;
66 if(state2 >= 4){
67     state2 = 0;
68 }
69 }
70 if(timer2_flag == 1){
71     setTimer2_2(1000);
72     HAL_GPIO_TogglePin(DOT_GPIO_Port , DOT_Pin);
73 }
74 }
75 int main(void){
76     HAL_Init();
77     SystemClock_Config();
78     MX_GPIO_Init();
79     MX_TIM2_Init();
80     HAL_TIM_Base_Start_IT (& htim2 );
81
82     setTimer2_1(500);
83     setTimer2_2(1000);
84     while(1){
85         ex2();
86     }
87 }
88 void HAL_TIM_PeriodElapsedCallback ( TIM_HandleTypeDef *
    htim ){
89     timerRun2_1();
90     timerRun2_2();
91 }

```

Short question: What is the frequency of the scanning process?

Answer: The frequency of the whole scanning process is 0.5Hz. We have 4 seven segment LED, the switching time for each LED is half of second switch so it take 2 second to repeat the period of the system

3.3 Exercise 3

Implement a function named **update7SEG(int index)**. An array of 4 integer numbers are declared in this case. The code skeleton in this exercise is presented as following:

```

1 const int MAX_LED = 4;
2 int index_led = 0;
3 int led_buffer[4] = {1, 2, 3, 4};
4 void update7SEG(int index){
5     switch (index){
6         case 0:
7             //Display the first 7SEG with led_buffer[0]
8             break;
9         case 1:
10            //Display the second 7SEG with led_buffer[1]
11            break;
12        case 2:
13            //Display the third 7SEG with led_buffer[2]
14            break;
15        case 3:
16            //Display the forth 7SEG with led_buffer[3]
17            break;
18        default:
19            break;
20    }
21 }

```

Program 4: An example for your source code

This function should be invoked in the timer interrupt, e.g `update7SEG(index_led++)`. The variable **index_led** is updated to stay in a valid range, which is from 0 to 3.

Report 1: Present the source code of the `update7SEG` function.

```

1 void update7SEG(int index){
2     switch (index){
3         case 0:
4             HAL_GPIO_WritePin(EN0_GPIO_Port, EN0_Pin, 0);
5             HAL_GPIO_WritePin(EN1_GPIO_Port, EN1_Pin, 1);
6             HAL_GPIO_WritePin(EN2_GPIO_Port, EN2_Pin, 1);
7             HAL_GPIO_WritePin(EN3_GPIO_Port, EN3_Pin, 1);
8             display7SEG(led_buffer[0]);
9             break;
10        case 1:
11            HAL_GPIO_WritePin(EN0_GPIO_Port, EN0_Pin, 1);
12            HAL_GPIO_WritePin(EN1_GPIO_Port, EN1_Pin, 0);
13            HAL_GPIO_WritePin(EN2_GPIO_Port, EN2_Pin, 1);
14            HAL_GPIO_WritePin(EN3_GPIO_Port, EN3_Pin, 1);
15            display7SEG(led_buffer[1]);
16            break;
17        case 2:
18            HAL_GPIO_WritePin(EN0_GPIO_Port, EN0_Pin, 1);
19            HAL_GPIO_WritePin(EN1_GPIO_Port, EN1_Pin, 1);
20            HAL_GPIO_WritePin(EN2_GPIO_Port, EN2_Pin, 0);

```

```

21     HAL_GPIO_WritePin(EN3_GPIO_Port , EN3_Pin , 1);
22     display7SEG(led_buffer[2]);
23     break;
24 case 3:
25     HAL_GPIO_WritePin(EN0_GPIO_Port , EN0_Pin , 1);
26     HAL_GPIO_WritePin(EN1_GPIO_Port , EN1_Pin , 1);
27     HAL_GPIO_WritePin(EN2_GPIO_Port , EN2_Pin , 1);
28     HAL_GPIO_WritePin(EN3_GPIO_Port , EN3_Pin , 0);
29     display7SEG(led_buffer[3]);
30     break;
31 default: break;
32 }
33 }

```

Report 2: Present the source code in the HAL_TIM_PeriodElapsedCallback. Students are proposed to change the values in the **led_buffer** array for unit test this function, which is used afterward.

```

1  #define TICK 10
2  int count3_1 = 50;
3  int flag3_1 = 0;
4  int count3_2 = 100;
5  int flag3_2 = 0;
6  void setTimer3_1(int time){
7      count3_1 = time / TICK;
8      flag3_1 = 0;
9  }
10 void timerRun3_1(){
11     if(count3_1 > 0){
12         count3_1--;
13         if(count3_1 <= 0){
14             flag3_1 = 1;
15         }
16     }
17 }
18 void setTimer3_2(int time){
19     count3_2 = time / TICK;
20     flag3_2 = 0;
21 }
22 void timerRun3_2(){
23     if(count3_2 > 0){
24         count3_2--;
25         if(count3_2 <= 0){
26             flag3_2 = 1;
27         }
28     }
29 }
30 void ex3(){
31     if(flag3_1 == 1){
32         setTimer3_1(500);

```

```

33     update7SEG(index_led++);
34     if(index_led >= MAX_LED){
35         index_led = 0;
36     }
37 }
38 if(flag3_2 == 1){
39     setTimer3_2(1000);
40     HAL_GPIO_TogglePin(DOT_GPIO_Port , DOT_Pin);
41 }
42 }
43 int main(void){
44     HAL_Init();
45     SystemClock_Config();
46     MX_GPIO_Init();
47     MX_TIM2_Init();
48     HAL_TIM_Base_Start_IT (& htim2 );
49
50     setTimer3_1(500);
51     setTimer3_1(1000);
52     while(1){
53         ex3();
54     }
55 }
56 void HAL_TIM_PeriodElapsedCallback ( TIM_HandleTypeDef *
    htim ){
57     timerRun3_1();
58     timerRun3_2();
59 }

```

3.4 Exercise 4

Change the period of invoking update7SEG function in order to set the frequency of 4 seven segment LEDs to 1Hz. The DOT is still blinking every second.

Report 1: Present the source code in the **HAL_TIM_PeriodElapsedCallback**.

```

1 void ex4(){
2     if(flag3_1 == 1){
3         setTimer3_1(250);
4         update7SEG(index_led++);
5         if(index_led >= MAX_LED){
6             index_led = 0;
7         }
8     }
9     if(flag3_2 == 1){
10         setTimer3_2(1000);
11         HAL_GPIO_TogglePin(DOT_GPIO_Port , DOT_Pin);
12     }
13 }
14 int main(void){

```



```

15     HAL_Init();
16     SystemClock_Config();
17     MX_GPIO_Init();
18     MX_TIM2_Init();
19     HAL_TIM_Base_Start_IT (& htim2 );
20
21     setTimer3_1(250);
22     setTimer3_1(1000);
23     while(1){
24         ex4();
25     }
26 }
27 void HAL_TIM_PeriodElapsedCallback ( TIM_HandleTypeDef *
    htim ){
28     timerRun3_1();
29     timerRun3_2();
30 }

```

3.5 Exercise 5

Implement a digital clock with **hour** and **minute** information displayed by 2 seven segment LEDs. The code skeleton in the **main** function is presented as follows:

```

1 int hour = 15, minute = 8, second = 50;
2
3 while(1){
4     second++;
5     if (second >= 60){
6         second = 0;
7         minute++;
8     }
9     if(minute >= 60){
10        minute = 0;
11        hour++;
12    }
13    if(hour >=24){
14        hour = 0;
15    }
16    updateClockBuffer();
17    HAL_Delay(1000);
18 }

```

Program 5: An example for your source code

The function **updateClockBuffer** will generate values for the array **led_buffer** according to the values of hour and minute. In the case these values are 1 digit number, digit 0 is added.

Report 1: Present the source code in the **updateClockBuffer** function.

```

1 int hour = 15 , minute = 8 , second = 50;
2 int ledBuffer[4] = {1 , 5 , 0 , 8};
3 void updateClockBuffer(){
4     ledBuffer[2] = minute / 10;
5     ledBuffer[3] = minute % 10;
6     ledBuffer[0] = hour/10;
7     ledBuffer[1] = hour%10;
8 }

```

3.6 Exercise 6

The main target from this exercise to reduce the complexity (or reduce code processing) in the timer interrupt. The time consumed in the interrupt can lead to the nested interrupt issue, which can crash the whole system. A simple solution can disable the timer whenever the interrupt occurs, the enable it again. However, the real-time processing is not guaranteed anymore.

In this exercise, a software timer is created and its counter is count down every timer interrupt is raised (every 10ms). By using this timer, the **Hal_Delay(1000)** in the main function is removed. In a MCU system, non-blocking delay is better than blocking delay. The details to create a software timer are presented bellow. The source code is added to your current program, **do not delete the source code you have on Exercise 5.**

Step 1: Declare variables and functions for a software timer, as following:

```

1 /* USER CODE BEGIN 0 */
2 int timer0_counter = 0;
3 int timer0_flag = 0;
4 int TIMER_CYCLE = 10;
5 void setTimer0(int duration){
6     timer0_counter = duration /TIMER_CYCLE;
7     timer0_flag = 0;
8 }
9 void timer_run(){
10     if(timer0_counter > 0){
11         timer0_counter--;
12         if(timer0_counter == 0) timer0_flag = 1;
13     }
14 }
15 /* USER CODE END 0 */

```

Program 6: Software timer based timer interrupt

Please change the **TIMER_CYCLE** to your timer interrupt period. In the manual code above, it is **10ms**.

Step 2: The **timer_run()** is invoked in the timer interrupt as following:

```

1 void HAL_TIM_PeriodElapsedCallback(TIM_HandleTypeDef *htim)
  {
2
3   timer_run();
4
5   //YOUR OTHER CODE
6 }

```

Program 7: Software timer based timer interrupt

Step 3: Use the timer in the main function by invoked setTimer0 function, then check for its flag (timer0_flag). An example to blink an LED connected to PA5 using software timer is shown as follows:

```

1 setTimer0(1000);
2 while (1){
3     if(timer0_flag == 1){
4         HAL_GPIO_TogglePin(LED_RED_GPIO_Port , LED_RED_Pin);
5         setTimer0(2000);
6     }
7 }

```

Program 8: Software timer is used in main fuction to blink the LED

Report 1: if in line 1 of the code above is miss, what happens after that and why?

Answer: The timer will never be set, meaning the variable timer0_counter remains at 0. As a result, timer0_flag will never be set to 1, and the LED toggle operation in line 4 will not execute. Because the timer_run() function relies on timer0_counter to decrease from a non-zero value until it reaches 0, which sets timer0_flag to 1. Without calling setTimer(), timer0_counter stays 0, so the condition in line 3 (timer0_flag == 1) is never satisfied.

Report 2: if in line 1 of the code above is changed to setTimer0(1), what happens after that and why?

Answer: The timer0_counter is set to 1 / TIMER_CYCLE = 1 / 10 = 0. As a result, timer0_flag will never be set to 1, and the LED toggle operation in line 4 will not execute. Because the timer_run() function relies on timer0_counter to decrease from a non-zero value until it reaches 0, which sets timer0_flag to 1. Without calling setTimer(), timer0_counter stays 0, so the condition in line 3 (timer0_flag == 1) is never satisfied.

Report 3: if in line 1 of the code above is changed to setTimer0(10), what is changed compared to 2 first questions and why?

Answer: The timer will expire after one TIMER_CYCLE. We have 10 / 10 = 1, so timer0_counter will be set to 1, and after one cycle of timer_run(), the counter will reach 0 and set timer0_flag to 1, toggling the LED. Because when setTimer6(10) is called, timer0_counter is set to 1 (10 / 10 = 1). This means that timer0_flag will be set to 1 after exactly one cycle of timer_run().

3.7 Exercise 7

Upgrade the source code in Exercise 5 (update values for hour, minute and second) by using the software timer and remove the HAL_Delay function at the end. Moreover, the DOT (connected to PA4) of the digital clock is also moved to main function.

Report 1: Present your source code in the while loop on main function.

```
1 while(1){
2     if(flag7_1 == 1){
3         setTimer7_1(1000);
4         second++;
5         if ( second >= 60) {
6             second = 0;
7             minute++;
8         }
9         if( minute >= 60) {
10            minute = 0;
11            hour++;
12        }
13        if( hour >=24) {
14            hour = 0;
15        }
16        updateClockBuffer();
17    }
18    if(flag7_2 == 1){
19        setTimer7_2(1000);
20        HAL_GPIO_TogglePin(DOT_GPIO_Port , DOT_Pin);
21    }
22 }
```

3.8 Exercise 8

Move also the update7SEG() function from the interrupt timer to the main. Finally, the timer interrupt only used to handle software timers. All processing (or complex computations) is move to an infinite loop on the main function, optimizing the complexity of the interrupt handler function.

Report 1: Present your source code in the the main function. In the case more extra functions are used (e.g. the second software timer), present them in the report as well.

```
1 #define TICK 10
2 int ledBuffer[4] = {1 , 5 , 0 , 8}, idx = 0;
3 int hour = 15 , minute = 8 , second = 50;
4 void updateClockBuffer(){
5     ledBuffer[2] = minute / 10;
```

```

6     ledBuffer[3] = minute % 10;
7     ledBuffer[0] = hour/10;
8     ledBuffer[1] = hour%10;
9 }
10 void update7SEG_2(int index){ //function from exercise 3
11     switch (index){
12     case 0:
13         display7SEG(ledBuffer[0]);
14         HAL_GPIO_WritePin(EN0_GPIO_Port, EN0_Pin, 0);
15         HAL_GPIO_WritePin(EN1_GPIO_Port, EN1_Pin, 1);
16         HAL_GPIO_WritePin(EN2_GPIO_Port, EN2_Pin, 1);
17         HAL_GPIO_WritePin(EN3_GPIO_Port, EN3_Pin, 1);
18         break;
19     case 1:
20         display7SEG(ledBuffer[1]);
21         HAL_GPIO_WritePin(EN0_GPIO_Port, EN0_Pin, 1);
22         HAL_GPIO_WritePin(EN1_GPIO_Port, EN1_Pin, 0);
23         HAL_GPIO_WritePin(EN2_GPIO_Port, EN2_Pin, 1);
24         HAL_GPIO_WritePin(EN3_GPIO_Port, EN3_Pin, 1);
25         break;
26     case 2:
27         display7SEG(ledBuffer[2]);
28         HAL_GPIO_WritePin(EN0_GPIO_Port, EN0_Pin, 1);
29         HAL_GPIO_WritePin(EN1_GPIO_Port, EN1_Pin, 1);
30         HAL_GPIO_WritePin(EN2_GPIO_Port, EN2_Pin, 0);
31         HAL_GPIO_WritePin(EN3_GPIO_Port, EN3_Pin, 1);
32         break;
33     case 3:
34         display7SEG(ledBuffer[3]);
35         HAL_GPIO_WritePin(EN0_GPIO_Port, EN0_Pin, 1);
36         HAL_GPIO_WritePin(EN1_GPIO_Port, EN1_Pin, 1);
37         HAL_GPIO_WritePin(EN2_GPIO_Port, EN2_Pin, 1);
38         HAL_GPIO_WritePin(EN3_GPIO_Port, EN3_Pin, 0);
39         break;
40     default: break;
41     }
42 }
43 int flag7_1 = 0;
44 int counter7_1 = 100;
45 int flag7_2 = 0;
46 int counter7_2 = 100;
47 int flag7_3 = 0;
48 int counter7_3 = 25;
49 void setTimer7_1(int time){
50     counter7_1 = time / TICK;
51     flag7_1 = 0;
52 }
53 void setTimer7_2(int time){
54     counter7_2 = time / TICK;

```

```

55     flag7_2 = 0;
56 }
57 void setTimer7_3(int time){
58     counter7_3 = time / TICK;
59     flag7_3 = 0;
60 }
61 void timerRun7_1(){
62     if(counter7_1 > 0){
63         counter7_1--;
64         if(counter7_1 <= 0) flag7_1 = 1;
65     }
66 }
67 void timerRun7_2(){
68     if(counter7_2 > 0){
69         counter7_2--;
70         if(counter7_2 <= 0) flag7_2 = 1;
71     }
72 }
73 void timerRun7_3(){
74     if(counter7_3 > 0){
75         counter7_3--;
76         if(counter7_3 <= 0) flag7_3 = 1;
77     }
78 }
79 void ex7(){
80     if(flag7_1 == 1){
81         setTimer7_1(1000);
82         second++;
83         if ( second >= 60) {
84             second = 0;
85             minute++;
86         }
87         if( minute >= 60) {
88             minute = 0;
89             hour++;
90         }
91         if( hour >=24) {
92             hour = 0;
93         }
94         updateClockBuffer();
95     }
96     if(flag7_2 == 1){
97         setTimer7_2(1000);
98         HAL_GPIO_TogglePin(DOT_GPIO_Port, DOT_Pin);
99     }
100 ////////////////////////////////////////////////// EXERCISE8 ///////////////////////////////////
101     if(flag7_3 == 1){
102         setTimer7_3(250);
103         update7SEG_2(idx++);

```


```

104         if(idx >= 4){
105             idx = 0;
106         }
107     }
108 }
109 int main(void){
110     HAL_Init();
111     SystemClock_Config();
112     MX_GPIO_Init();
113     MX_TIM2_Init();
114     HAL_TIM_Base_Start_IT (& htim2 );
115
116     setTimer7_1(1000);
117     setTimer7_2(1000);
118     setTimer7_3(250);
119     while(1){
120         ex7();
121     }
122 }
123 void HAL_TIM_PeriodElapsedCallback ( TIM_HandleTypeDef *
    htim ){
124     timerRun7_1();
125     timerRun7_2();
126     timerRun7_3();
127 }

```

3.9 Exercise 9

This is an extra works for this lab. A LED Matrix is added to the system. A reference design is shown in figure bellow:

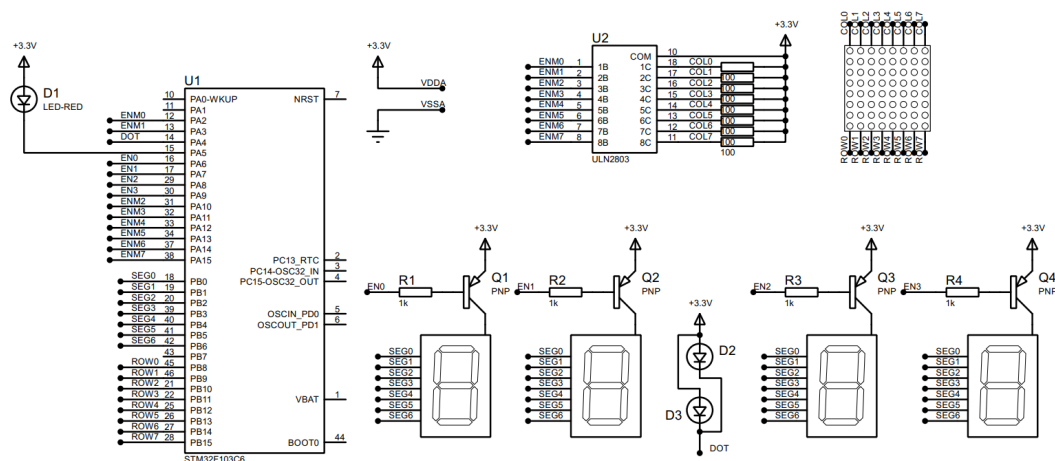


Hình 9: LED matrix is added to the simulation

In this schematic, two new components are added, including the **MATRIX-8X8-RED** and **ULN2803**, which is an NPN transistor array to enable the power supply

for a column of the LED matrix. Students can change the enable signal (from ENM0 to ENM7) if needed. Finally, the data signal (from ROW0 to ROW7) is connected to PB8 to PB15.

Report 1: Present the schematic of your system by capturing the screen in Proteus.

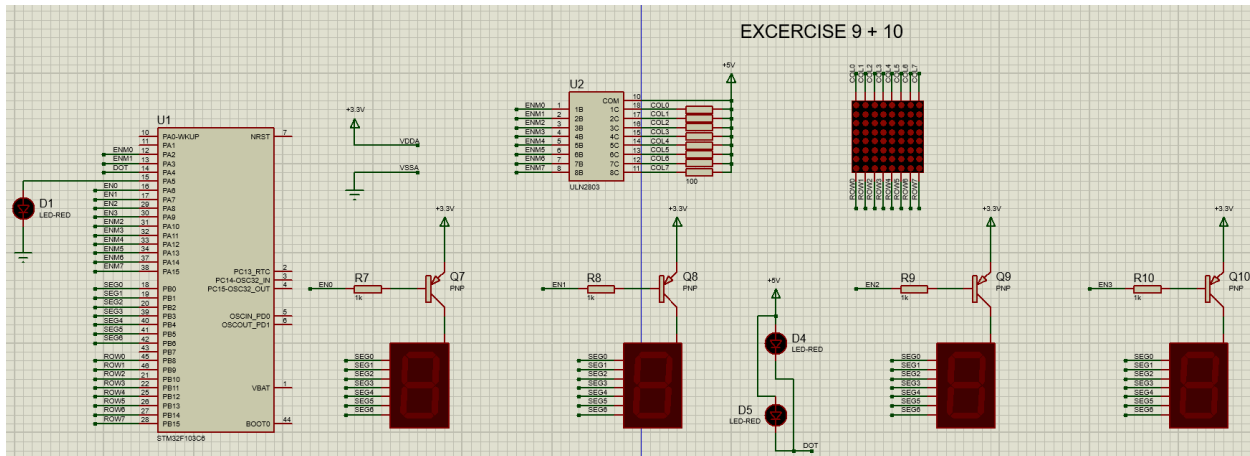

Hình 10: Schematic from proteus

Report 2: Implement the function, `updateLEDMatrix(int index)`, which is similarly to 4 seven led segments.

```
1 const int MAX_LED_MATRIX = 8;
2 int index_led_matrix = 0;
3 uint8_t matrix_buffer[8] = {0x01, 0x02, 0x03, 0x04, 0x05, 0
  x06, 0x07, 0x08};
4 void updateLEDMatrix(int index){
5     switch (index){
6         case 0:
7             break;
8         case 1:
9             break;
10        case 2:
11            break;
12        case 3:
13            break;
14        case 4:
15            break;
16        case 5:
17            break;
18        case 6:
19            break;
20        case 7:
21            break;
22        default:
23            break;
24    }
```


25 }

Program 9: Function to display data on LED Matrix

Students are free to choose the invoking frequency of this function. However, this function is supposed to be invoked in the main function. Finally, please update the **matrix_buffer** to display character "A".

```

1 #define MAX_LED_MATRIX 8
2 int index_led_matrix = 0;
3 uint8_t matrix_buffer[8] = {0xE7 , 0xC3 , 0x99 , 0x99 , 0
    x81 , 0x81 , 0x99 , 0x99};
4 void displayMatrixRow(uint8_t i){
5     HAL_GPIO_WritePin(ENM0_GPIO_Port, ENM0_Pin, i & 1);
6     HAL_GPIO_WritePin(ENM1_GPIO_Port, ENM1_Pin, i & 2);
7     HAL_GPIO_WritePin(ENM2_GPIO_Port, ENM2_Pin, i & 4);
8     HAL_GPIO_WritePin(ENM3_GPIO_Port, ENM3_Pin, i & 8);
9     HAL_GPIO_WritePin(ENM4_GPIO_Port, ENM4_Pin, i & 16);
10    HAL_GPIO_WritePin(ENM5_GPIO_Port, ENM5_Pin, i & 32);
11    HAL_GPIO_WritePin(ENM6_GPIO_Port, ENM6_Pin, i & 64);
12    HAL_GPIO_WritePin(ENM7_GPIO_Port, ENM7_Pin, i & 128);
13 }
14 void updateLEDMatrix(int index){
15     switch(index){
16     case 0:
17         HAL_GPIO_WritePin(ROW0_GPIO_Port, ROW0_Pin, 0);
18         HAL_GPIO_WritePin(ROW1_GPIO_Port, ROW1_Pin, 1);
19         HAL_GPIO_WritePin(ROW2_GPIO_Port, ROW2_Pin, 1);
20         HAL_GPIO_WritePin(ROW3_GPIO_Port, ROW3_Pin, 1);
21         HAL_GPIO_WritePin(ROW4_GPIO_Port, ROW4_Pin, 1);
22         HAL_GPIO_WritePin(ROW5_GPIO_Port, ROW5_Pin, 1);
23         HAL_GPIO_WritePin(ROW6_GPIO_Port, ROW6_Pin, 1);
24         HAL_GPIO_WritePin(ROW7_GPIO_Port, ROW7_Pin, 1);
25         displayMatrixRow(matrix_buffer[0]);
26         break;
27     case 1:
28         HAL_GPIO_WritePin(ROW0_GPIO_Port, ROW0_Pin, 1);
29         HAL_GPIO_WritePin(ROW1_GPIO_Port, ROW1_Pin, 0);
30         HAL_GPIO_WritePin(ROW2_GPIO_Port, ROW2_Pin, 1);
31         HAL_GPIO_WritePin(ROW3_GPIO_Port, ROW3_Pin, 1);
32         HAL_GPIO_WritePin(ROW4_GPIO_Port, ROW4_Pin, 1);
33         HAL_GPIO_WritePin(ROW5_GPIO_Port, ROW5_Pin, 1);
34         HAL_GPIO_WritePin(ROW6_GPIO_Port, ROW6_Pin, 1);
35         HAL_GPIO_WritePin(ROW7_GPIO_Port, ROW7_Pin, 1);
36         displayMatrixRow(matrix_buffer[1]);
37         break;
38     case 2:
39         HAL_GPIO_WritePin(ROW0_GPIO_Port, ROW0_Pin, 1);
40         HAL_GPIO_WritePin(ROW1_GPIO_Port, ROW1_Pin, 1);
41         HAL_GPIO_WritePin(ROW2_GPIO_Port, ROW2_Pin, 0);
42         HAL_GPIO_WritePin(ROW3_GPIO_Port, ROW3_Pin, 1);

```

```

43     HAL_GPIO_WritePin(ROW4_GPIO_Port, ROW4_Pin, 1);
44     HAL_GPIO_WritePin(ROW5_GPIO_Port, ROW5_Pin, 1);
45     HAL_GPIO_WritePin(ROW6_GPIO_Port, ROW6_Pin, 1);
46     HAL_GPIO_WritePin(ROW7_GPIO_Port, ROW7_Pin, 1);
47     displayMatrixRow(matrix_buffer[2]);
48     break;
49 case 3:
50     HAL_GPIO_WritePin(ROW0_GPIO_Port, ROW0_Pin, 1);
51     HAL_GPIO_WritePin(ROW1_GPIO_Port, ROW1_Pin, 1);
52     HAL_GPIO_WritePin(ROW2_GPIO_Port, ROW2_Pin, 1);
53     HAL_GPIO_WritePin(ROW3_GPIO_Port, ROW3_Pin, 0);
54     HAL_GPIO_WritePin(ROW4_GPIO_Port, ROW4_Pin, 1);
55     HAL_GPIO_WritePin(ROW5_GPIO_Port, ROW5_Pin, 1);
56     HAL_GPIO_WritePin(ROW6_GPIO_Port, ROW6_Pin, 1);
57     HAL_GPIO_WritePin(ROW7_GPIO_Port, ROW7_Pin, 1);
58     displayMatrixRow(matrix_buffer[3]);
59     break;
60 case 4:
61     HAL_GPIO_WritePin(ROW0_GPIO_Port, ROW0_Pin, 1);
62     HAL_GPIO_WritePin(ROW1_GPIO_Port, ROW1_Pin, 1);
63     HAL_GPIO_WritePin(ROW2_GPIO_Port, ROW2_Pin, 1);
64     HAL_GPIO_WritePin(ROW3_GPIO_Port, ROW3_Pin, 1);
65     HAL_GPIO_WritePin(ROW4_GPIO_Port, ROW4_Pin, 0);
66     HAL_GPIO_WritePin(ROW5_GPIO_Port, ROW5_Pin, 1);
67     HAL_GPIO_WritePin(ROW6_GPIO_Port, ROW6_Pin, 1);
68     HAL_GPIO_WritePin(ROW7_GPIO_Port, ROW7_Pin, 1);
69     displayMatrixRow(matrix_buffer[4]);
70     break;
71 case 5:
72     HAL_GPIO_WritePin(ROW0_GPIO_Port, ROW0_Pin, 1);
73     HAL_GPIO_WritePin(ROW1_GPIO_Port, ROW1_Pin, 1);
74     HAL_GPIO_WritePin(ROW2_GPIO_Port, ROW2_Pin, 1);
75     HAL_GPIO_WritePin(ROW3_GPIO_Port, ROW3_Pin, 1);
76     HAL_GPIO_WritePin(ROW4_GPIO_Port, ROW4_Pin, 1);
77     HAL_GPIO_WritePin(ROW5_GPIO_Port, ROW5_Pin, 0);
78     HAL_GPIO_WritePin(ROW6_GPIO_Port, ROW6_Pin, 1);
79     HAL_GPIO_WritePin(ROW7_GPIO_Port, ROW7_Pin, 1);
80     displayMatrixRow(matrix_buffer[5]);
81     break;
82 case 6:
83     HAL_GPIO_WritePin(ROW0_GPIO_Port, ROW0_Pin, 1);
84     HAL_GPIO_WritePin(ROW1_GPIO_Port, ROW1_Pin, 1);
85     HAL_GPIO_WritePin(ROW2_GPIO_Port, ROW2_Pin, 1);
86     HAL_GPIO_WritePin(ROW3_GPIO_Port, ROW3_Pin, 1);
87     HAL_GPIO_WritePin(ROW4_GPIO_Port, ROW4_Pin, 1);
88     HAL_GPIO_WritePin(ROW5_GPIO_Port, ROW5_Pin, 1);
89     HAL_GPIO_WritePin(ROW6_GPIO_Port, ROW6_Pin, 0);
90     HAL_GPIO_WritePin(ROW7_GPIO_Port, ROW7_Pin, 1);
91     displayMatrixRow(matrix_buffer[6]);

```

```

92         break;
93     case 7:
94         HAL_GPIO_WritePin(ROW0_GPIO_Port, ROW0_Pin, 1);
95         HAL_GPIO_WritePin(ROW1_GPIO_Port, ROW1_Pin, 1);
96         HAL_GPIO_WritePin(ROW2_GPIO_Port, ROW2_Pin, 1);
97         HAL_GPIO_WritePin(ROW3_GPIO_Port, ROW3_Pin, 1);
98         HAL_GPIO_WritePin(ROW4_GPIO_Port, ROW4_Pin, 1);
99         HAL_GPIO_WritePin(ROW5_GPIO_Port, ROW5_Pin, 1);
100        HAL_GPIO_WritePin(ROW6_GPIO_Port, ROW6_Pin, 1);
101        HAL_GPIO_WritePin(ROW7_GPIO_Port, ROW7_Pin, 0);
102        displayMatrixRow(matrix_buffer[7]);
103        break;
104    default: break;
105    }
106 }
107 int flag9 = 0;
108 int counter9 = 4;
109 void setTimer9(int time){
110     flag9 = 0;
111     counter9 = time / TICK;
112 }
113 void timerRun9(){
114     if(counter9 > 0) {
115         counter9--;
116         if(counter9 == 0) flag9 = 1;
117     }
118 }
119 void ex9(){
120     if(flag9 == 1){
121         updateLEDMatrix(i);
122         if(++i >= 8) i = 0;
123         setTimer9(10);
124     }
125 }
126 int main(void){
127     HAL_Init();
128     SystemClock_Config();
129     MX_GPIO_Init();
130     MX_TIM2_Init();
131     HAL_TIM_Base_Start_IT (& htim2 );
132
133     setTimer9(500);
134     while(1){
135         ex9();
136     }
137 }
138 void HAL_TIM_PeriodElapsedCallback ( TIM_HandleTypeDef *
    htim ){
139     timerRun9();

```

3.10 Exercise 10

Create an animation on LED matrix, for example, the character is shifted to the left. **Report 1:** Briefly describe your solution and present your source code in the report.

The character is shifted to the left each second by moving the bits in each row one position to the left, with the bit that shifts out from the leftmost position wrapping around to the rightmost position.

Timers are used to control the speed of the LED matrix updates and the shifting of the character. Timer 9 is responsible for refreshing the matrix at a constant rate, while Timer 10 manages the shifting of the character. The code continuously checks for the expiration of these timers and performs the appropriate actions when the timers expire.

```

1  int flag10 = 0;
2  int counter10 = 100;
3  void setTimer10(int time){
4      flag10 = 0;
5      counter10 = time / TICK;
6  }
7  void timerRun10(){
8      if(counter10 > 0) {
9          counter10--;
10         if(counter10 == 0) flag10 = 1;
11     }
12 }
13 int i = 0;
14 void ex10(){
15     if(flag9 == 1){
16         updateLEDMatrix(i);
17         if(++i >= 8) i = 0;
18         setTimer9(30);
19     }
20     if(flag10 == 1){
21         setTimer10(800);
22         for(int tmp = 0; tmp < 8; ++tmp){
23             matrix_buffer[tmp] = (matrix_buffer[tmp] >> 1)
24                                     | ((matrix_buffer[tmp]&1) << 7);
25         }
26     }
27 }
28 int main(void){
29     HAL_Init();
30     SystemClock_Config();
31     MX_GPIO_Init();
32     MX_TIM2_Init();

```

```

33     HAL_TIM_Base_Start_IT (& htim2 );
34
35     setTimer9(100);
36     setTimer10(1000);
37     while(1){
38         ex10();
39     }
40 }
41 void HAL_TIM_PeriodElapsedCallback ( TIM_HandleTypeDef *
    htim ){
42     timerRun9();
43     timerRun10();
44 }

```

4 Source code and simulation files

All source code and simulation files are pushed to github.