


E2-EN:P4.28 E1-EN:P4.29 E0-EN:P0.21 Z-EN:P0.19 Y-EN:P0.10 X-EN:P0.4
E2-STEP:P1.21 E1-STEP:P2.8 E0-STEP:P2.3 Z-STEP:P2.2 Y-STEP:P2.1 X-STEP:P2.0
E2-DIR:P1.27 E1-DIR:P2.13 E0-DIR:P0.22 Z-DIR:P0.20 Y-DIR:P0.11 X-DIR:P0.5
E2-CS:P2.11 E1-CS:P2.4 E0-CS:P0.28(电压偏低) Z-CS:P2.12 Y-CS:P2.6 X-CS:P0.17
High-level voltage is too low.

由于该主板设计选型有误，
热床与热端使用电平转换器：CD4504BPWR进行驱动，
这种设计是不符合实际需求的，会导致大功率MOS管无法快速且正常开启，
会造成芯片严重发热，所以不建议使用。

Due to an error in the motherboard's design and component selection,
the heated bed and hotend are driven using CD4504BPWR level shifters;
this design is unsuitable for actual requirements,
as it prevents the high-power MOSFETs from switching on quickly and correctly,
leading to severe overheating of the chip—therefore, its use is not recommended.

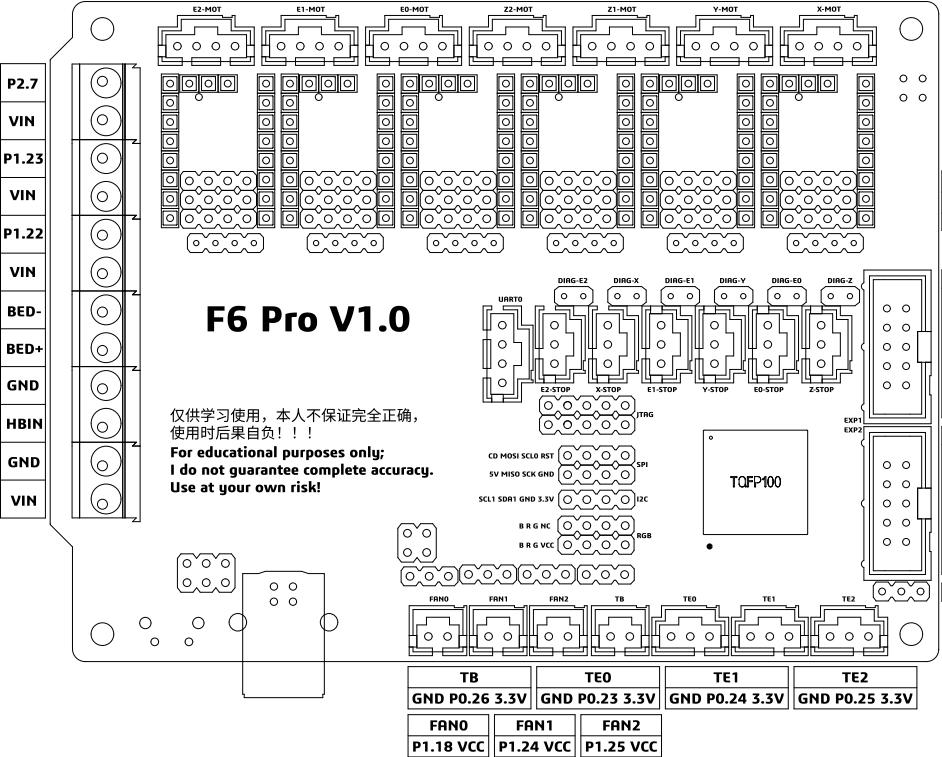

3.3V			
TX	RX	MS2	MS1
MISO	CS	SCK	MOSI
TX	2.33V	CS	

MOT-MISO:P0.8
MOT-SCK:P0.7
MOT-MOSI:P0.9

暂时不清楚2.33V电压用途 The purpose of the 2.33V voltage is currently unclear.

EXP1	EXP1	UART0
BEEP P1.30	P1.31 P1.30	GND
P0.18 P0.16	P0.18 P0.16	5V
P0.15 NC	P0.15 NC	P0.2
NC NC	NC NC	P0.3
5V GND	5V GND	

E2-STOP	X-STOP	E1-STOP	Y-STOP	E0-STOP	Z-STOP
P1.19 GND	P1.20 GND	P1.16 GND	P1.17 GND	P1.15 GND	P1.14(电压偏低) GND
3.3V	3.3V	3.3V	3.3V	3.3V	3.3V

JTAG				IF USE SWD		
RTCK	TDI	TRST	RST	3.3V	TRST	TMS(SWDIO) TCLK(SWDCCLK) GND
NC	TDO	TMS	TCLK	GND		

EXP2	EXP2	EXP2
MISO SCK	P0.8	P0.7
P3.25 P0.6	P3.25	P0.6
P3.26 MOSI	P3.26	P0.9
CD RST	P0.27(电压偏低)	RST
GND NC	GND	NC

SPI			
P0.27(电压偏低)	P0.9	P0.6	RST
5V	P0.8	P0.7	GND

I2C
P0.1 P0.0 GND 3.3V

RGB
P1.29 P1.28 P1.26 NC
P1.29 P1.28 P1.26 VCC

GND BOOT 3.3V/GND P2.10 3.3V

TB	TE0	TE1	TE2
GND P0.26 3.3V	GND P0.23 3.3V	GND P0.24 3.3V	GND P0.25 3.3V
FAN0	FAN1	FAN2	
P1.18 VCC	P1.24 VCC	P1.25 VCC	