



# INSTALLING COMPONENTS

We recommend to install the components in the following order:

1. Diodes
2. Jumpers
3. Resistors
4. IC Sockets
5. Ceramic Capacitors
6. Film Capacitors
7. Tantalum Capacitors
8. Electrolytic Capacitors
9. Transistors
10. Connectors
11. Cleaning
11. Polystyrene Capacitors
12. Potentiometers, Trimpot and switches

# MAIN BOARD. DIODES


Install 95 x 1N4148 diodes on main board.  
Then solder them and cut legs and save  
them. You will use them later.

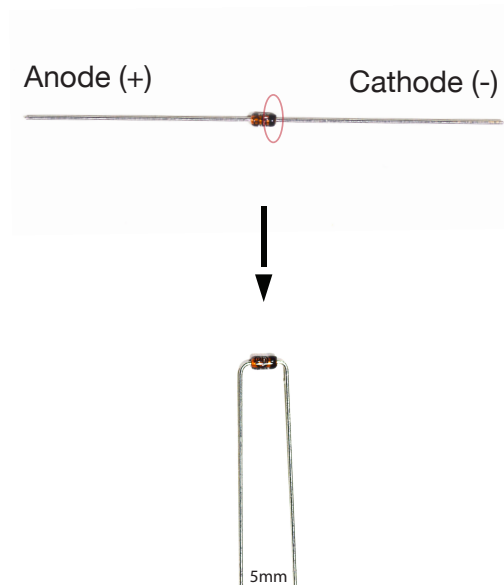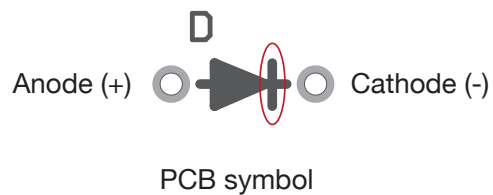


More information about Diodes  
<https://en.wikipedia.org/wiki/Diode>

# JUMPERS

Use diodes legs for jumpers. Just bend them with pitch 10mm.  
You will need 54 jumpers.


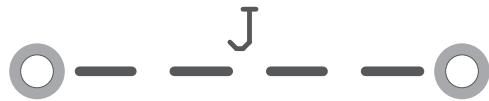


PCB symbol




# MAIN BOARD. RESISTORS

SR-909 boards designed for 5mm resistors but you can use bigger size. Start from 22ohm and pass all values. Total 38 values and 493 resistors. R231 not install. Check every resistor with DMM before install.

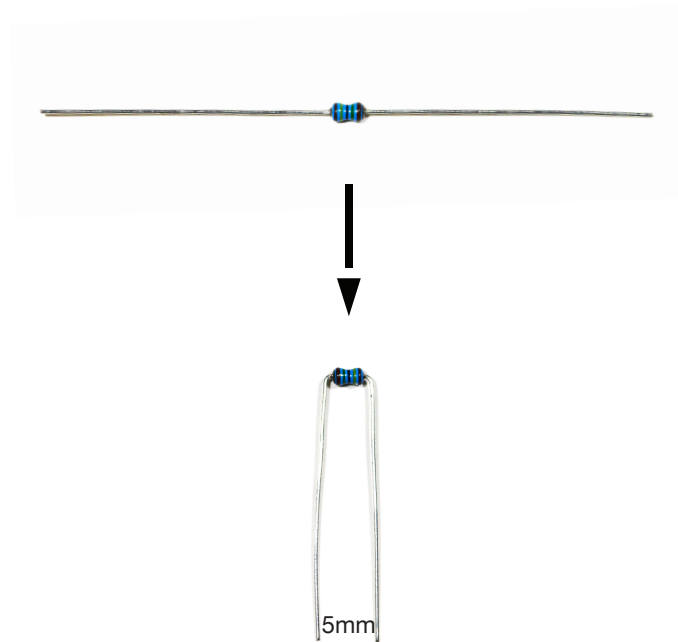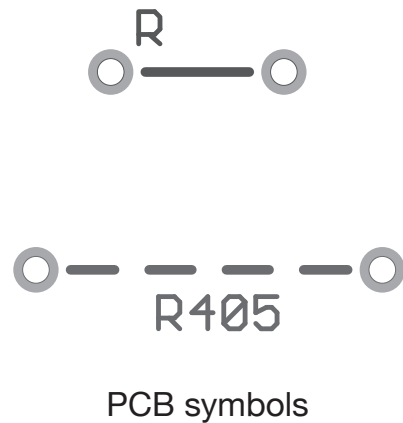

More information about Resistors  
<https://en.wikipedia.org/wiki/Resistor>


# SR-909 FULL WIRING DIAGRAM

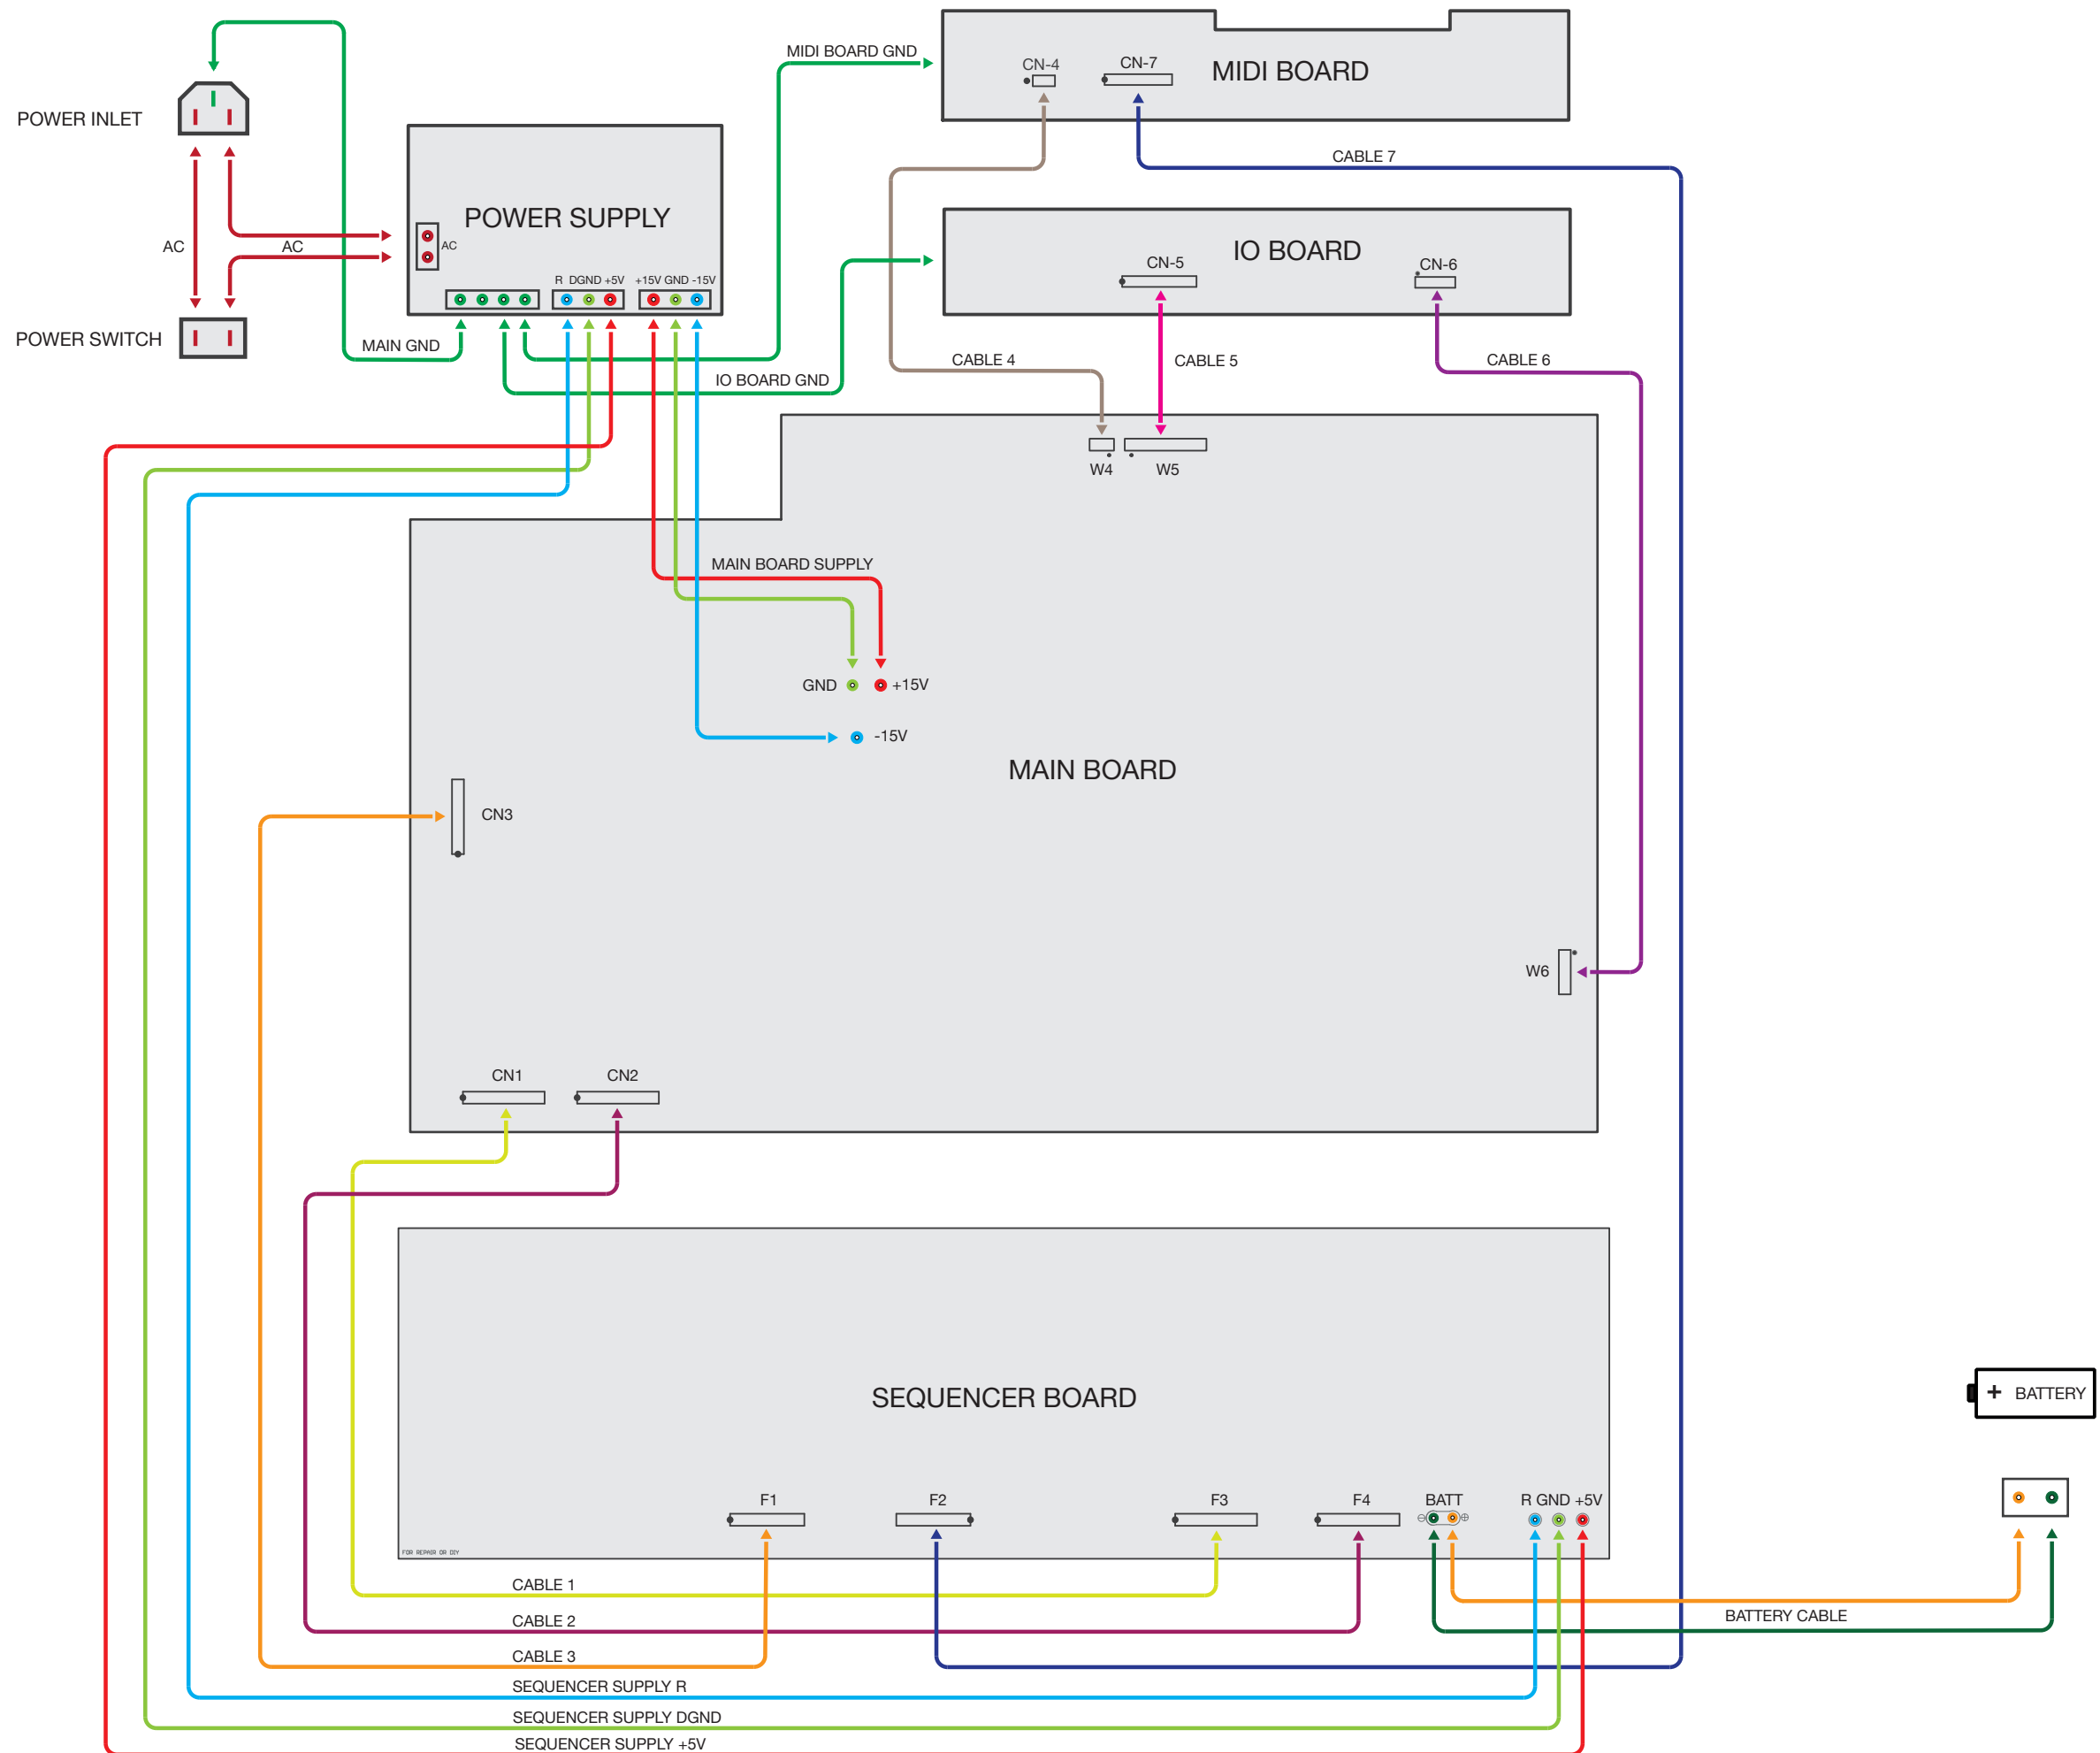

# SR-909 CABLE 1

CN-1 MAIN BOARD


0,35MM or 22AWG  
Length 30CM

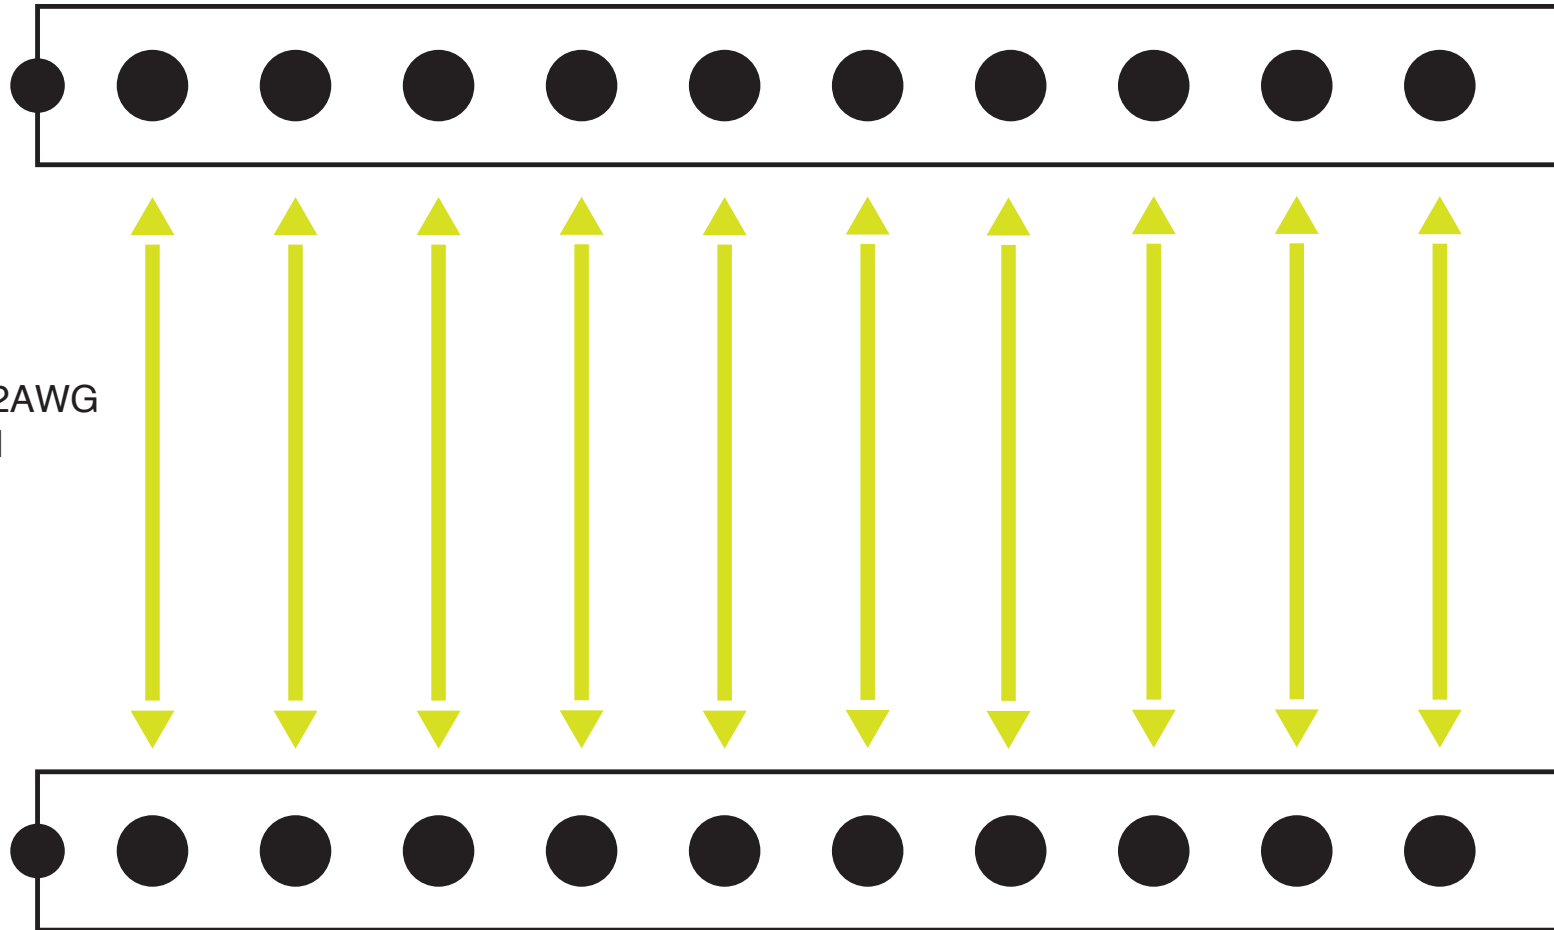



F3 SEQ BOARD

# SR-909 CABLE 2

CN-2 MAIN BOARD

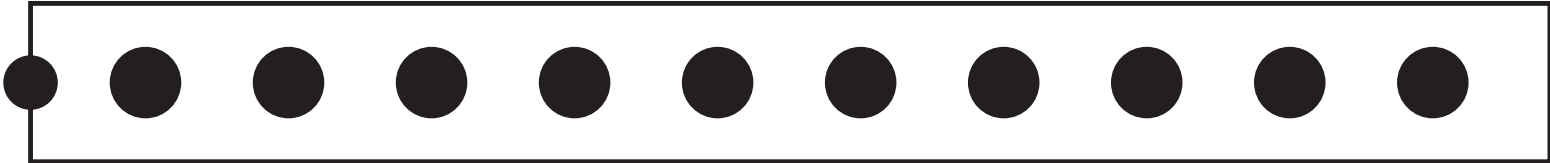

0,35MM or 22AWG  
Length 30CM

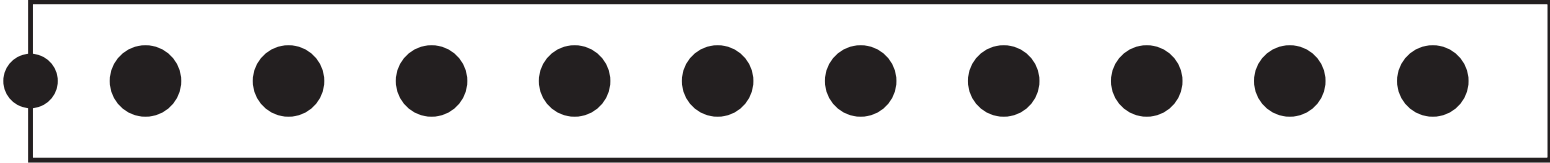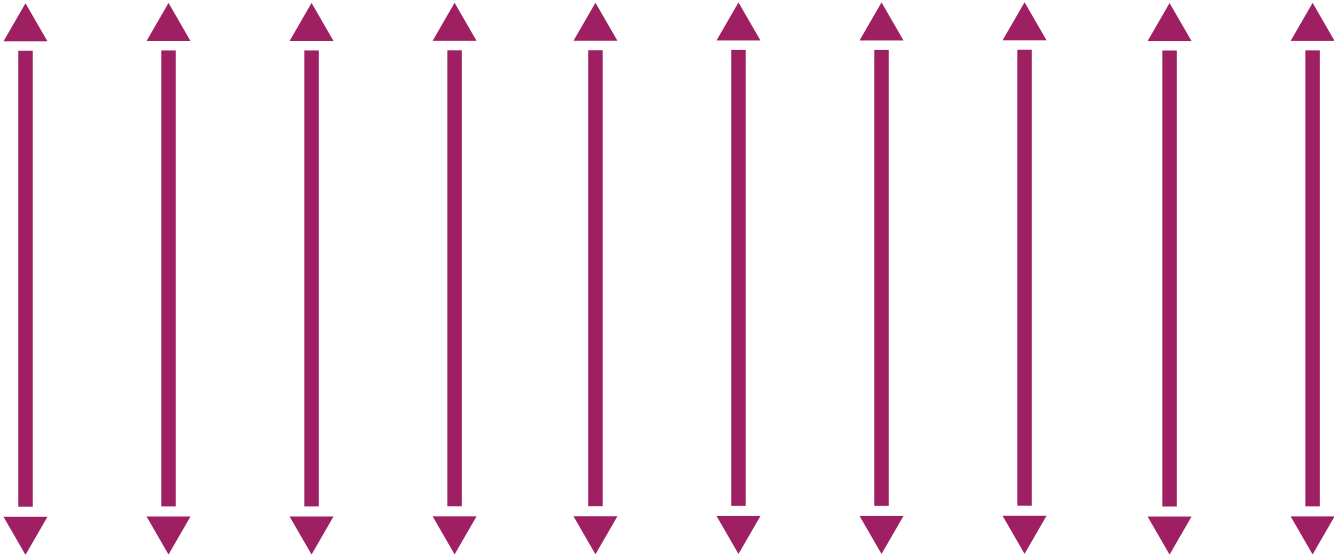


F4 SEQ BOARD

# SR-909 CABLE 3

CN-3 MAIN BOARD

0,35MM or 22AWG  
Length 25CM

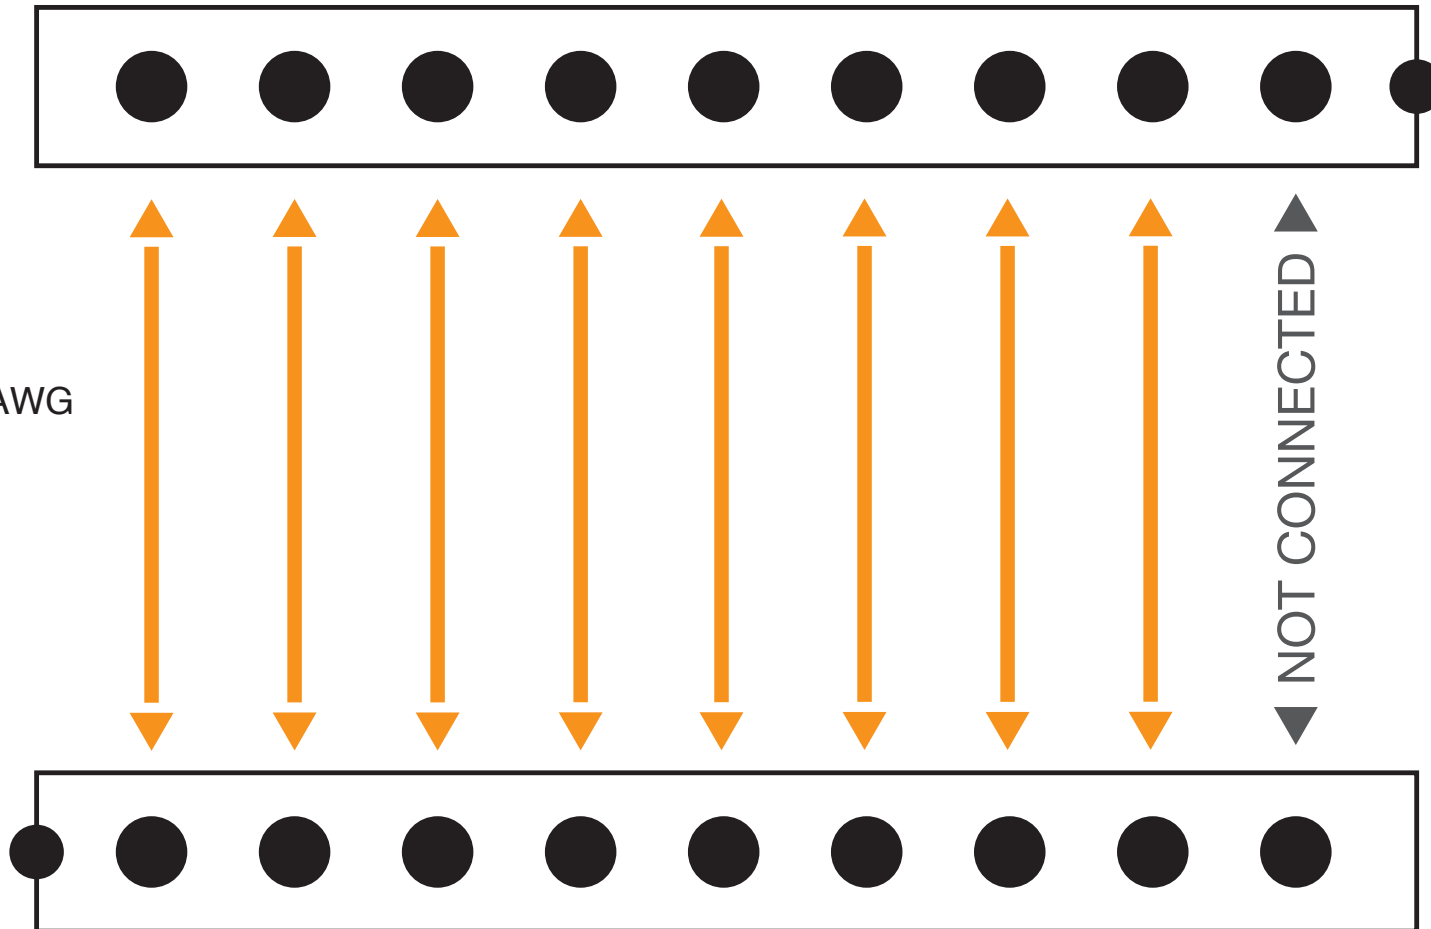


F1 SEQ BOARD V.1





# SR-909 CABLE 3

CN-3 MAIN BOARD

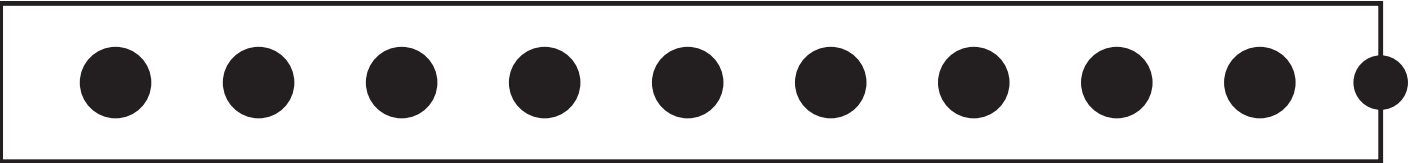


0,35MM or 22AWG  
Length 25CM

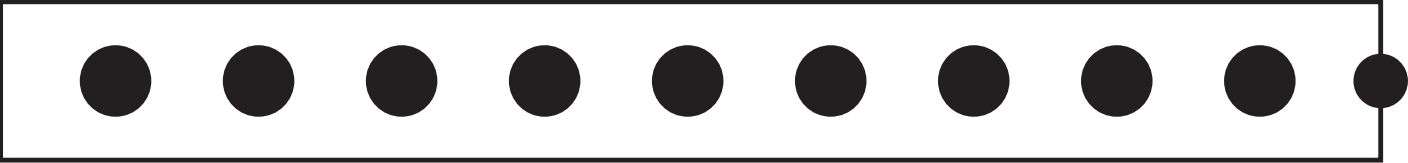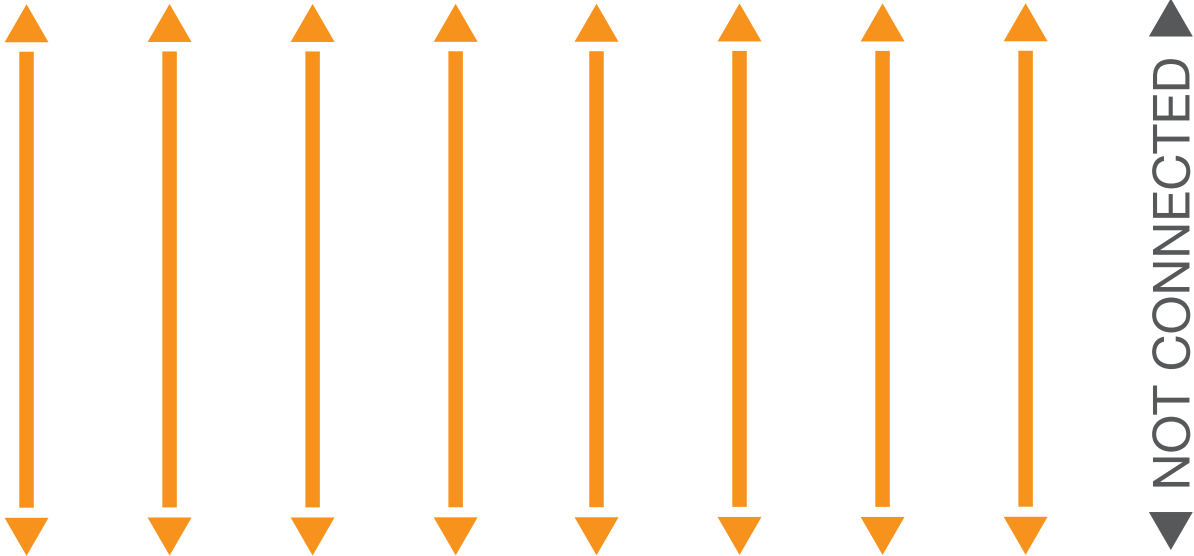



F1 SEQ BOARD V.1.1-1.2

# SR-909 CABLE 4

CN-4 MIDI BOARD V1-1.1

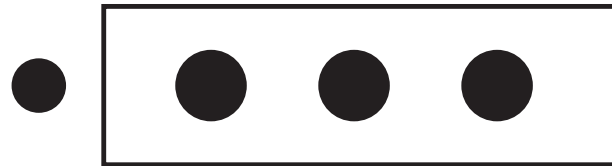


0,35MM or 22AWG  
Length 15CM

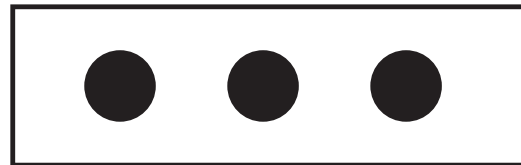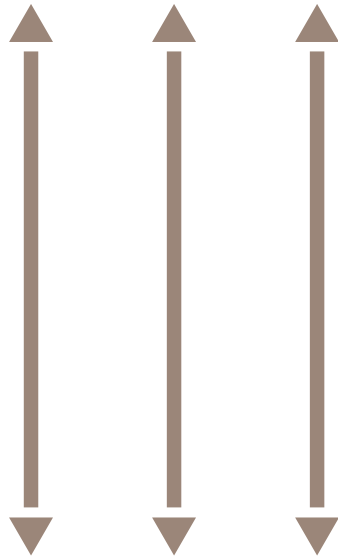


W4 MAIN BOARD

# SR-909 CABLE 4

CN-4 MIDI BOARD V.1.2

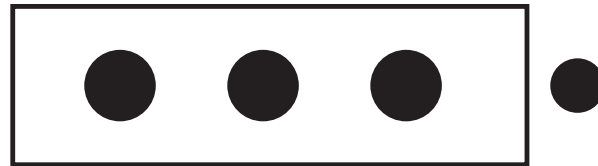


0,35MM OR 22AWG  
Length 15CM

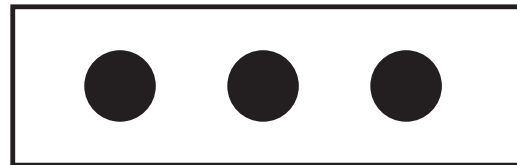



W4 MAIN BOARD

# SR-909 CABLE 5

CN-5 IO BOARD

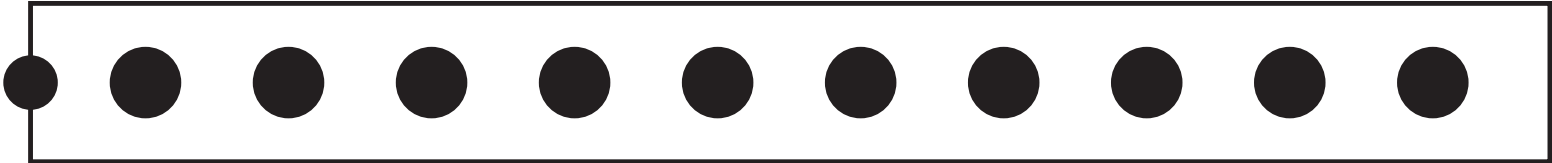


0,35MM or 22AWG  
Length 15CM

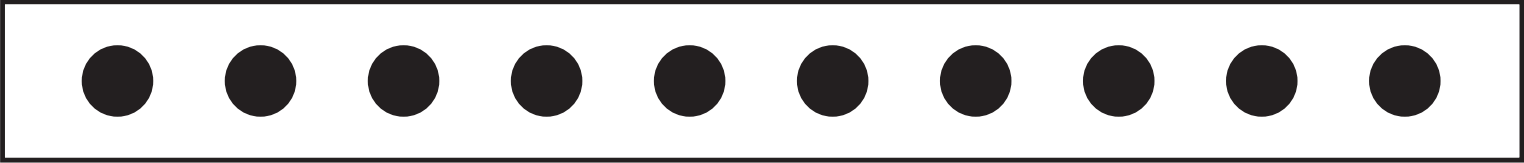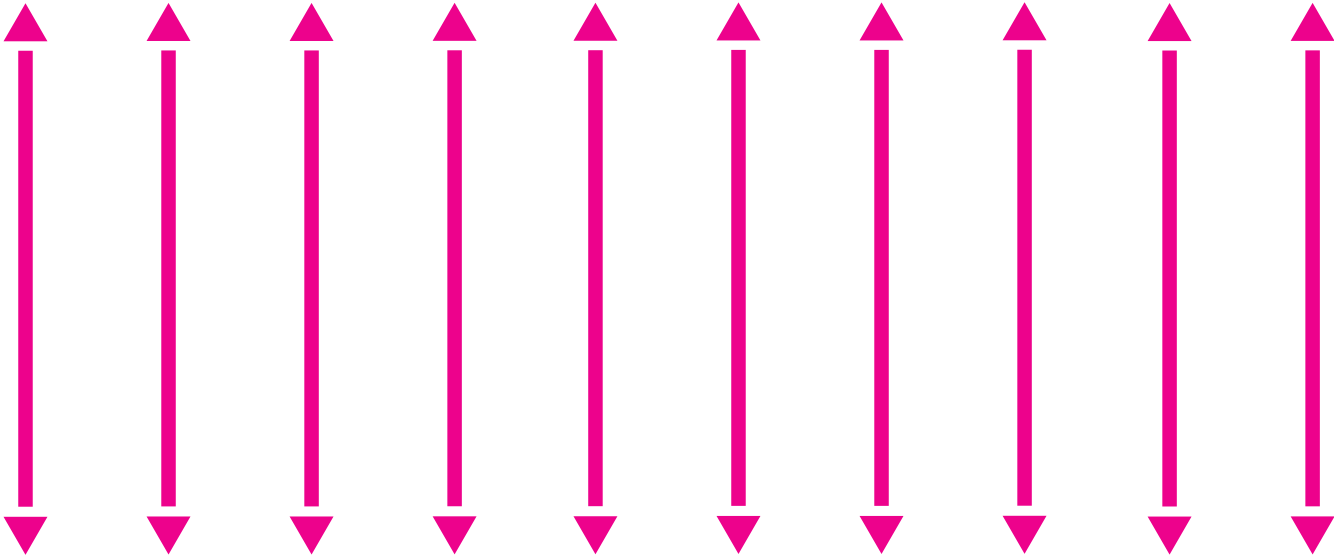


W-5 MAIN BOARD

# SR-909 CABLE 6

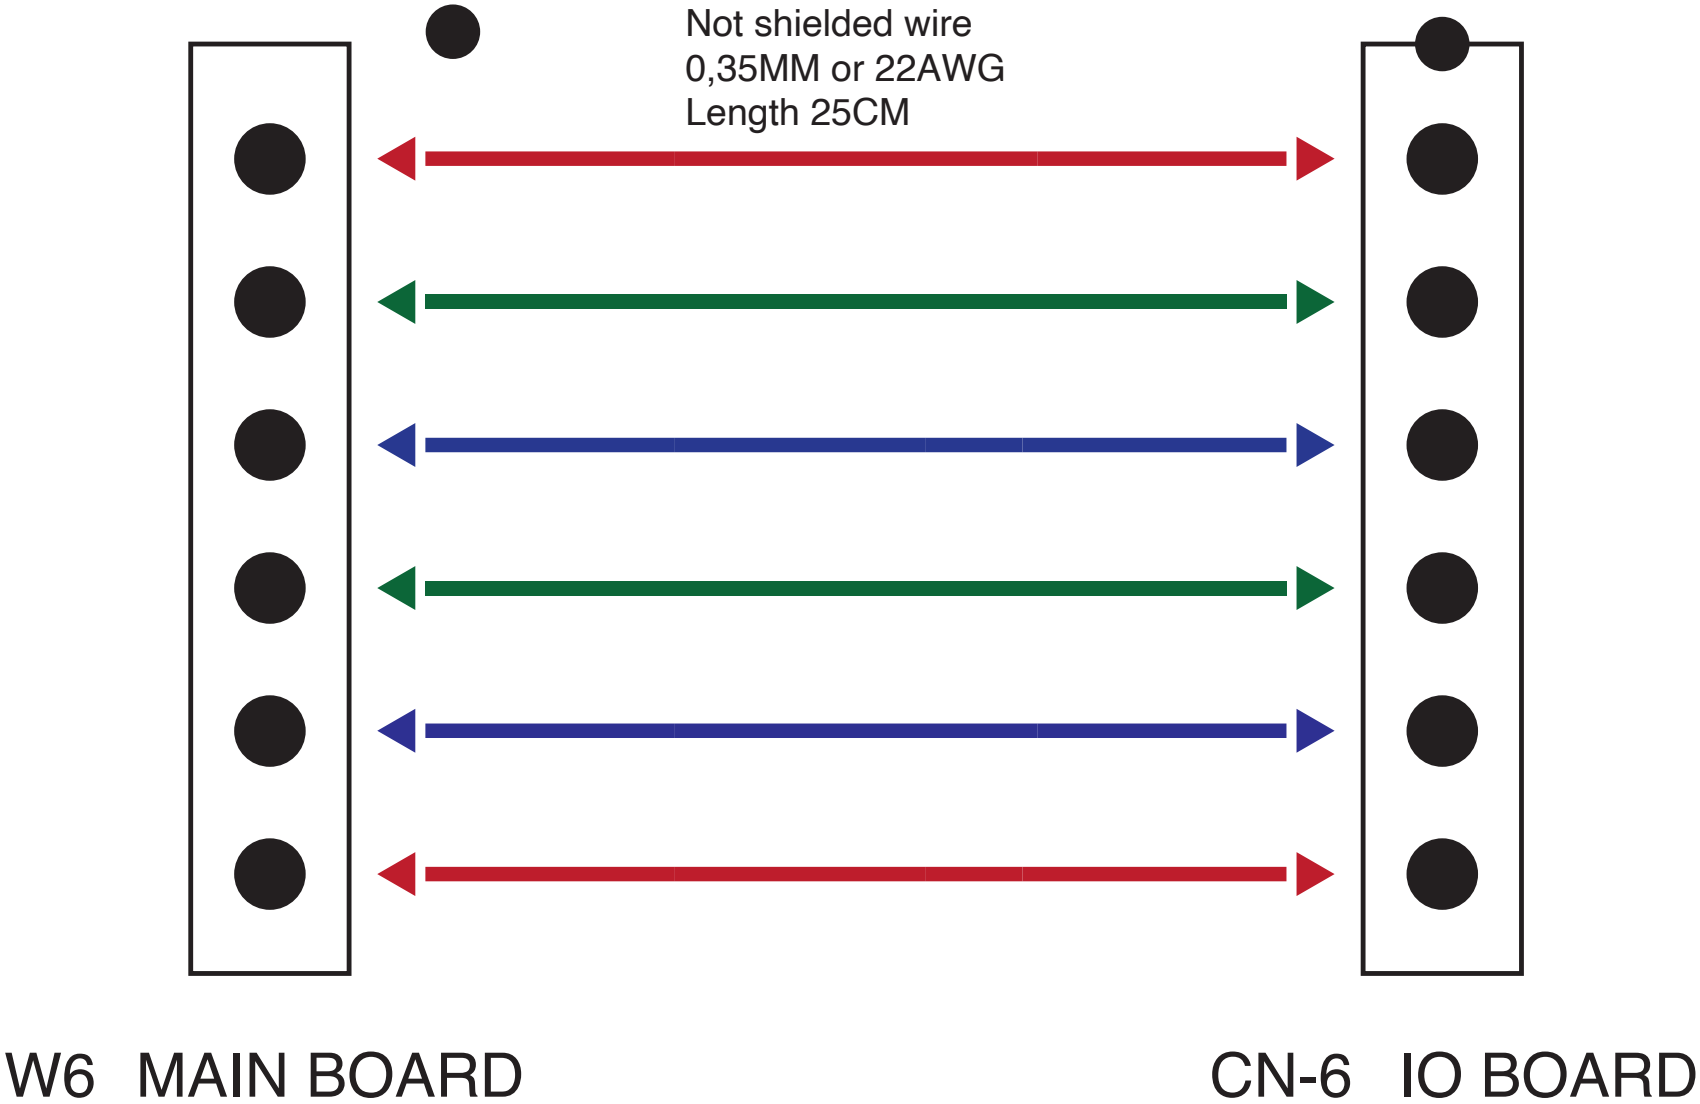


# SR-909 CABLE 6

Shielded cable  
0,35MM or 22AWG  
Length 30CM  
Green as shield conductor


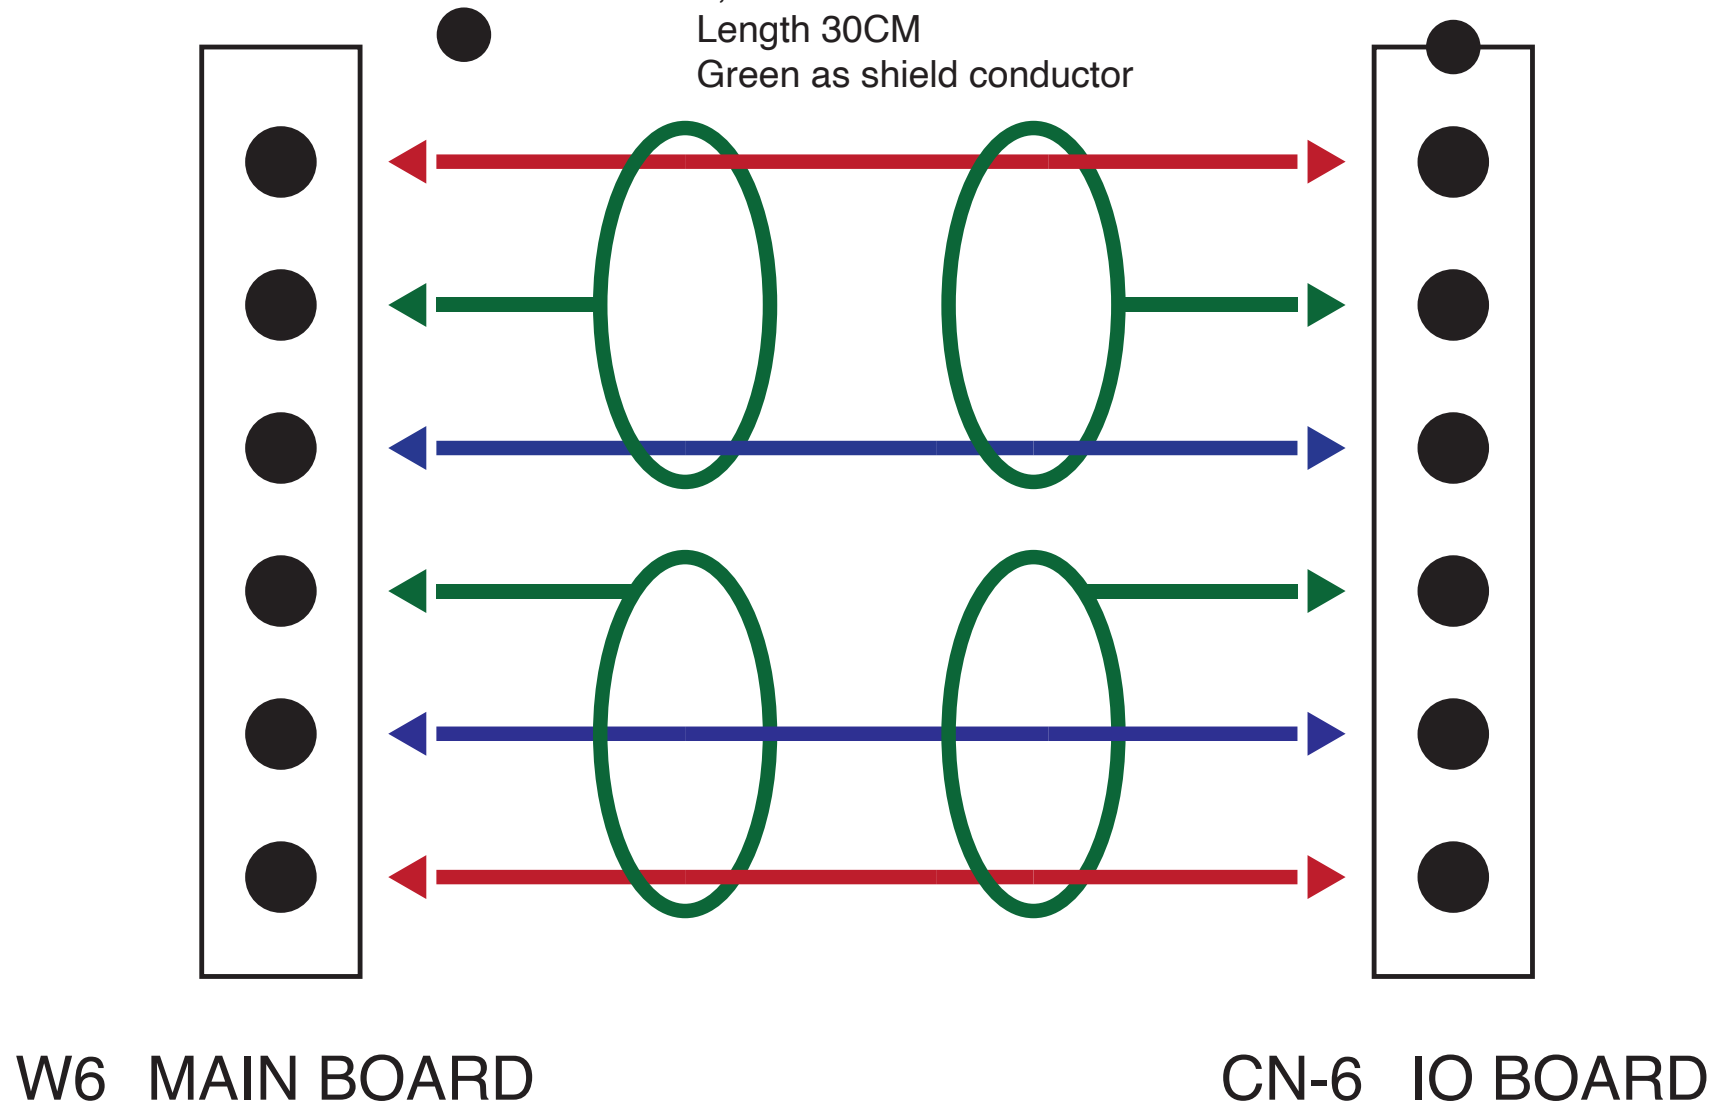


# SR-909 CABLE 7

CN-7 MIDI BOARD

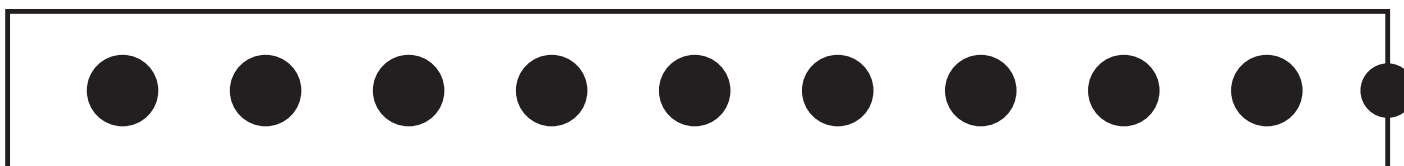

0,35MM or 22AWG  
Length 30CM

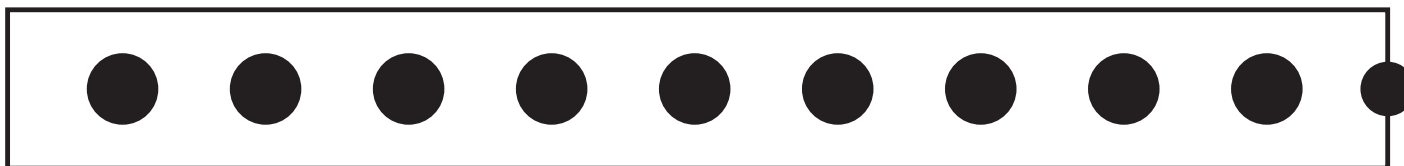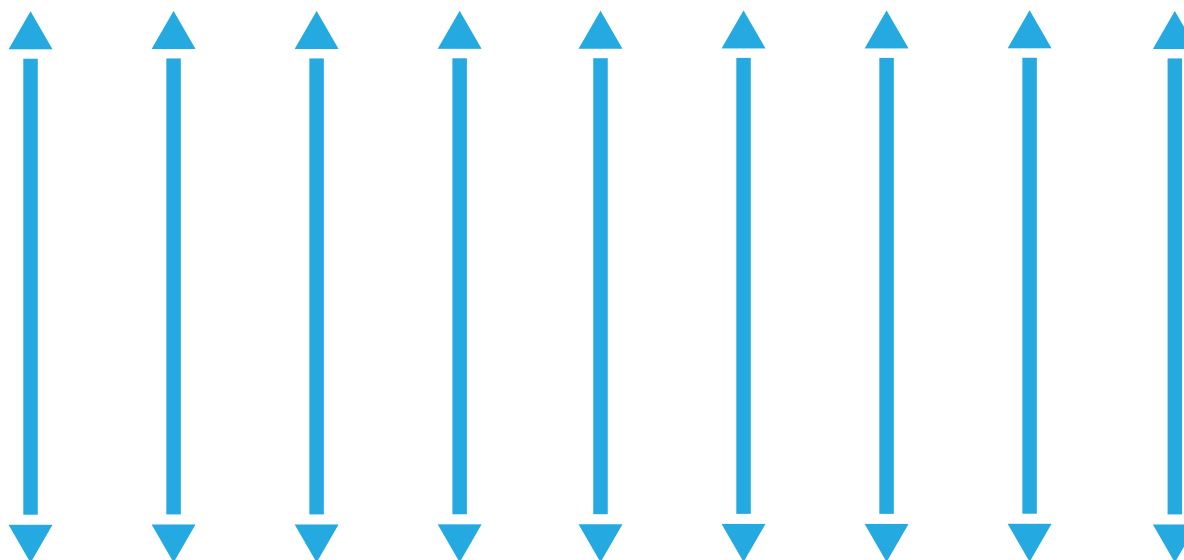

F2 SEQ BOARD