

[19] Sensing - Battery

DESIGN NOTE:
Battery voltage sensing divider for 2S LiPo battery.


R1 = 100kΩ (Top)
R2 = 47kΩ (Bottom)

Divider Ratio:
 $V_{ADC} = V_{BAT} \times (47 / (100 + 47))$
 $V_{ADC} = V_{BAT} \times 0.3197$

2S LiPo:
Max battery voltage (8.4V): 2.69 V
Nominal voltage (7.4V): 2.37 V
Low battery voltage (6.4V): 2.05 V
Cutoff voltage (6.0V): 1.92 V

Maximum divider current:
 $I = 8.4V / 147k\Omega = 57 \mu A$

Notes:
- Designed for 3.3V ADC input.
- Add 100nF capacitor at ADC input for noise filtering.
- Use 1% resistors or better.
- Use low temperature coefficient resistors ($\leq 100 \text{ ppm}/^\circ\text{C}$) for improved measurement accuracy.

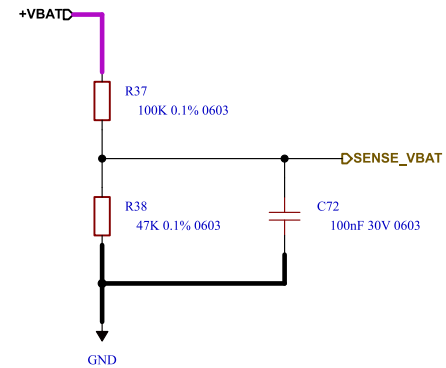

Battery Voltage Sensing

Comments:	Company: Willas 威倫電子股份有限公司 Willas Electronic Corp.		Variant: DRAFT		Git Hash: c99a2fe
	Board Name: Motor Control Board		Project Name: Master Hand		
Sheet Title:	File Name: Sensing - Battery.kicad_sch	Designer: Damon	Date: 2026-06-27	Revision: + (Unreleased)	
Sheet Path: /Project Architecture/Sensing - Battery/		Reviewer:	Size: A4	Sheet: 19 of 23	