

MODEL 705-1A MICRO FACE (cont.)

PARALLEL INPUT (Cont.)

One 7-digit number has now been transferred from the outside device into the display register of the programmable calculator.

This procedure is repeated for each new number. Transfer time of each 7-digit number is approximately 5 milliseconds.

CAUTION: *A number that has been read into the display register must be moved to another location within the calculator prior to reading in another number, otherwise the first number will be lost.*

INTERCONNECTING CABLE

A six-foot cable is provided with each micro face. Attached to one end of this cable is a 36-pin Amphenol male connector (Amphenol P/N 57-30360, Wang Labs, Inc., P/N 350-2025), which plugs into the micro face female connector marked "Input." The other end of the cable is open-ended to allow the user to attach any type of mating connector required for his own outside device. (This connector is usually available from the equipment manufacturer of the outside device.) If any questions arise, please do not hesitate to contact Wang Laboratories, Inc. in Tewksbury, Mass. for wiring diagram assistance.

NOTE: *These specifications are subject to change without notice.*

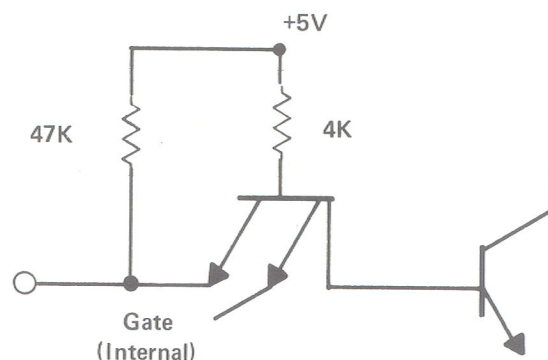


FIGURE 1 Typical Input Circuit

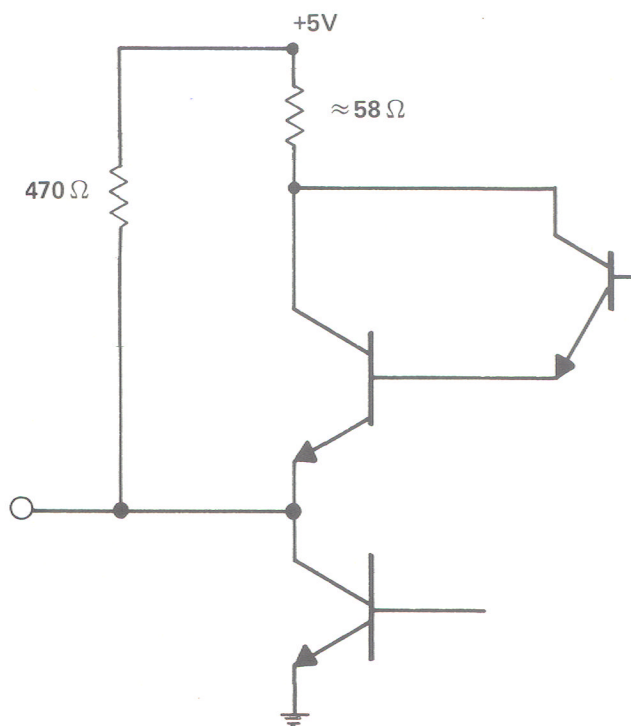


FIGURE 2 Typical Output "Execute" Circuit