


Pinouts

Pin assignments and wiring diagrams for the connector and comms cables used on glider systems. Use these when building, testing, or troubleshooting a cable.

IE55

Seaglider Comms Cable Pinout

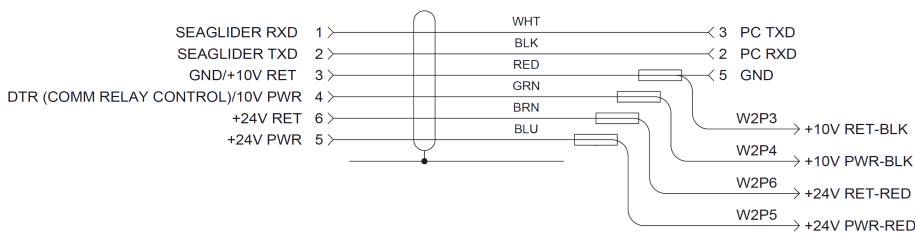

IE55 pin	Signal	Wire colour	Destination
1	SEAGLIDER RXD	WHT	PC TXD (pin 3)
2	SEAGLIDER TXD	BLK	PC RXD (pin 2)
3	GND / +10 V RET	RED	GND (pin 5)
4	DTR (comm relay control) / 10 V PWR	GRN	—
5	+24 V PWR	BLU	W2P4 +10 V PWR-BLK / W2P5 +24 V PWR-RED
6	+24 V RET	BRN	W2P3 +10 V RET-BLK / W2P6 +24 V RET-RED