

$$L_c = 0.1 \text{ dB}$$

$$\text{Stop Band} = 5 \text{ GHz} - 30 \text{ dB}$$

$$Z_0 = 50 \text{ ohm}$$

$$f_c = 2.5 \text{ GHz}$$

$$f_s = 5.0 \text{ GHz}$$

$$n = 2$$


$$L_s = 30 \text{ dB}$$

$$F_0 = 10^{L_c/10} - 1 = 0.02329$$

$$L_s \leq 10 \log_{10} (1 + F_0 \cosh^2 (n \cosh^{-1} (L)))$$

$$n \approx 4.52$$

$$n = 5$$

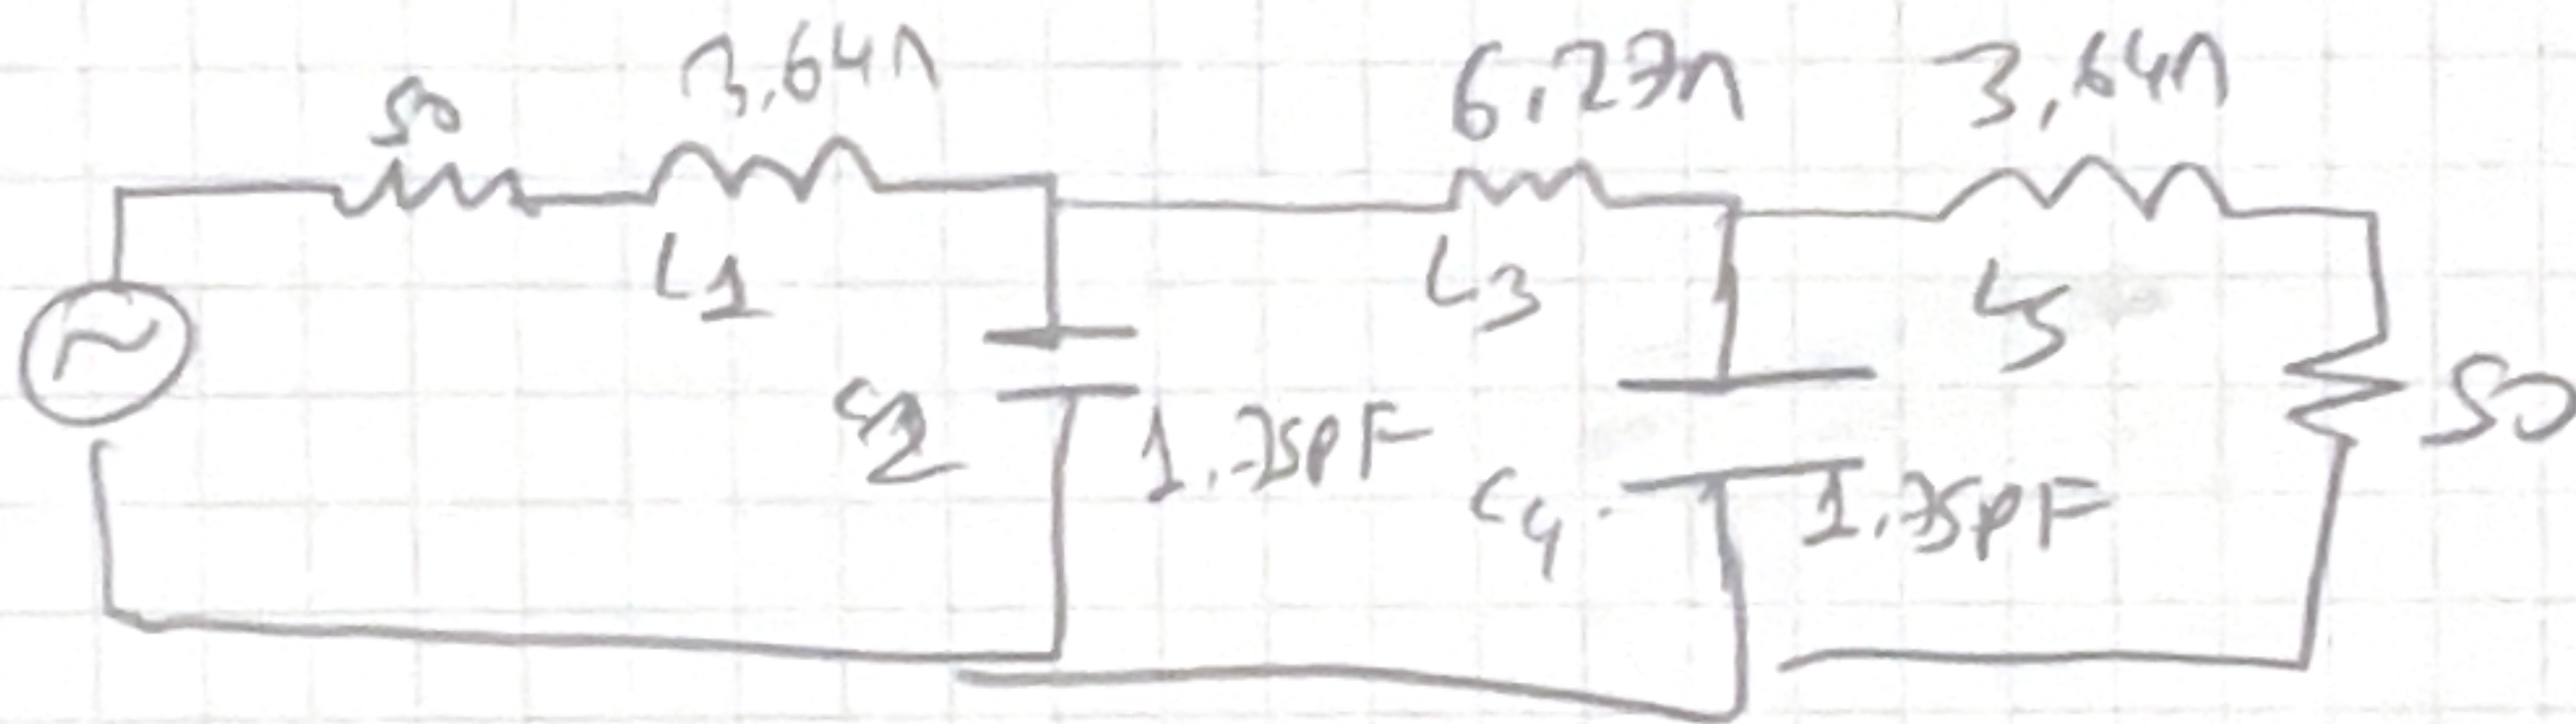

$$F_1 = \frac{1}{n} \ln \left\{ \cosh \left(\frac{L_c}{17.32} \right) \right\} = 1.289$$

$$F_2 = \sinh \left(\frac{2F_1}{n} \right) = 0.540$$

$$a_1 = 0.618$$

$$a_2 = 1.618$$

$$a_3 = 2.0$$

$$b_1 = 0.637$$

$$b_2 = 1.191$$

$$g_0 = 1$$

$$g_6 = 1$$

$$g_1 = \frac{a_1}{F_2} = 1.44$$

$$g_2 = 1.373$$

$$g_3 = 1.92$$

$$g_4 = 1.373$$

$$g_5 = 1.144$$

$$L_1 = L_5 = 3.64 \text{ nH}$$

$$L_3 = 6.23 \text{ nH}$$