




U_TN-Screen-Sheet
TN-Screen-Sheet.SchDot
3V3
GND
3V3
GND
CS_TN
DAT_TN
RD_TN
WR_TN
U_Controller-Sheet
Controller-Sheet.SchDot
+5V
VBAT
GND
3V3
+5V
VBAT
GND
3V3
CS_TN
DAT_TN
RD_TN
WR_TN
USB_PRGM
DRDY
I2C_PORT
SPI_PORT
HOLD
WP
U_Sensor-Sheet
Sensor-Sheet.SchDot
3V3
GND
3V3
GND
DRDY
I2C_PORT
U_EPROM-Sheet
EPROM-Sheet.SchDot
SPI_PORT
HOLD
WP
3V3
GND
3V3
GND
U_Power-Sheet
Power-Sheet.SchDot
+5V
GND
3V3
VBAT
+5V
GND
USB_PRGM
3V3
VBAT

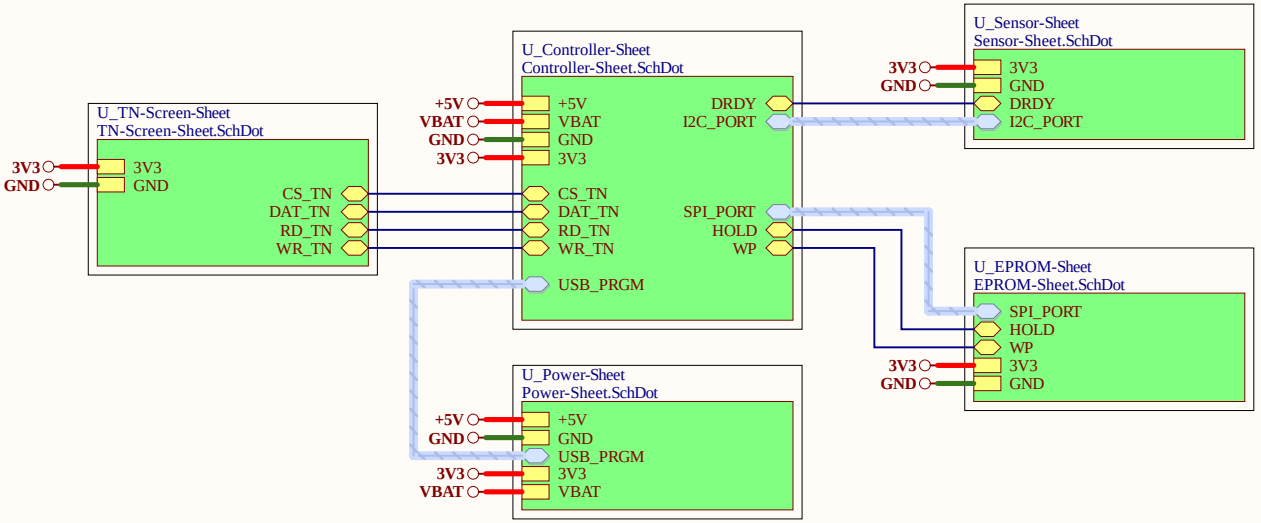

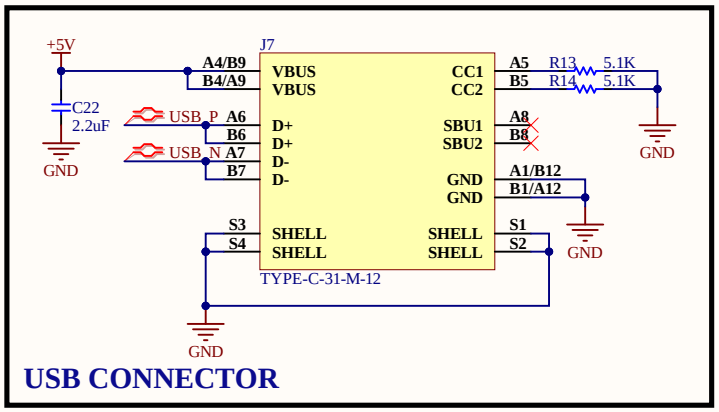

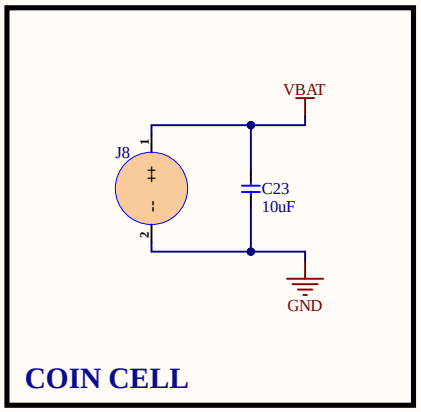

USB

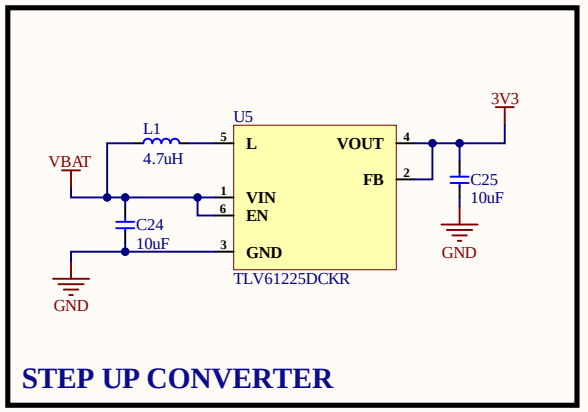





eSpark Consulting Group

Title: Power-Sheet.SchDot

File: Basic Datalogger.PrjPcb

Date: 01-Sep-23	Page Num: 2
Drawn By: Huzaifa Ali	Page Total: 6

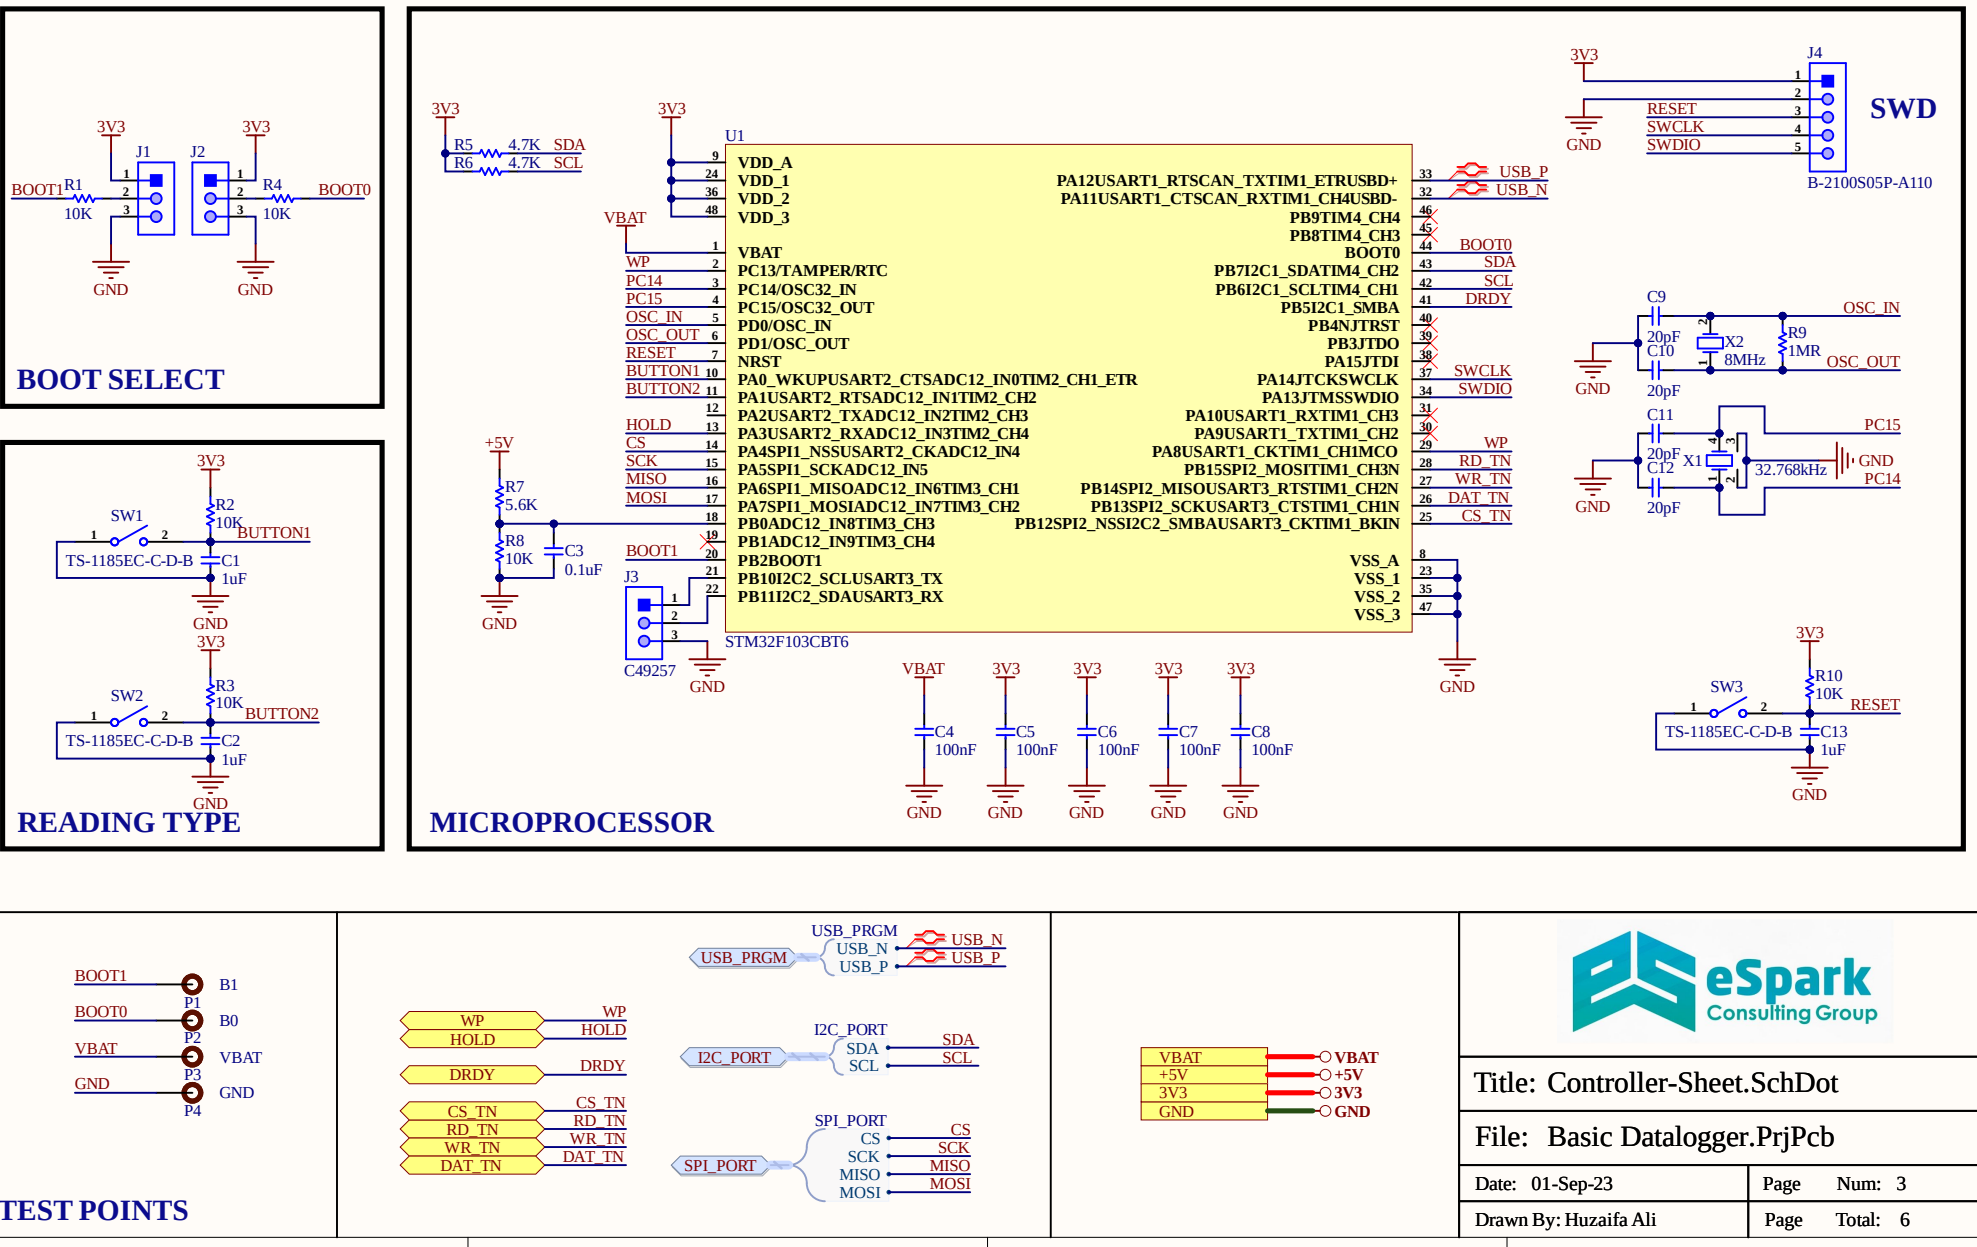

BOOT SELECT
3V3
J1
J2
BOOT1
R1
10K
R4
10K
BOOT0
GND
READING TYPE
SW1
SW2
R2
R3
BUTTON1
BUTTON2
TS-1185EC-C-D-B
C1
C2
1uF
MICROPROCESSOR
U1
STM32F103CBT6
R5
R6
4.7K
SDA
SCL
VBAT
WP
PC14
PC15
OSC_IN
OSC_OUT
RESET
BUTTON1
BUTTON2
HOLD
CS
SCK
MISO
MOSI
BOOT1
+5V
R7
5.6K
R8
10K
C3
0.1uF
J3
C49257
VDD_A
VDD_1
VDD_2
VDD_3
PC13/TAMPER/RTC
PC14/OSC32_IN
PC15/OSC32_OUT
PD0/OSC_IN
PD1/OSC_OUT
NRST
PA0_WKUPUSART2_CTSADC12_IN0TIM2_CH1_ETR
PA1USART2_RTSADC12_IN1TIM2_CH2
PA2USART2_TXADC12_IN2TIM2_CH3
PA3USART2_RXADC12_IN3TIM2_CH4
PA4SPI1_NSSUSART2_CKADC12_IN4
PA5SPI1_SCKADC12_IN5
PA6SPI1_MISOADC12_IN6TIM3_CH1
PA7SPI1_MOSIADC12_IN7TIM3_CH2
PB0ADC12_IN8TIM3_CH3
PB1ADC12_IN9TIM3_CH4
PB2BOOT1
PB10I2C2_SCLUSART3_TX
PB11I2C2_SDAUSART3_RX
PA12USART1_RTSCAN_TXTIM1_ETRUSBD+
PA11USART1_CTSCAN_RXTIM1_CH4USBD-
PB9TIM4_CH4
PB8TIM4_CH3
BOOT0
PB7I2C1_SDATIM4_CH2
PB6I2C1_SCLTIM4_CH1
PB5I2C1_SMBA
PB4NJTRST
PB3JTDO
PA15JTDI
PA14JTCKSWCLK
PA13JTMSSWDIO
PA10USART1_RXTIM1_CH3
PA9USART1_TXTIM1_CH2
PA8USART1_CKTIM1_CH1MCO
PB15SPI2_MOSITIM1_CH3N
PB14SPI2_MISOUSART3_RTSTIM1_CH2N
PB13SPI2_SCKUSART3_CTSTIM1_CH1N
PB12SPI2_NSSI2C2_SMBAUSART3_CKTIM1_BKIN
VSS_A
VSS_1
VSS_2
VSS_3
USB_P
USB_N
DRDY
SWCLK
SWDIO
C4
C5
C6
C7
C8
100nF
SWD
J4
B-2100S05P-A110
RESET
SWCLK
SWDIO
C9
C10
20pF
X2
8MHz
R9
1MR
OSC_IN
OSC_OUT
C11
C12
X1
32.768kHz
PC15
PC14
SW3
R10
10K
RESET
C13
1uF
TEST POINTS
BOOT1
BOOT0
VBAT
GND
P1
P2
P3
P4
B1
B0
USB_PRGM
I2C_PORT
SPI_PORT
CS_TN
RD_TN
WR_TN
DAT_TN
+5V
3V3
Title: Controller-Sheet.SchDot
File: Basic Datalogger.PrjPcb
Date: 01-Sep-23
Page Num: 3
Drawn By: Huzaifa Ali
Page Total: 6
eSpark
Consulting Group

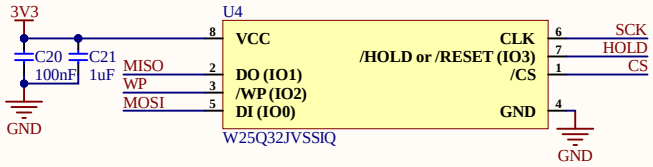

EPROM










eSpark Consulting Group

Title: EPROM-Sheet.SchDot	
File: Basic Datalogger.PrjPcb	
Date: 01-Sep-23	Page Num: 4
Drawn By: Huzaifa Ali	Page Total: 6

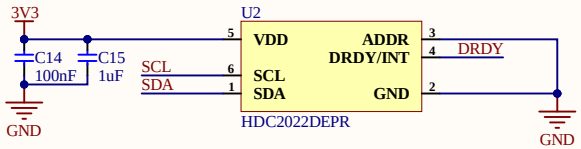

TEMPERATURE & HUMIDITY SENSOR








eSpark Consulting Group

Title: Sensor-Sheet.SchDot	
File: Basic Datalogger.PrjPcb	
Date: 01-Sep-23	Page Num: 5
Drawn By: Huzaifa Ali	Page Total: 6

PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
COM0	COM0	-	-	-	1D	P1	2D	P2	3D	P3	4D	°C	5D	S1	6D	P4	7D	%	S6	S5
COM1	-	COM1	-	-	1E	1C	2E	2C	3E	3C	4E	4C	5E	5C	6E	6C	7E	7C	S9	S4
COM2	-	-	COM2	-	1G	1B	2G	2B	3G	3B	4G	4B	5G	5B	6G	6B	7G	7B	S8	S3
COM3	-	-	-	COM3	1F	1A	2F	2A	3F	3A	4F	4A	5F	5A	6F	6A	7F	7A	S7	S2

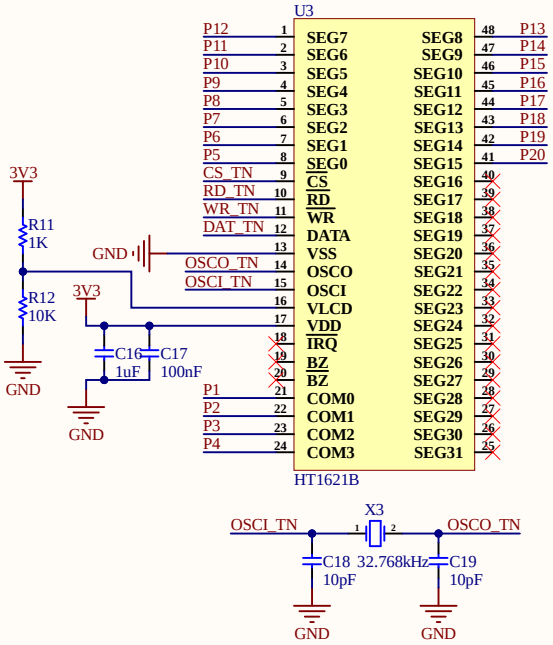

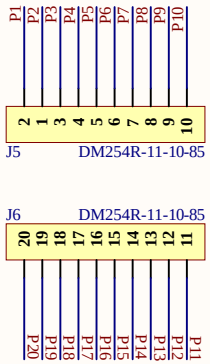

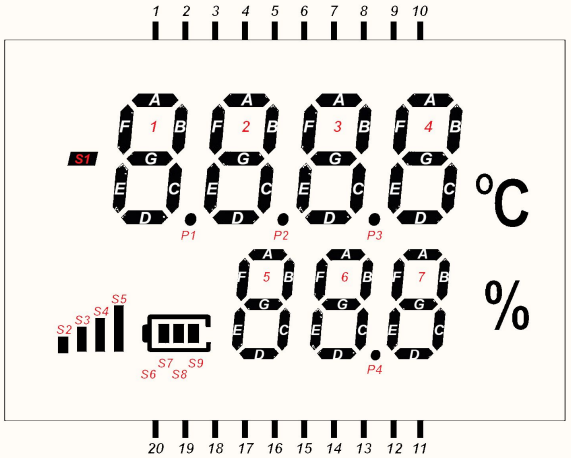



TN SCREEN

The combination of display is given on the table above.
Use COM ports in combination with pins to print specific digit.

For Example
> if we want to print "1" on first digit, the combination will be like this.
1B & 1C, so according to table pull down COM1 & COM2 and pull up pin 6.

> If we want to print %, pull down COM1 and pull up pin 18.





eSpark Consulting Group

Title: TN-Screen-Sheet.SchDot	
File: Basic Datalogger.PrjPcb	
Date: 01-Sep-23	Page Num: 6
Drawn By: Huzaifa Ali	Page Total: 6