

Redmi note10 starts to display the battery icon (battery detection line is disconnected)

This case is provided by Xunwei

Faulty model: Redmi note10

Fault phenomenon: boot to display the battery icon

Repair process: Receive a machine sent by a customer for repair, the model is Redmi note10, the fault isThe boot shows that the battery icon does not enter the system.。




Redmi Note 10 Power-on Display Battery Icon Figure 1

First of all, we thought of the battery loss. We plugged the mobile phone into the charger and charged it for a long time, so we removed the motherboard for detection and measured the battery voltage of 4.36V, indicating that there is no problem with the battery.



Redmi note10 power-on display battery icon Figure 2

Open the drawing to find the battery seat, measure the battery detection foot, and find that the resistance value of the battery detection foot is normal, but the positive electrode of the battery is sent to the power supply for testing. The measured capacitor c1302 to the positive electrode of the battery is not connected, indicating that the line is disconnected, fly the root line directly to this capacitor, and

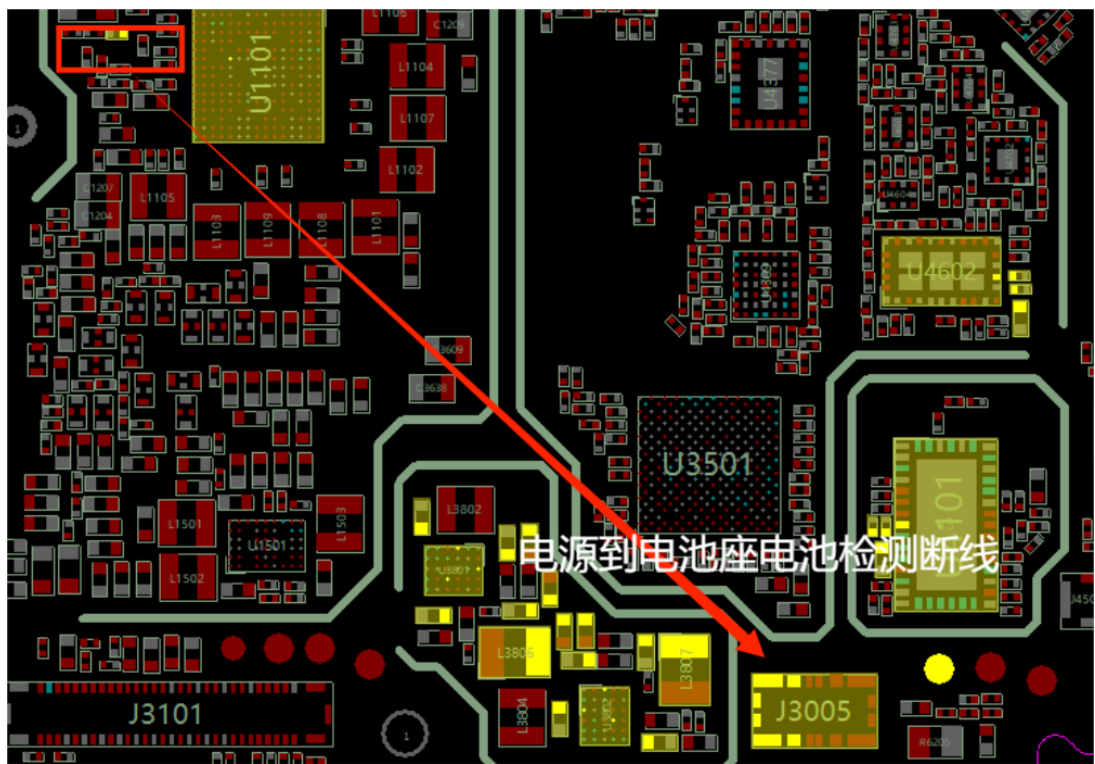

Redmi note10 boot display battery icon Figure 3

Repair results: The motherboard is installed in the shell, and the mobile phone can be turned on normally. The WiFi Bluetooth, sound, charging, fingerprint, photography, phone calls and other functions of the mobile phone are normal. The repair is over.



Redmi note10 boot display battery icon Figure 4