

Middle East Technical University

Department of Electrical and Electronics Engineering

EE568 – Selected Topics in Electrical Machines

Project 2: Motor Winding Design & Analysis

Author: Elif Topaloğlu

Date: May 27, 2026

GitHub Repository:

<https://github.com/odtu/EE568/tree/master/Project2>

Contents

1	Introduction	2
2	Q1: Integral-Slot Winding Design	2
2.1	Configuration A: Full-Pitched Winding	2
2.1.1	Winding Diagram	2
2.1.2	Winding Factor Calculations	3
2.2	Configuration B: 11/12 Short-Pitched Winding	4
2.2.1	Winding Diagram	4
2.2.2	Winding Factor Calculations	4
2.3	Discussion	5
3	Q2: Fractional-Slot Winding Design	5
3.1	Phase Angles of Induced Voltage per Slot	5
3.2	Fundamental Harmonic ($n = 1$)	6
3.3	Third Harmonic ($n = 3$)	8
3.4	Fifth Harmonic ($n = 5$)	9
3.5	Winding Diagram and Balance Verification	10
4	Conclusion	11
A	Project design parameters	11
B	MATLAB Source Code	11

1 Introduction

2 Q1: Integral-Slot Winding Design

For this question, two winding designs are done namely full-pitched and 11/12 short-pitched windings. The given machine parameters for these windings are:

- Number of poles: $p = 6$
- Number of stator slots: $Q = 72$
- Number of phases: $m = 3$
- Winding configuration: Double-layer

Derived Parameters:

1. Slots per pole per phase (q):

$$q = \frac{Q}{p \cdot m} = \frac{72}{6 \times 3} = 4$$

2. Electrical slot angle (α_e):

$$\alpha_e = \frac{p \times 180^\circ}{Q} = \frac{6 \times 180^\circ}{72} = 15^\circ/\text{slot}$$

3. Mechanical slot angle (α_m):

$$\alpha_m = \frac{360^\circ}{Q} = \frac{360^\circ}{72} = 5^\circ/\text{slot}$$

4. Pole pitch (τ_p):

$$\tau_p = \frac{Q}{p} = \frac{72}{6} = 12 \text{ slots}$$

2.1 Configuration A: Full-Pitched Winding

2.1.1 Winding Diagram

For a full-pitched winding, the coil span equals the pole pitch: $y = \tau_p = 12$ slots, corresponding to 180° electrical. In a double-layer winding, the top layer conductor in slot i is connected to the bottom layer conductor in slot $i + y$. This means the bottom layer of slot i serves as the return side of the coil whose top side resides in slot $i - y$. Since the phase sequence repeats every 12 slots with alternating polarity, the bottom layer ends up identical to the top layer at each slot position.

The phase sequence follows the order $A, -C, B, -A, C, -B$, giving a balanced 3-phase layout across the 24-slot pole-pair:

Table 1: Double-layer full-pitched winding layout (one pole-pair)

Slot	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
Top	A	A	A	A	-C	-C	-C	-C	B	B	B	B	-A	-A	-A	-A	C	C	C	C	-B	-B	-B	-B
Bottom	A	A	A	A	-C	-C	-C	-C	B	B	B	B	-A	-A	-A	-A	C	C	C	C	-B	-B	-B	-B

2.1.2 Winding Factor Calculations

The general formulas for the n -th harmonic are:

$$k_{d,n} = \frac{\sin\left(\frac{n \cdot q \cdot \alpha_e}{2}\right)}{q \cdot \sin\left(\frac{n \cdot \alpha_e}{2}\right)} \quad k_{p,n} = \sin\left(\frac{n \cdot y_e}{2}\right) \quad k_{w,n} = k_{d,n} \cdot k_{p,n}$$

where $y_e = 180^\circ$ electrical for full pitch.

Fundamental ($n = 1$):

$$k_{d,1} = \frac{\sin(4 \times 15^\circ / 2 \times 1)}{4 \sin(15^\circ / 2 \times 1)} = \frac{\sin(30^\circ)}{4 \sin(7.5^\circ)} = \frac{0.500}{4 \times 0.131} = \frac{0.500}{0.522} = 0.958$$

$$k_{p,1} = \sin(90^\circ) = 1.000 \quad \Rightarrow \quad k_{w,1} = 0.958$$

3rd Harmonic ($n = 3$):

$$k_{d,3} = \frac{\sin(3 \times 30^\circ)}{4 \sin(3 \times 7.5^\circ)} = \frac{\sin(90^\circ)}{4 \sin(22.5^\circ)} = \frac{1.000}{4 \times 0.383} = \frac{1.000}{1.531} = 0.653$$

$$k_{p,3} = \sin(3 \times 90^\circ) = \sin(270^\circ) = -1.000 \quad \Rightarrow \quad k_{w,3} = -0.653$$

5th Harmonic ($n = 5$):

$$k_{d,5} = \frac{\sin(5 \times 30^\circ)}{4 \sin(5 \times 7.5^\circ)} = \frac{\sin(150^\circ)}{4 \sin(37.5^\circ)} = \frac{0.500}{4 \times 0.609} = \frac{0.500}{2.435} = 0.205$$

$$k_{p,5} = \sin(5 \times 90^\circ) = \sin(450^\circ) = 1.000 \quad \Rightarrow \quad k_{w,5} = 0.205$$

Table 2: Winding factors for the full-pitched configuration.

Harmonic (n)	$k_{d,n}$	$k_{p,n}$	$k_{w,n}$
1 (Fundamental)	0.958	1.000	0.958
3	0.653	-1.000	-0.653
5	0.205	1.000	0.205

2.2 Configuration B: 11/12 Short-Pitched Winding

2.2.1 Winding Diagram

For the 11/12 short-pitched design, the coil span is reduced by one slot: $y = 11$ slots. In electrical degrees:

$$y_e = 11 \times 15^\circ = 165^\circ \text{ electrical}$$

The top layer is identical to the full-pitch case. However, the bottom layer of slot i now carries the return conductor of the coil whose top side is at slot $i - 11$. This shifts the bottom layer by one slot relative to the full-pitch arrangement:

Table 3: Double-layer 11/12 short-pitched winding layout.

Slot	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
Top	A	A	A	A	-C	-C	-C	-C	B	B	B	B	-A	-A	-A	-A	C	C	C	C	-B	-B	-B	-B
Bottom	A	A	A	-C	-C	-C	-C	B	B	B	-A	-A	-A	-A	C	C	C	C	-B	-B	-B	-B	A	A

2.2.2 Winding Factor Calculations

The distribution factor does not depend on the pitch which makes the distribution factor identical for both configurations. Only the pitch factor changes:

$$k_{p,n} = \sin\left(\frac{n \times 165^\circ}{2}\right) = \sin(n \times 82.5^\circ)$$

Fundamental ($n = 1$):

$$k_{p,1} = \sin(82.5^\circ) = 0.991 \quad \Rightarrow \quad k_{w,1} = 0.958 \times 0.991 = 0.949$$

3rd Harmonic ($n = 3$):

$$k_{p,3} = \sin(247.5^\circ) = -0.924 \quad \Rightarrow \quad k_{w,3} = 0.653 \times (-0.924) = -0.604$$

5th Harmonic ($n = 5$):

$$k_{p,5} = \sin(412.5^\circ) = \sin(52.5^\circ) = 0.793 \quad \Rightarrow \quad k_{w,5} = 0.205 \times 0.793 = 0.163$$

Table 4: Winding factors for the 11/12 short-pitched configuration.

Harmonic (n)	$k_{d,n}$	$k_{p,n}$	$k_{w,n}$
1 (Fundamental)	0.958	0.991	0.949
3	0.653	-0.924	-0.604
5	0.205	0.793	0.163

2.3 Discussion

The following conclusions can be drawn:

1. Moving from full-pitch to 11/12 short-pitch reduces the fundamental winding factor minimally, from $k_{w,1} = 0.958$ to 0.949 (a decrease of 0.9%). The machine sustains nearly the same torque and back-EMF capability.
2. Third harmonic slightly decreased (7.5%) for short-pitch configuration. However, in a balanced 3-phase machine the triplen harmonics ($n = 3, 9, 15, \dots$) cancel in the *line-to-line* voltage and do not appear in the output regardless of their winding factor. Yet, they may still contribute to stator core losses and noise.
3. Short-pitching reduces $|k_{w,5}|$ from 0.205 to 0.163 (approximately 20% reduction). The pitch factor $k_{p,5}$ drops from 1.000 to 0.793. This is the primary benefit of the 11/12 pitch: it meaningfully attenuates the 5th space harmonic, which is responsible for additional losses in the machine.
4. Short-pitching always involves a trade-off between harmonic suppression and fundamental EMF and torque. In this case the 11/12 pitch is a very efficient compromise, it achieves noticeable 5th harmonic reduction at the cost of less than 1% in fundamental performance.

Table 5: Winding factor comparison between the two configurations.

Harmonic	Full Pitch ($y = 12$)		Short Pitch ($y = 11$)	
	$k_{p,n}$	$k_{w,n}$	$k_{p,n}$	$k_{w,n}$
$n = 1$	1.000	0.958	0.991	0.949
$n = 3$	-1.000	-0.653	-0.92	-0.604
$n = 5$	1.000	0.205	0.793	0.163

3 Q2: Fractional-Slot Winding Design

The assigned design for this project has the following parameters:

- Number of stator slots: $N_s = 15$
- Number of rotor poles: $N_m = 14$
- Number of phases: $m = 3$
- Slots per pole per phase: $N_{spp} \approx 0.357$

3.1 Phase Angles of Induced Voltage per Slot

The electrical angle of a slot can be found as:

$$\varphi_k = \frac{N_m \cdot 180^\circ}{N_s} \cdot k = \frac{14 \cdot 180^\circ}{15} = 168^\circ \cdot k$$

where k is the slot index starting from 1. This means each slot's induced EMF will have a phase angle that is a multiple of 168° . Since 168° is not an integer divisor of 360° , the slot phasors will be distributed around the circle in a non-repetitive manner, which is characteristic of fractional-slot windings. The angle of the induced EMF in every slot is presented in the Table 6 below. Also, phaseor diagram of all slot is presented in Figure 1.

Table 6: Induced EMF phase angle and phase assignment for each slot (fundamental, $n = 1$).

Slot	φ_k	Phase	Sign	Slot	φ_k	Phase	Sign
1	0°	A	+	9	264°	C	+
2	168°	A	−	10	72°	C	−
3	336°	A	+	11	240°	C	+
4	144°	B	+	12	48°	C	−
5	312°	B	−	13	216°	C	+
6	120°	B	+	14	24°	A	+
7	288°	B	−	15	192°	A	−
8	96°	B	+				

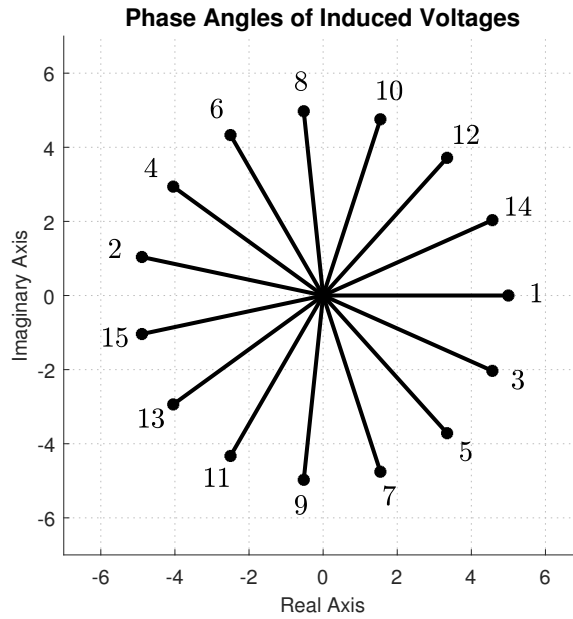
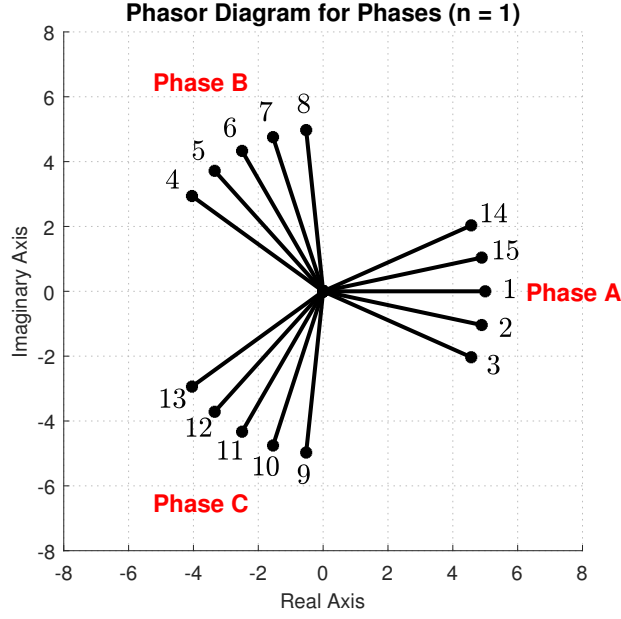


Figure 1: Phasor diagram of the fractional-slot winding.

3.2 Fundamental Harmonic ($n = 1$)

Phasor diagram for the fundamental harmonic ($n = 1$) is shown in Figure 2. The slot phasors for each phase are summed vectorially to find the resultant phasor for that phase. The angles of the resultant phasors for the three phases are 0° for Phase A, 120° for Phase B, and 240° for Phase C, confirming a balanced three-phase system.

Figure 2: Phasor diagram of the three phases ($n = 1$).

The winding factor for the n -th harmonic is computed as the ratio of the vector sum magnitude to the arithmetic sum magnitude of the slot phasors for one phase.

$$k_{w,n} = \frac{\left| \sum_{\text{Phase}} \vec{e}_{k,n} \right|}{N_s/m}$$

where each phasor $\vec{e}_{k,n}$ has unit magnitude. The Phase A phasors and their effective angles are presented in the Table 7 below. Distribution factor for the first fundamental is calculated using the angles of the phasors.

Table 7: Phase A phasors for $n = 1$.

Slot	Sign	Raw angle φ_k	Effective phasor angle
1	+	0°	0°
14	+	24°	24°
15	−	192°	12°
2	−	168°	348°
3	+	336°	336°

The vector sum of these 5 unit phasors is calculated by summing their real and imaginary components:

$$\sum \cos \theta = \cos(0^\circ) + \cos(24^\circ) + \cos(12^\circ) + \cos(348^\circ) + \cos(336^\circ) = 4.783$$

$$\sum \sin \theta = \sin(0^\circ) + \sin(24^\circ) + \sin(12^\circ) + \sin(348^\circ) + \sin(336^\circ) = 0$$

$$k_{w,1} = \frac{|\vec{e}_1 + \vec{e}_{14} + \vec{e}_{15} + \vec{e}_2 + \vec{e}_3|}{5} = \frac{4.783}{5} = \mathbf{0.957}$$

3.3 Third Harmonic ($n = 3$)

For the 3rd harmonic, the electrical angle of each slot scales by a factor of 3. The effective electrical slot pitch becomes:

$$\alpha_{e,3} = 3 \times 168^\circ = 504^\circ \equiv 144^\circ$$

Phasor diagram for the third harmonic is shown in Figure 3. The phasors for the 3rd harmonic will be more widely spaced due to the increased electrical angle, and their vector sum will yield a smaller resultant, indicating a lower winding factor for this harmonic.

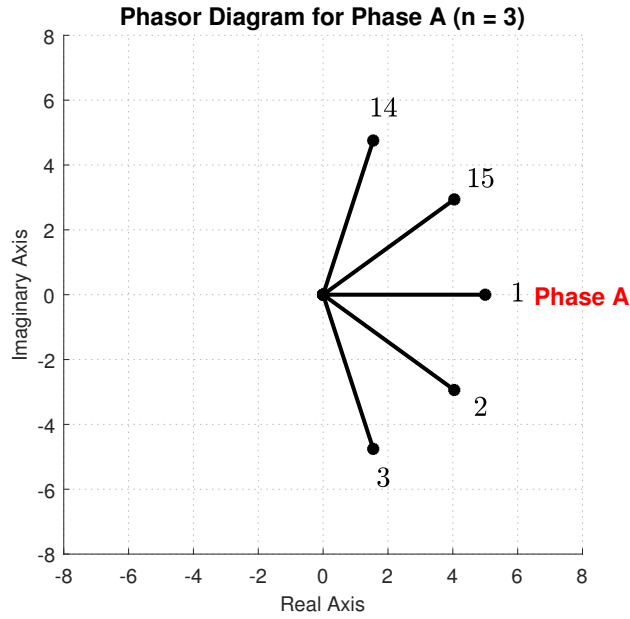


Figure 3: Phasor diagram of phase A ($n = 3$).

Multiplying the fundamental raw angles of Phase A by 3 and applying a 180° shift for the negative-polarity coils yields the 3rd harmonic effective phasor angles shown in Table 8.

Table 8: Phase A phasors for $n = 3$.

Slot	Sign	Raw angle φ_k	Effective Phasor Angle
1	+	0°	0°
14	+	72°	72°
15	−	216°	36°
2	−	144°	324°
3	+	288°	288°

The vector sum of these 5 unit phasors is calculated by summing their real and imaginary components:

$$\sum \cos \theta = \cos(0^\circ) + \cos(72^\circ) + \cos(36^\circ) + \cos(324^\circ) + \cos(288^\circ) = 3.236$$

$$\sum \sin \theta = \sin(0^\circ) + \sin(72^\circ) + \sin(36^\circ) + \sin(324^\circ) + \sin(288^\circ) = 0$$

The winding factor for the 3rd harmonic is computed as:

$$k_{w,3} = \frac{3.236}{5} = \mathbf{0.647}$$

3.4 Fifth Harmonic ($n = 5$)

For the 5th harmonic, the effective electrical slot pitch scales by a factor of 5:

$$\alpha_{e,5} = 5 \times 168^\circ = 840^\circ \equiv 120^\circ$$

Phasor diagram for the fifth harmonic is shown in Figure 4.

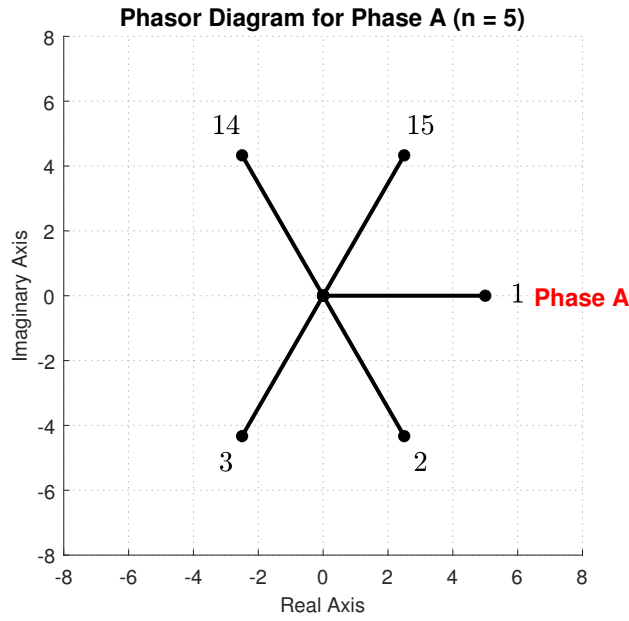


Figure 4: Phasor diagram of phase A ($n = 5$).

Multiplying the fundamental raw angles of Phase A by 5 and handling the coil polarities yields the 5th harmonic effective phasor angles presented in Table 9.

Table 9: Phase A phasors for $n = 5$.

Slot	Sign	Raw angle φ_k	Effective Phasor Angle
1	+	0°	0°
14	+	120°	120°
15	−	240°	60°
2	−	120°	300°
3	+	240°	240°

The vector components sum up as follows:

$$\sum \cos \theta = \cos(0^\circ) + \cos(120^\circ) + \cos(60^\circ) + \cos(300^\circ) + \cos(240^\circ) = 1$$

$$\sum \sin \theta = \sin(0^\circ) + \sin(120^\circ) + \sin(60^\circ) + \sin(300^\circ) + \sin(240^\circ) = 0$$

The winding factor for the 5th harmonic is:

$$k_{w,5} = \frac{1}{5} = \mathbf{0.200}$$

Table 10: Winding factors summary for harmonics $n = 1, 3, 5$.

Harmonic (n)	$k_{w,n}$
1	0.957
3	0.647
5	0.200

3.5 Winding Diagram and Balance Verification

The winding layout is designed as a double-layer concentrated configuration. The full physical slot distribution mapping all three phases across the 15 stator slots is presented in Table 11.

Table 11: Double-layer concentrated winding slot assignment mapping for all phases.

Slot ID	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
Top Layer	A+	A-	A+	B+	B-	B+	B-	B+	C+	C-	C+	C-	C+	A+	A-
Bottom Layer	A+	A-	B-	B+	B-	B+	B-	C-	C+	C-	C+	C-	A-	A+	A-

To verify that this fractional-slot double-layer layout represents a valid and balanced configuration, the net complex fundamental EMF voltage vectors ($\vec{E}_k = \text{Sign} \times e^{j\varphi_k}$) are computed for each phase using the baseline slot angle formula $\varphi_k = (k - 1) \times 168^\circ$:

$$\begin{aligned}\vec{E}_A &= 2e^{j0^\circ} - 2e^{j168^\circ} - 1e^{j216^\circ} + 2e^{j24^\circ} - 2e^{j192^\circ} = \mathbf{8.662\angle 9.3^\circ} \\ \vec{E}_B &= -1e^{j336^\circ} + 2e^{j144^\circ} - 2e^{j312^\circ} + 2e^{j120^\circ} - 2e^{j288^\circ} + 1e^{j96^\circ} = \mathbf{8.662\angle 129.3^\circ} \\ \vec{E}_C &= -1e^{j96^\circ} + 2e^{j264^\circ} - 2e^{j72^\circ} + 2e^{j240^\circ} - 2e^{j48^\circ} + 1e^{j216^\circ} = \mathbf{8.662\angle 249.3^\circ}\end{aligned}$$

Evaluating the relative displacement between adjacent phases yields:

$$\begin{aligned}\Delta\theta_{AB} &= 129.3^\circ - 9.3^\circ = 120.0^\circ \\ \Delta\theta_{BC} &= 249.3^\circ - 129.3^\circ = 120.0^\circ \\ \Delta\theta_{CA} &= 369.3^\circ - 249.3^\circ = 120.0^\circ\end{aligned}$$

The phase resultants form a balanced three-phase set. They possess completely uniform vector magnitudes and maintain an exact angular displacement of 120.0° electrical degrees, confirming the electrical balance of the double-layer design.

4 Conclusion

A Project design parameters

B MATLAB Source Code

The MATLAB script used for the analytical calculations and plots in Q1 is provided below.