

A

B

C


D

A

B





C

D


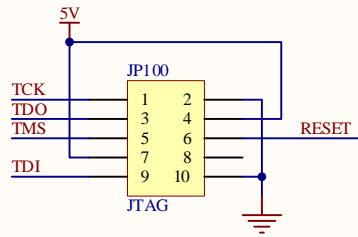


JTAG Programming Interface



RS-232 Interface

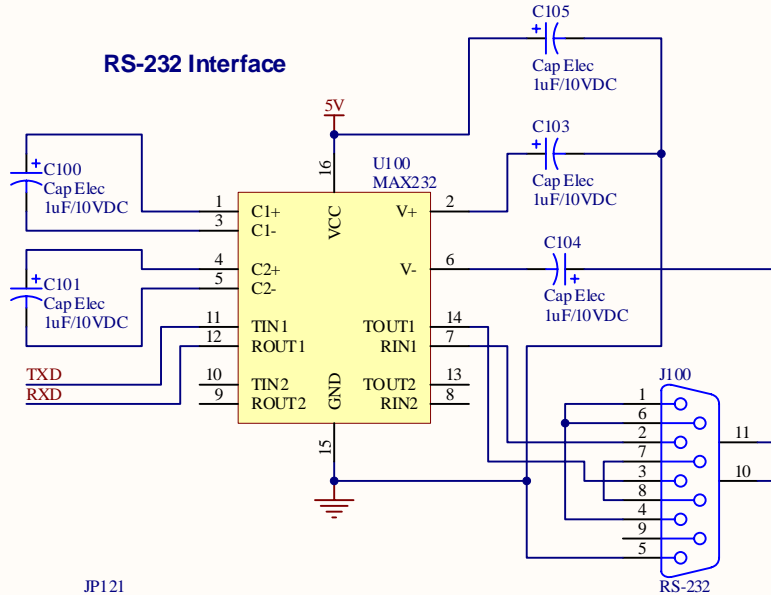


Digital I/O (To be revised)

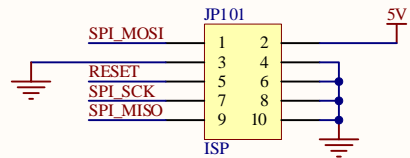


ISP Programming Interface







Sound output

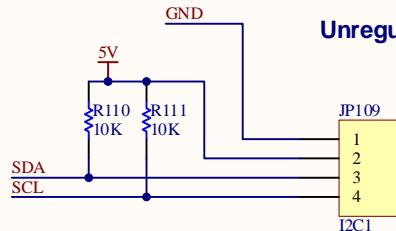


Unregulated Voltage Input/Output

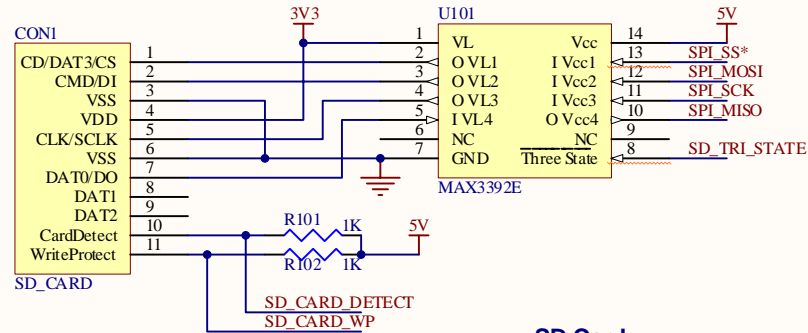


SD Card




SPI Serial
SPI_SS* is used for the serial ROM

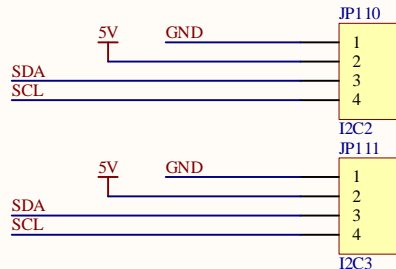

PC Serial Interface

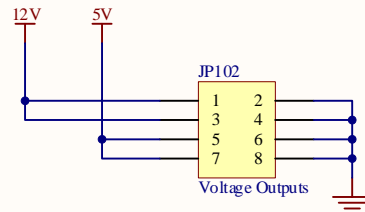

Regulated Voltage Outputs



ADC Inputs

Title		
Size	Number	Revision
A4		
Date:	21-Mar-07	Sheet of
File:	C:\Documents and Settings\...\Interfaces and I/O Drivers.SCHDOC	