

Middle East Technical University

Department of Electrical and Electronics Engineering

EE568 – Selected Topics in Electrical Machines

Project 1: Torque in a Variable Reluctance Machine

Author: Elif Topaloğlu

Date: April 11, 2026

GitHub Repository:

<https://github.com/odtu/EE568/tree/master/Project1>

Contents

1	Introduction	2
2	Analytical Modelling - Q1	2
2.1	Assumptions	2
2.2	Reluctance and Inductance Analysis - Part (a)	3
2.2.1	Inductance as a Function of Rotor Position	4
2.2.2	Numerical Results Summary	5
2.3	Torque under Constant DC Excitation - Part (b)	5
2.3.1	Torque Derivation	5
2.3.2	Torque as a Function of Rotor Position	6
2.3.3	Results Summary	7
2.4	Non-Linear Effects and Model Improvements - Part (c)	7
2.4.1	Fringing Flux	7
2.4.2	Non-Homogeneous Flux Distribution	8
2.4.3	Saturation and Non-Linear Permeability	8
3	Q2 – FEA Modelling (2D, Linear Materials)	8
3.1	Software and Setup	8
3.2	Part (a) – Flux Density Vectors (0° , 45° , 90°)	8
3.3	Part (b) – Inductance and Stored Energy	8
3.4	Part (c) – Torque vs. Rotor Angle: Comparison with Analytical Model	8
4	Q3 – FEA Modelling (2D, Non-Linear Materials)	8
4.1	Parts (a, b, c) – Flux Density, Inductance, Stored Energy, Torque	8
4.2	Part (d) – Comparison: Linear vs. Non-Linear, Fringing and Saturation Effects	8
5	Q4 – Control Method for Continuous Rotation	8
6	Conclusion	9
A	Material Properties	9
B	MATLAB Source Code	9

1 Introduction

This report presents the analytical modeling and simulation analysis of a variable reluctance machine (VRM) as part of EE568 Project 1. Variable reluctance machines generate torque by minimizing the reluctance of the magnetic circuit; unlike permanent magnet or wound-rotor machines, they require no rotor excitation, making them robust and low-cost.

The main objectives of this project are:

1. Derive analytical expressions for the reluctance, inductance, and torque as a function of rotor position.
2. Model the system in a 2D finite element analysis (FEA) software using linear material properties and compare with the analytical results.
3. Extend the FEA model to non-linear material properties and investigate the effects of saturation and fringing flux.
4. Propose a control strategy to achieve continuous rotor rotation.

The machine geometry for this project is defined on the course GitHub page. Some of the key parameters are summarized in Table 1.

Table 1: Machine Parameters

Parameter	Symbol	Value
Number of turns	N	300
Coil current (DC)	I	2.5 A
Core depth	d	25 mm
Core width	w_c	15 mm
Air-gap clearance	g	0.5 mm
Coil winding area	A_{coil}	30 mm $\times$ 10 mm

2 Analytical Modelling - Q1

2.1 Assumptions

The following simplifying assumptions are adopted throughout the analytical model:

1. The core material is infinitely permeable ($\mu_r \rightarrow \infty$), so the core reluctance is negligible.
2. Inductance varies sinusoidally with rotor position.
3. Fringing flux at the air-gap is neglected.
4. The magnetic system is linear (no saturation).
5. Magnetic flux is uniformly distributed across the core cross-section.

2.2 Reluctance and Inductance Analysis - Part (a)

By using the assumptions given, reluctance of the system can be calculated by the below formula:

$$\mathcal{R} = \frac{l}{\mu A_{core}} \quad (1)$$

where l is the path length, μ is the permeability and A_{core} is the core cross-sectional area. As the assumption states, core has infinitely permeable which makes the core reluctance zero. Thus, total reluctance will only consider the air gap reluctance. As the air-gap changes with respect to position, there will be a minimum and a maximum reluctance value. In below, all the parameters to find the reluctance and the maximum and minimum reluctance values is calculated.

The core cross-sectional area is:

$$A_c = w_c \cdot d = 15 \times 10^{-3} \times 25 \times 10^{-3} = 375 \times 10^{-6} \text{ m}^2 \quad (2)$$

When the rotor tooth is fully aligned with the stator pole which is the minimum inductance position, the total air-gap path length consists of two single air-gaps:

$$l_{g,\min} = 2g = 2 \times 0.5 = 1 \text{ mm} \quad (3)$$

When the rotor is in the fully unaligned position, the flux path must also traverse the additional 2 mm each side:

$$l_{g,\max} = 2g + 2 \times 2 \text{ mm} = 1 + 4 = 5 \text{ mm} \quad (4)$$

Substituting into Equation (1):

$$\mathcal{R}_{\min} = \frac{1 \times 10^{-3}}{4\pi \times 10^{-7} \times 375 \times 10^{-6}} = 2.12 \times 10^6 \text{ H}^{-1} \quad (5)$$

$$\mathcal{R}_{\max} = \frac{5 \times 10^{-3}}{4\pi \times 10^{-7} \times 375 \times 10^{-6}} = 1.06 \times 10^7 \text{ H}^{-1} \quad (6)$$

The self-inductance of the coil is related to the reluctance by:

$$L = \frac{N^2}{\mathcal{R}} \quad (7)$$

Therefore, by using Equation (7):

$$L_{\max} = \frac{300^2}{\mathcal{R}_{\min}} = \frac{90,000}{2.122 \times 10^6} \approx 42.41 \text{ mH} \quad (8)$$

$$L_{\min} = \frac{300^2}{\mathcal{R}_{\max}} = \frac{90,000}{1.061 \times 10^7} \approx 8.48 \text{ mH} \quad (9)$$

2.2.1 Inductance as a Function of Rotor Position

The question further asks for the variation of the inductance with respect to the position under the assumption of sinusoidal variation. Since the machine has two poles due to variable reluctance, one mechanical revolution will produce two electrical cycles. Assuming a sinusoidal variation of inductance with the electrical angle θ :

$$L(\theta) = L_{\text{avg}} + L_{\Delta} \cos(2\theta) \quad (10)$$

where:

$$L_{\text{avg}} = \frac{L_{\max} + L_{\min}}{2} = \frac{42.41 + 8.48}{2} \approx 25.45 \text{ mH} \quad (11)$$

$$L_{\Delta} = \frac{L_{\max} - L_{\min}}{2} = \frac{42.41 - 8.48}{2} \approx 16.96 \text{ mH} \quad (12)$$

The resulting inductance profile is plotted in Figure 1.

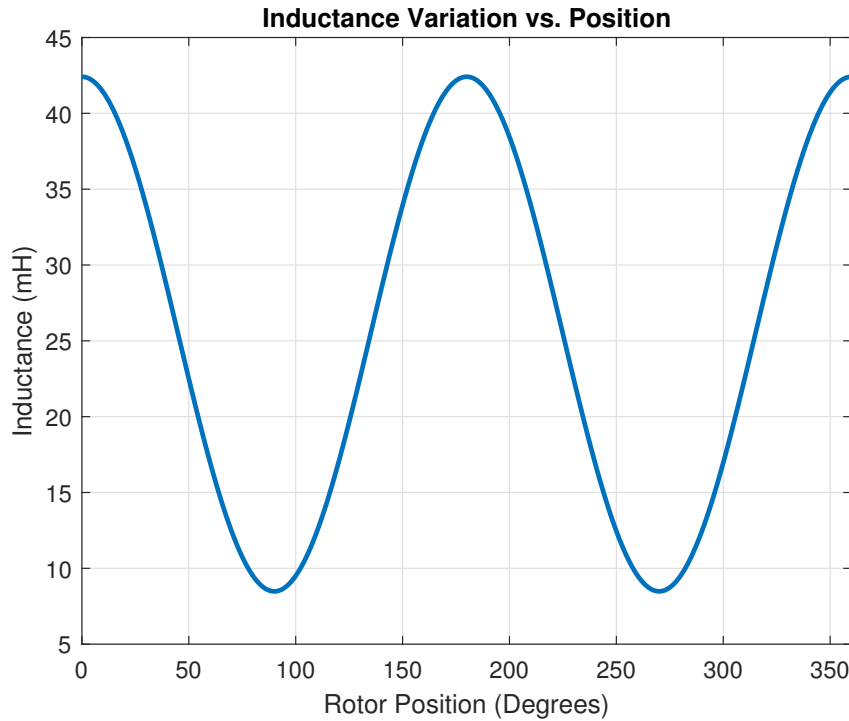


Figure 1: Inductance variation as a function of rotor position.

The inductance reaches its peak of 42.41 mH at the aligned positions (0° and 180°) and its minimum of 8.48 mH at the unaligned positions (90° and 270°).

2.2.2 Numerical Results Summary

Finally, numerical results for this part is summarized below.

Table 2: Analytical Reluctance and Inductance Results

Quantity	Symbol	Value
Minimum reluctance	$\mathcal{R}_{\min}$	$2.122 \times 10^6 \text{ H}^{-1}$
Maximum reluctance	$\mathcal{R}_{\max}$	$1.061 \times 10^7 \text{ H}^{-1}$
Maximum inductance	$L_{\max}$	42.41 mH
Minimum inductance	$L_{\min}$	8.48 mH

2.3 Torque under Constant DC Excitation - Part (b)

2.3.1 Torque Derivation

To derive the torque expression, one should make use of the stored magnetic energy on an inductor. The stored magnetic energy can be expressed in terms of flux linkage as:

$$W = \int_0^\lambda i(\lambda) d\lambda \quad (13)$$

For a linear magnetic system, the relationship between flux linkage and current is:

$$\lambda = L(\theta) i \quad (14)$$

Thus, the current can be written as:

$$i = \frac{\lambda}{L(\theta)} \quad (15)$$

Substituting into the energy expression:

$$W = \int_0^\lambda \frac{\lambda}{L(\theta)} d\lambda \quad (16)$$

Since $L(\theta)$ is independent of λ (linear system), it can be treated as constant:

$$W = \frac{1}{L(\theta)} \int_0^\lambda \lambda d\lambda \quad (17)$$

$$W = \frac{1}{L(\theta)} \cdot \frac{1}{2} \lambda^2 \quad (18)$$

Substituting $\lambda = L(\theta)i$:

$$W = \frac{1}{2}L(\theta)i^2 \quad (19)$$

The electromagnetic torque is obtained from:

$$T = \frac{dW}{d\theta} \quad (20)$$

$$T = \frac{d}{d\theta} \left(\frac{1}{2}L(\theta)i^2 \right) \quad (21)$$

For constant current excitation:

$$T(\theta) = \frac{1}{2}i^2 \frac{dL(\theta)}{d\theta} \quad (22)$$

Inductance variation is defined in the previous question. By taking the derivative, one can obtain the inductance variation as follows:

$$L(\theta) = L_{\text{avg}} + L_{\text{amp}} \cos(2\theta) \quad (23)$$

$$\frac{dL}{d\theta} = -2L_{\text{amp}} \sin(2\theta) \quad (24)$$

By inserting the inductance variation into Equation (22), the final torque equation becomes:

$$T(\theta) = -i^2 L_{\text{amp}} \sin(2\theta) \quad (25)$$

2.3.2 Torque as a Function of Rotor Position

The torque profile is plotted in Figure 2 by using the derived equation.

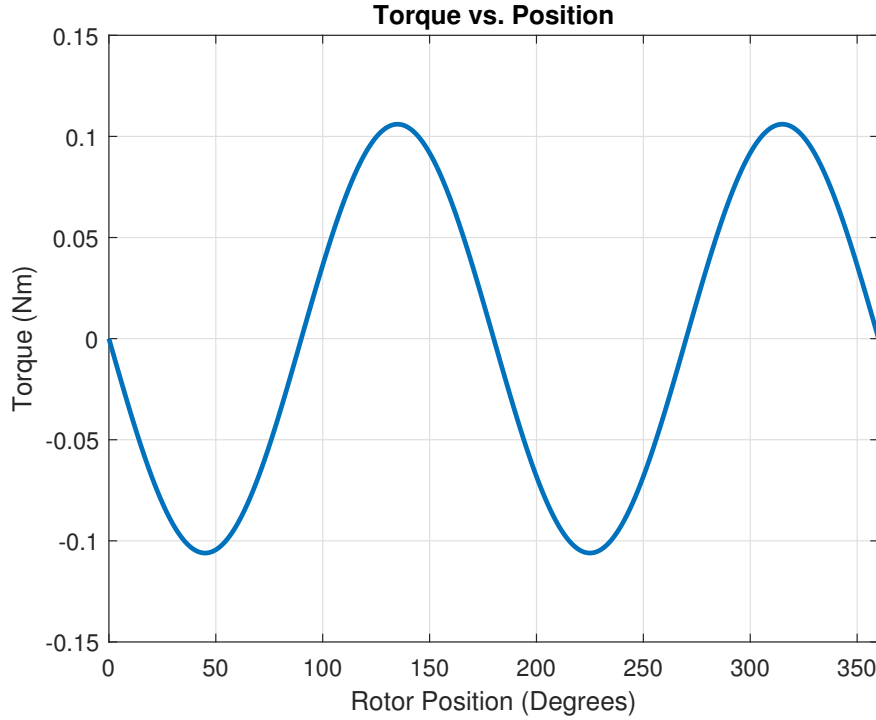


Figure 2: Electromagnetic torque as a function of rotor position under constant DC excitation ($I = 2.5$ A).

2.3.3 Results Summary

Table 3: Torque Results (Constant DC Excitation)

Quantity	Symbol	Value
Maximum torque	$T_{\max}$	0.11 Nm
Minimum torque	$T_{\min}$	-0.11 Nm

The torque is sinusoidal at twice the rotor frequency. It is positive in the regions where inductance is increasing (rotor moving towards alignment) and negative where inductance is decreasing. Under constant DC excitation, the average torque over a full revolution is zero, since the positive and negative half-cycles cancel.

2.4 Non-Linear Effects and Model Improvements - Part (c)

2.4.1 Fringing Flux

In the simple analytical model, flux is assumed to flow only through the face of the stator pole directly across the air-gap, ignoring the flux that flows outward around the pole edges. In practice, this fringing flux can significantly increase the effective cross-sectional area, particularly when the air-gap is large (unaligned position). One common correction is to add the gap length to each linear dimension of the pole face to obtain an effective area:

$$A_{\text{eff}} = (w_c + g)(d + g) \quad (26)$$

This correction is applied separately for each rotor position and reduces the reluctance, raising the predicted inductance closer to FEA results.

2.4.2 Non-Homogeneous Flux Distribution

The assumption of uniform flux distribution across the pole face is only valid when the aspect ratio of the cross-section is close to unity and when the core is far from saturation. A more accurate treatment would divide the core and air-gap regions into parallel flux tubes and solve for the flux in each tube independently, accounting for the spatial variation of permeability in a saturating core.

2.4.3 Saturation and Non-Linear Permeability

When the flux density in the core approaches the saturation flux density ($B_{\text{sat}} \approx 1.5 \text{ T}$ for typical electrical steel), the incremental permeability drops sharply. In this regime, the inductance is no longer constant for a given position—it becomes a function of both θ and I . The co-energy must be computed numerically from the magnetisation curve:

$$W'(I, \theta) = \int_0^I \lambda(i, \theta) di \quad (27)$$

and the torque obtained as $T = \partial W' / \partial \theta \big|_{I=\text{const}}$.

This requires the B-H curve of the selected lamination material to be incorporated.

3 Q2 – FEA Modelling (2D, Linear Materials)

This section will be completed after the FEA simulations are performed.

3.1 Software and Setup

3.2 Part (a) – Flux Density Vectors (0°, 45°, 90°)

3.3 Part (b) – Inductance and Stored Energy

3.4 Part (c) – Torque vs. Rotor Angle: Comparison with Analytical Model

4 Q3 – FEA Modelling (2D, Non-Linear Materials)

This section will be completed after the non-linear FEA simulations are performed.

4.1 Parts (a, b, c) – Flux Density, Inductance, Stored Energy, Torque

4.2 Part (d) – Comparison: Linear vs. Non-Linear, Fringing and Saturation Effects

5 Q4 – Control Method for Continuous Rotation

This section will be completed.

6 Conclusion

The analytical model of the variable reluctance machine was developed under linearised assumptions. The maximum and minimum inductances were found to be 42.41 mH and 8.48 mH, corresponding to the aligned and unaligned rotor positions respectively. The peak torque under 2.5 A DC excitation is ± 0.106 Nm, varying sinusoidally at twice the rotor frequency.

FEA simulations (Q2, Q3) and the control strategy (Q4) will be added as the project progresses.

A Material Properties

This appendix will list the B-H curve data and material properties of the electrical steel lamination selected for the FEA simulations in Q2 and Q3.

B MATLAB Source Code

The MATLAB script used for the analytical calculations and plots in Q1 is provided below.