Chapter 18 · Semester 2

# ELECTROMAGNETIC INDUCTION

*Notes by Cikgu Suhaili*

21 worked examples  6 simulations  Exercises with answers

## 18.1 Magnetic flux

**Magnetic flux, Φ**

through a surface: the **scalar product of the magnetic flux density B and the area vector A** of the surface. It measures the number of field lines passing through the area.

$$\Phi = \mathbf{B} \cdot \mathbf{A} = BA\cos\theta$$

θ = angle between B and the normal to the surface (the direction of the area vector A).
Unit: weber (Wb) = T $m^2$. Scalar.

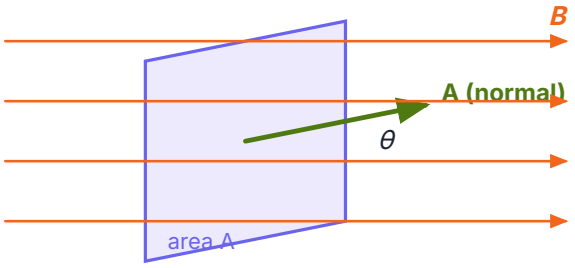



Figure 18.1: the area vector A is normal to the surface.



θ = 0°: Φ = BA (maximum)  θ = 90°: Φ = 0

Figure 18.2: B along the normal gives the largest flux; B in the plane of the surface gives none.

- Flux linkage of a coil of $N$ turns: $N\Phi$.
- Rearranged, $B = \Phi/A_{\perp}$: magnetic flux density is the flux per unit area perpendicular to the field (1 T = 1 Wb $m^{-2}$).

*Teacher's note*

Read the question carefully: "the **plane** of the loop makes θ with B" means the normal makes (90° − θ) with B, so $\Phi = BA \sin\theta$.

**Example 18.1.1**

A rectangular loop of area 200 cm$^2$ has its plane at 41° to a 0.28 T field. Find the flux through it.

**Solution**

Angle between B and the normal = 90° − 41° = 49°

$\Phi = BA \cos 49° = (0.28)(200 \times 10^{-4})(0.656) =$ **$3.7 \times 10^{-3}$ Wb**

**Example 18.1.2**

A 25 cm × 15 cm loop is in a 0.60 T field and the flux through it is 0.015 Wb. Find the angle between the plane of the loop and the field.

**Solution**

$\cos\theta = \dfrac{\Phi}{BA} = \dfrac{0.015}{(0.60)(0.25 \times 0.15)} = 0.667$, $\theta = 48.2°$ (between B and the normal)

Angle between the plane and B = 90° − 48.2° = **41.8°**

**Example 18.1.3**

A flux of 50 μWb passes perpendicularly through a loop of area 0.78 m$^2$. Find the flux density.

**Solution**

$B = \dfrac{\Phi}{A} = \dfrac{50 \times 10^{-6}}{0.78} =$ **$6.4 \times 10^{-5}$ T**

# 18.2 Faraday's law and Lenz's law

## Faraday's experiments

- A steady current in one coil produces **no** current in a second coil. A current is induced only at the moment the first current is switched on or off.
- Moving a magnet towards a coil induces a current; moving it away induces a current in the opposite direction; no current flows when the magnet and coil are at rest relative to each other.
- The induced current is larger when the magnet moves faster, when the coil has more turns and when the magnet is stronger.

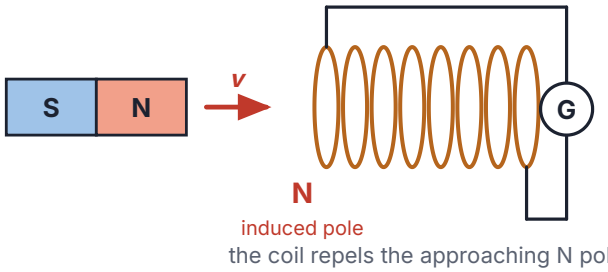



Figure 18.3: a magnet pushed into a coil connected to a galvanometer.

**Faraday's law**

the **magnitude of the induced e.m.f. is proportional to the rate of change of magnetic flux linkage**.

**Lenz's law**

the **induced current flows in a direction that opposes the change producing it**.

$$\varepsilon = -N\frac{\mathrm{d}\Phi}{\mathrm{d}t}$$

the minus sign is Lenz's law. Average e.m.f.: $|\varepsilon| = N|\Delta\Phi|/\Delta t$

- $\Phi = BA\cos\theta$ can change in three ways: change $B$ ($\varepsilon = -NA\,\mathrm{d}B/\mathrm{d}t$), change the area $A$ ($\varepsilon = -NB\,\mathrm{d}A/\mathrm{d}t$), or change the angle $\theta$ (rotate the coil).
- If the coil is part of a closed circuit of resistance $R$, the induced current is $I = |\varepsilon|/R$.
- Lenz's law follows from the **conservation of energy**: if the induced current helped the change, energy would be created from nothing. Work must be done against the opposing force, and this work becomes electrical energy.

## Using Lenz's law




**flux increasing: B ind opposes B ext**

**flux decreasing: B ind is along B ext**

Figure 18.4: the induced field opposes an increase of flux and supports a decrease.

Decide whether the flux through the loop is increasing or decreasing.

The induced current makes its own field **opposite** to the external field if the flux is increasing, and **along** it if the flux is decreasing.


Use the right-hand grip rule to turn the induced field into a current direction.

A north pole pushed towards a coil makes the near end of the coil a north pole (repelling it). Pulled away, the near end becomes a south pole (attracting it). Either way you must do work.

Simulation

## Magnet and coil

Move the magnet in and out of the coil with the slider (or press "Move it for me"). The galvanometer only deflects while the flux is changing; faster motion and more turns give a bigger e.m.f. The colour of the coil end shows the induced pole.

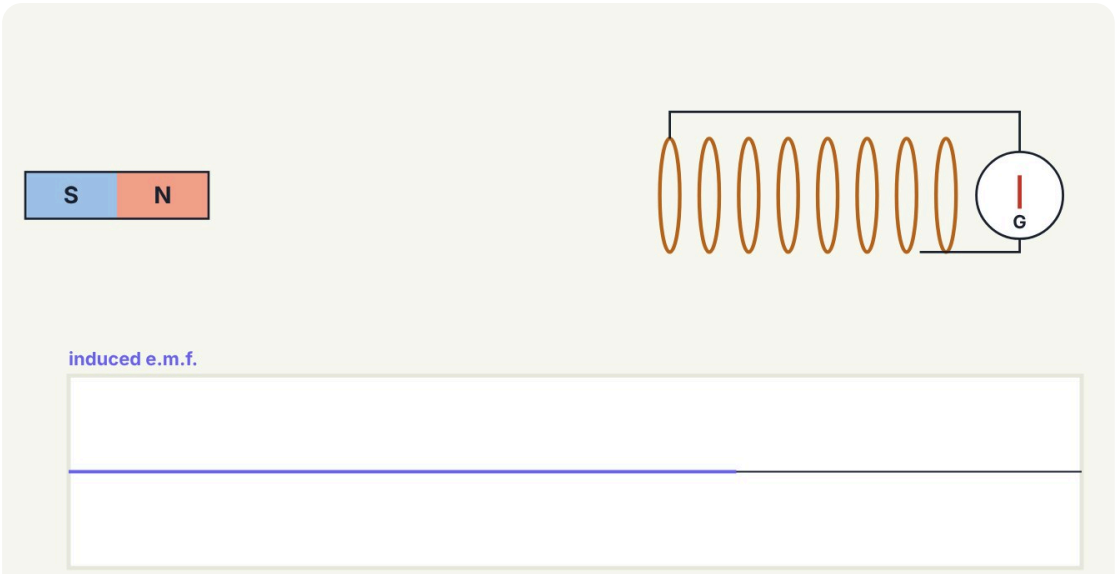


| magnet | near end of the coil | e.m.f. (relative) | N turns |
|---|---|---|---|
| **at rest: no e.m.f.** | — | **0.00** | **10** |

This is a still picture. Open PhysiQ › Notes › Semester 2 › Chapter 18 to use the simulation.

**Example 18.2.1**

A coil of 50 turns and diameter 8.0 cm is in a 1.8 T field perpendicular to its plane. The field falls to 0.60 T in 2.0 ms. Find the average induced e.m.f.

**Solution**

$A = \pi(0.040)^2 = 5.03 \times 10^{-3}\ \text{m}^2$

$$|\varepsilon| = NA\frac{|\Delta B|}{\Delta t} = (50)(5.03 \times 10^{-3})\frac{1.2}{2.0 \times 10^{-3}} = \mathbf{151\ V}$$

**Example 18.2.2**

An elastic circular loop in the plane of the paper is in a 0.75 T field into the paper. Its diameter shrinks from 20.0 cm to 6.0 cm in 0.50 s. Find (a) the direction of the induced current, (b) the average induced e.m.f., (c) the average current if the loop's resistance is 2.5 Ω.

**Solution**

(a) The flux into the paper decreases, so the induced current makes a field into the paper inside the loop: **clockwise**.

(b) $|\Delta A| = \pi(0.100^2 - 0.030^2) = 2.86 \times 10^{-2}\ \text{m}^2$; $|\varepsilon| = B\dfrac{|\Delta A|}{\Delta t} = (0.75)\dfrac{2.86 \times 10^{-2}}{0.50} =$ **43 mV**

(c) $I = \dfrac{0.043}{2.5} =$ **17 mA**

**Example 18.2.3**

A circular coil of radius 3.05 cm, 40 turns and resistance 3.55 Ω is perpendicular to a field of $1.25 \times 10^{-2}$ T. The field increases to 0.450 T in 0.250 s. Find the induced current.


**Solution**

$|\varepsilon| = NA\dfrac{\Delta B}{\Delta t} = (40)\pi(0.0305)^2\dfrac{0.450 - 0.0125}{0.250} = 0.205\ \text{V}$

$I = \dfrac{0.205}{3.55} =$ **0.058 A**

**Example 18.2.4**

A single circular loop of diameter 10 cm is connected in series with a 37 Ω resistor. The field through the loop is into the page and increasing at 0.050 T $s^{-1}$. Find the current and its direction.

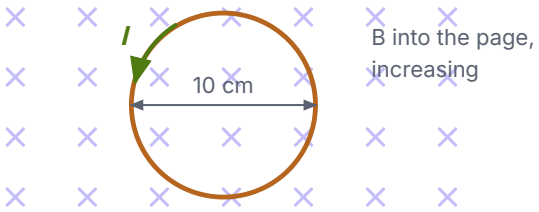


**Solution**

$$|\varepsilon| = A\frac{dB}{dt} = \pi(0.050)^2(0.050) = 3.93 \times 10^{-4}\ \text{V}$$

$$I = \frac{3.93 \times 10^{-4}}{37} = \mathbf{1.1 \times 10^{-5}\ A}$$

The flux into the page increases, so the induced field inside the loop points out of the page: the current is **anticlockwise**.

## E.m.f. induced in a straight conductor moving in a field

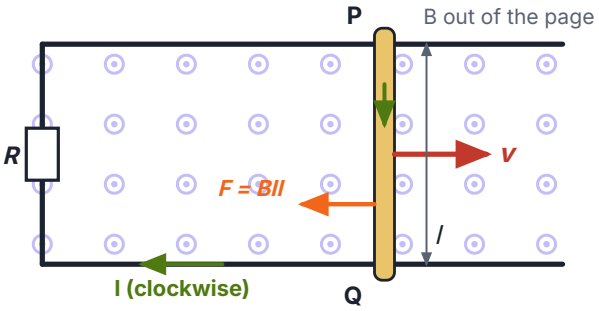



Figure 18.5: a rod of length l sliding at speed v along two rails in a uniform field.

In a time $dt$ the rod moves $dx = v\,dt$, so the area of the circuit increases by $dA = l\,dx = lv\,dt$.

The flux increases by $d\Phi = B\,dA = Blv\,dt$.

Faraday's law: $|\varepsilon| = \frac{d\Phi}{dt} = Blv$. If **v** makes an angle θ with **B**, only the component $v$ sin θ cuts the field lines:

$$\varepsilon = Blv \sin\theta$$

$\theta$ = angle between v and B (rod perpendicular to both)

- The same result comes from the magnetic force on the free electrons in the rod: they are pushed along the rod, one end becomes negative and the other positive.
- Direction of the induced current: **Fleming's right-hand rule** (thumb = motion, first finger = field, second finger = induced current). It always agrees with Lenz's law.
- The current in the rod feels a force $BIl$ that **opposes the motion**; to keep the rod moving at constant speed an equal applied force is needed. The mechanical power $Fv$ equals the electrical power $I^2R$.


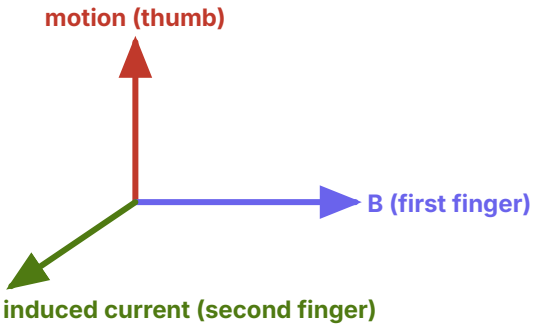



Figure 18.6: Fleming's right-hand rule (for generators: induced current).

Simulation

## A rod sliding on rails

Push the rod with a steady speed. The area of the circuit and the flux grow, an e.m.f. Blv is induced and a current flows. The current makes a force on the rod that opposes the motion; the work done against it becomes heat in R.

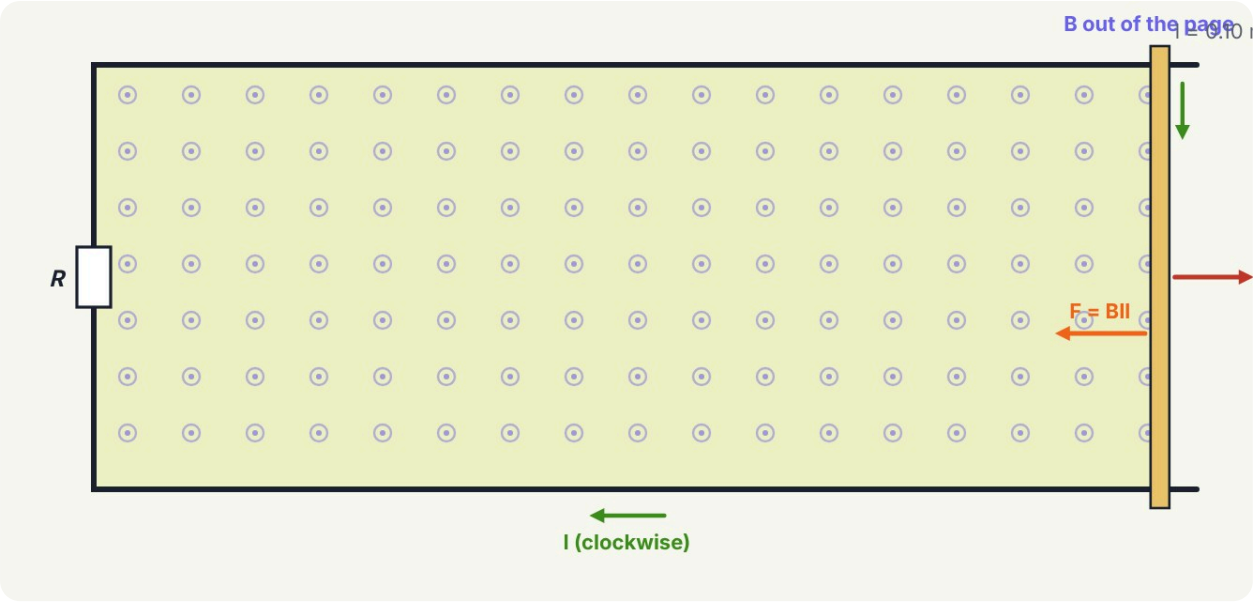


| ε = Blv | I = ε/R | force on the rod BIl (opposes v) | power $I^2R$ = Fv |
|---|---|---|---|
| **0.150 V** | **5.00 A** | **0.300 N** | **0.750 W** |

This is a still picture. Open PhysiQ › Notes › Semester 2 › Chapter 18 to use the simulation.

**Example 18.2.5**

In Figure 18.5, $l$ = 0.10 m, $v$ = 2.5 m s$^{-1}$, $B$ = 0.60 T and the total resistance of the circuit is 0.030 Ω. Find (a) the induced e.m.f., (b) the current, (c) the force on the rod, (d) the power dissipated.

**Solution**

(a) ε = $Blv$ = (0.60)(0.10)(2.5) = **0.15 V**

(b) $I = \dfrac{0.15}{0.030}$ = **5.0 A**

(c) $F = BIl$ = (0.60)(5.0)(0.10) = **0.30 N**, opposing the motion

(d) $P = I^2R$ = $(5.0)^2(0.030)$ = **0.75 W** (= $Fv$ = (0.30)(2.5))

**Example 18.2.6**

A wire of length 0.20 m moves at 4.0 m s$^{-1}$ at 40° to a field of 0.50 T. Find the induced e.m.f.

**Solution**

$\varepsilon = Blv \sin\theta = (0.50)(0.20)(4.0)\sin 40° =$ **0.26 V**

**Example 18.2.7**

A rod of length 0.400 m moves on rails in a field of 1.20 T and the induced e.m.f. is 3.60 V. Find (a) its speed, (b) the current if the total resistance is 0.900 Ω, (c) the force the field exerts on the rod.


**Solution**

(a) $v = \dfrac{\varepsilon}{Bl} = \dfrac{3.60}{(1.20)(0.400)} =$ **7.50 m s$^{-1}$**

(b) $I = \dfrac{3.60}{0.900} =$ **4.00 A**

(c) $F = BIl = (1.20)(4.00)(0.400) =$ **1.92 N**, opposite to the velocity

## E.m.f. induced in a rotating coil (a.c. generator)

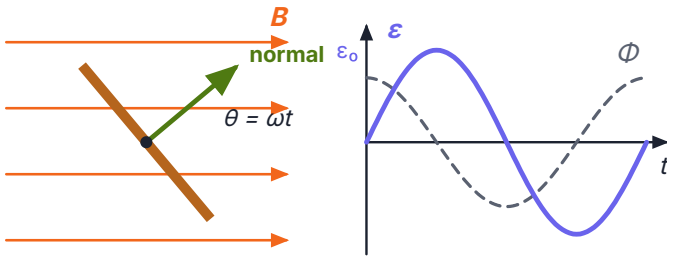


coil seen edge-on, axis ⊥ page

Figure 18.7: a coil rotating at angular speed ω in a uniform field, and the e.m.f. it produces.

A coil of $N$ turns, area $A$, rotates at constant angular speed ω about an axis perpendicular to a uniform field $B$. At time $t$ the normal makes $\theta = \omega t$ with B.

Flux through each turn: $\Phi = BA\cos\omega t$.

$$\varepsilon = -N\frac{d\Phi}{dt} = -NBA\frac{d}{dt}(\cos \omega t) = NBA\omega \sin \omega t$$


$$\varepsilon = NBA\omega \sin \omega t = \varepsilon_0 \sin \omega t$$

peak e.m.f. $\varepsilon_0 = NBA\omega$; $\omega = 2\pi f$

- The e.m.f. is **largest when the flux is zero** (plane of the coil parallel to B: the sides cut the field lines fastest) and **zero when the flux is largest** (plane perpendicular to B).
- Doubling the speed of rotation doubles both the peak e.m.f. and the frequency.

## Simulation A.C. generator

Change the speed of rotation, the flux density and the number of turns. Compare the flux graph with the e.m.f. graph: the e.m.f. is largest where the flux changes fastest, which is where the flux is zero.

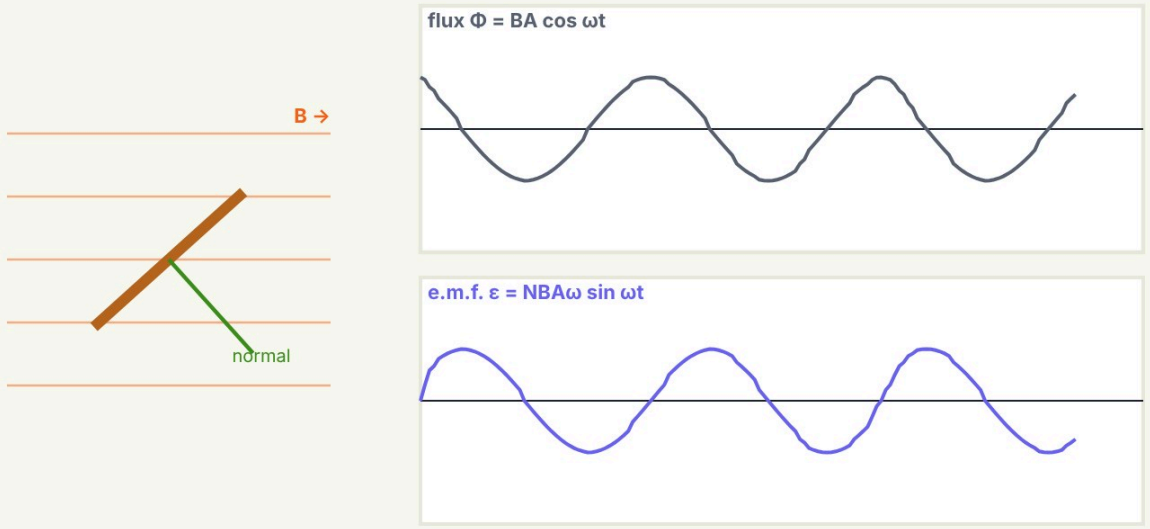


| peak e.m.f. $\varepsilon_0 = NBA\omega$ | e.m.f. now | angle $\theta = \omega t$ | coil area A |
|---|---|---|---|
| **1.57 V** | **−1.17 V** | **312°** | **0.010 m²** |

This is a still picture. Open PhysiQ › Notes › Semester 2 › Chapter 18 to use the simulation.

**Example 18.2.8**


A generator coil has 100 turns of area 0.20 $m^2$ and turns at 60 rev $s^{-1}$ in a field of $1.0 \times 10^{-3}$ T. Find the peak e.m.f.

**Solution**

$\varepsilon_0 = NBA\omega = (100)(1.0 \times 10^{-3})(0.20)(2\pi \times 60) =$ **7.5 V**

**Example 18.2.9**

The graph shows the output of a generator whose coil has 150 turns of area 0.020 $m^2$. Find (a) the frequency, (b) the angular speed, (c) the flux density.

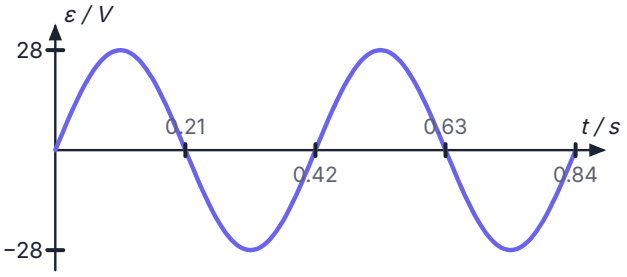


**Solution**

(a) Period $T = 0.42$ s, so $f = \dfrac{1}{0.42} =$ **2.4 Hz**

(b) $\omega = 2\pi f =$ **15 rad $s^{-1}$**

(c) $B = \dfrac{\varepsilon_0}{NA\omega} = \dfrac{28}{(150)(0.020)(14.96)} =$ **0.62 T**

**Example 18.2.10**

A generator coil has 500 turns, each of area 60 $cm^2$, and turns at 3600 rev $min^{-1}$ in a 2.0 mT field. Find (a) the frequency of the e.m.f., (b) the peak e.m.f., (c) the e.m.f. when the plane of the coil makes 60° with the field.

**Solution**

(a) $f = \dfrac{3600}{60}$ = **60 Hz** ($\omega = 2\pi \times 60 = 377$ rad $s^{-1}$)

(b) $\varepsilon_0 = NBA\omega = (500)(2.0 \times 10^{-3})(60 \times 10^{-4})(377)$ = **2.26 V**

(c) The plane is at 60° to B, so the normal is at $\theta = 30°$ to B: $\varepsilon = \varepsilon_0 \sin 30°$ = **1.13 V**


## Motor and dynamo: the same machine

- An **electric motor** is a coil in a magnetic field. A current in the coil makes forces $BIl$ on its two long sides, one up and one down, which turn the coil (Chapter 17). A **split-ring commutator** reverses the current every half turn, so the coil keeps turning the same way.
- A **dynamo** (like a bicycle dynamo) is the same machine used the other way round: you turn the coil, the flux through it changes, and an e.m.f. $\varepsilon = NBA\omega \sin \omega t$ is induced. With **slip rings** it gives a.c.; with a commutator the output is always in one direction (d.c.).
- In a working motor the turning coil also acts as a dynamo: it induces a back e.m.f. that opposes the supply (Lenz's law), which is why a motor takes a large current when it starts and a smaller one at full speed.

Simulation

## Motor and dynamo

As a motor: switch on the current and watch the forces BIl on the two long sides turn the coil, with the commutator swapping the current every half turn. As a dynamo: turn the handle faster or slower and see the lamp and the e.m.f. graph; switch between slip rings (a.c.) and a commutator (d.c.).

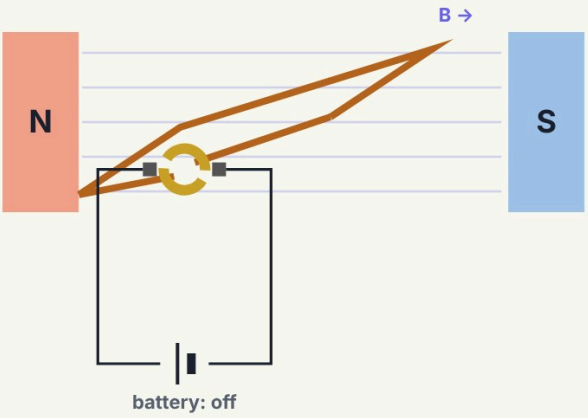


| turning effect | speed | commutator |
|---|---|---|
| **no current, no force** | **0.0 turns per second** | **reverses the current every half turn** |

This is a still picture. Open PhysiQ › Notes › Semester 2 › Chapter 18 to use the simulation.

## Exercise: Faraday's and Lenz's laws

1. A 200-turn coil of area 4.0 cm$^2$ is turned from a position where its plane is perpendicular to a 0.30 T field to one where its plane is parallel to it, in 0.050 s. Find the average e.m.f.

   **Answer**

   $\Delta\Phi = BA - 0$; $|\varepsilon| = NBA/\Delta t = (200)(0.30)(4.0 \times 10^{-4})/0.050 =$ **0.48 V**

   **FULL SOLUTION**

   Plane perpendicular to B: $\Phi_1 = BA$; plane parallel to B: $\Phi_2 = 0$. A = 4.0 cm$^2$ = 4.0 × 10$^{-4}$ m$^2$

   $\Delta\Phi = BA - 0 = (0.30)(4.0 \times 10^{-4}) = 1.2 \times 10^{-4}$ Wb

   $|\varepsilon| = N\Delta\Phi/\Delta t = (200)(1.2 \times 10^{-4}) / 0.050$

   = **0.48 V**

2. Explain, using energy, why the induced current must oppose the change that produces it.

   **Answer**

**If it helped the change, the motion would speed up by itself and electrical energy would appear without any work being done, breaking the conservation of energy. Because it opposes the change, work must be done, and that work becomes the electrical energy.**

> **FULL SOLUTION**
> Suppose the induced current **helped** the change (e.g. attracted an approaching magnet). The magnet would speed up by itself, and more and more electrical energy would appear without any work being done. This would **break the principle of conservation of energy**.
>
> Because the induced current **opposes** the change, an external agent must do work against it, and **that work is converted into the electrical energy** of the induced current. This is Lenz's law.

3. An aircraft with a wingspan of 40 m flies horizontally at 250 $\mathrm{m\,s^{-1}}$ where the vertical component of the Earth's field is $4.0 \times 10^{-5}$ T. Find the e.m.f. between its wing tips.

**Answer**

**$\varepsilon = Blv = (4.0 \times 10^{-5})(40)(250) =$ 0.40 V**

> **FULL SOLUTION**
> The wings cut the vertical component of the Earth's field: $\varepsilon = Blv$
>
> $\varepsilon = (4.0 \times 10^{-5})(40)(250)$
>
> = **0.40 V**

## 18.3 Self induction

**Self induction**

the **production of an induced e.m.f. in a coil because of a change of the current in the same coil**.

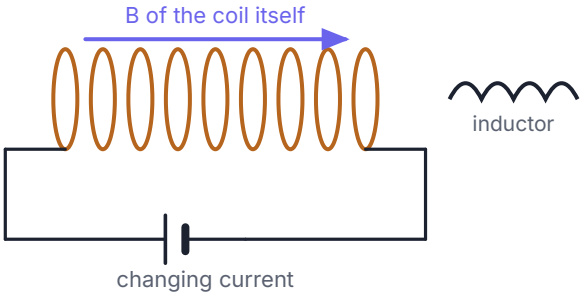



Figure 18.8: the coil's own changing field changes the flux linking it.

- The current in the coil produces a field and a flux through the coil itself. When the current changes, the flux changes and an e.m.f. is induced (a **back e.m.f.**).
- By Lenz's law it opposes the change: while the current is **rising** the induced e.m.f. opposes the current; while it is **falling** the induced e.m.f. acts in the direction of the current, trying to keep it flowing.
- A coil used for its self-inductance is called an **inductor**.

**Self-inductance, $L$**

the **ratio of the self-induced e.m.f. to the rate of change of current in the coil**: $L = -\varepsilon/(\mathrm{d}I/\mathrm{d}t)$.

Equivalently, the flux linkage per unit current, $L = N\Phi/I$.

$$\varepsilon = -L\frac{\mathrm{d}I}{\mathrm{d}t} \qquad LI = N\Phi$$

unit: henry (H) = Wb $A^{-1}$ = V s $A^{-1}$. A coil has L = 1 H if a current changing at 1 A $s^{-1}$ induces 1 V.

- $LI = N\Phi$ comes from Faraday's law: $-L\,\mathrm{d}I/\mathrm{d}t = -N\,\mathrm{d}\Phi/\mathrm{d}t$, integrated from zero current (and zero flux).
- $L$ depends on the size and shape of the coil, the number of turns and the core material; **not on the current**.

## Self-inductance of a solenoid

Field inside a long solenoid of $N$ turns and length $l$: $B = \dfrac{\mu_0 NI}{l}$.

Flux through each turn: $\Phi = BA = \dfrac{\mu_0 NIA}{l}$.

$L = \dfrac{N\Phi}{I} = \dfrac{N}{I} \times \dfrac{\mu_0 NIA}{l}$:

$$L = \frac{\mu_0 N^2 A}{l}$$

with a core of relative permeability $\mu_r$: $L = \mu_r\mu_0 N^2 A/l$

**Example 18.3.1**

The current in a 230 mH coil rises steadily from 20.0 mA to 28.0 mA in 140 ms. Find the induced e.m.f.

**Solution**

$\varepsilon = -L\dfrac{\Delta I}{\Delta t} = -(0.230)\dfrac{8.0 \times 10^{-3}}{0.140} =$ **$-1.3 \times 10^{-2}$ V** (it opposes the rising current)

**Example 18.3.2**

A solenoid of length 0.052 m and cross-sectional area $1.2 \times 10^{-3}\ \text{m}^2$ must have an inductance of 1.4 mH. How many turns does it need?

**Solution**

$$N = \sqrt{\frac{LI}{\mu_0 A}} = \sqrt{\frac{(1.4 \times 10^{-3})(0.052)}{(4\pi \times 10^{-7})(1.2 \times 10^{-3})}} = \mathbf{220\ \text{turns}}$$

**Example 18.3.3**

The current in a coil rises steadily from zero to 50.0 A in 10.0 s, inducing an e.m.f. of 45.0 V. Find (a) the self-inductance, (b) the flux linkage when the current is 50.0 A.

**Solution**

(a) $L = \dfrac{|\varepsilon|}{\mathrm{d}I/\mathrm{d}t} = \dfrac{45.0}{5.00} = \mathbf{9.00\ \text{H}}$

(b) $N\Phi = LI = (9.00)(50.0) = \mathbf{450\ \text{Wb}}$

**Example 18.3.4**

An air-cored solenoid of 450 turns, diameter 15.0 mm and length 12.0 cm carries 40.0 mA. Find (a) the field inside, (b) the flux through each turn, (c) the inductance.

**Solution**

(a) $B = \dfrac{\mu_0 NI}{l} = \dfrac{(4\pi \times 10^{-7})(450)(0.0400)}{0.120} = \mathbf{1.88 \times 10^{-4}\ \text{T}}$

(b) $\Phi = BA = (1.88 \times 10^{-4})\pi(7.50 \times 10^{-3})^2 = \mathbf{3.33 \times 10^{-8}\ \text{Wb}}$

(c) $L = \dfrac{N\Phi}{I} = \dfrac{(450)(3.33 \times 10^{-8})}{0.0400} = \mathbf{3.75 \times 10^{-4}\ \text{H}}$

# 18.4 Energy stored in an inductor

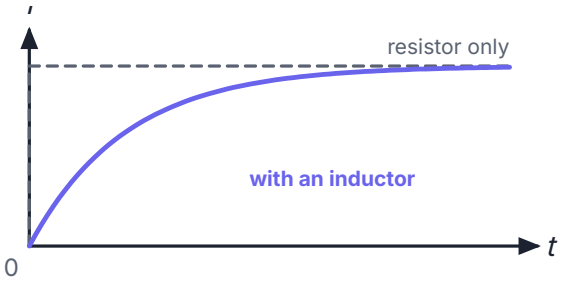



Figure 18.9: when the switch is closed, the back e.m.f. of an inductor makes the current rise gradually.

- While the current in an inductor is rising, a back e.m.f. opposes it. The source must do work to drive charge against this e.m.f.
- This work is not lost: it is **stored in the magnetic field** of the inductor. When the current is switched off, the energy is given back (this is why a spark can jump across a switch that breaks an inductive circuit).

## Deriving $U = \frac{1}{2}LI^2$

Power supplied against the back e.m.f.: $P = I|\varepsilon| = IL\dfrac{\mathrm{d}I}{\mathrm{d}t}$

Energy in a time $\mathrm{d}t$: $\mathrm{d}U = P\,\mathrm{d}t = LI\,\mathrm{d}I$

Total energy as the current rises from 0 to $I$: $U = \int_0^I LI\,\mathrm{d}I = \frac{1}{2}LI^2$

$$U = \tfrac{1}{2}LI^2$$

for a solenoid: $U = \frac{1}{2}\dfrac{\mu_0 N^2 A}{l}I^2$

Simulation

## Switching on an inductor

Close the switch and watch the current rise gradually while the back e.m.f. falls. Open it again and the stored energy ½LI² is given back. Change L and R: a larger L/R makes the rise slower.




| current I | back e.m.f. L dI/dt | energy stored ½LI² | supply e.m.f. |
|---|---|---|---|
| **0.00 A** | **0.00 V** | **0.00 J** | **6.0 V** |

This is a still picture. Open PhysiQ › Notes › Semester 2 › Chapter 18 to use the simulation.

Example 18.4.1

How much energy is stored in a 0.085 H inductor carrying 2.5 A?

Solution

$U = \tfrac{1}{2}LI^2 = \tfrac{1}{2}(0.085)(2.5)^2 = \mathbf{0.27\ J}$

**Example 18.4.2**

A steady current of 2.5 A in a coil of 500 turns produces a flux of $1.4 \times 10^{-4}$ Wb through each turn. Find (a) the average back e.m.f. if the current is stopped in 0.080 s, (b) the inductance, (c) the energy stored at 2.5 A.

**Solution**

(a) $|\varepsilon| = N\frac{\Delta\Phi}{\Delta t} = (500)\frac{1.4 \times 10^{-4}}{0.080} = \mathbf{0.88\ V}$

(b) $L = \frac{N\Phi}{I} = \frac{(500)(1.4 \times 10^{-4})}{2.5} = \mathbf{2.8 \times 10^{-2}\ H}$

(c) $U = \frac{1}{2}LI^2 = \frac{1}{2}(0.028)(2.5)^2 = \mathbf{8.8 \times 10^{-2}\ J}$

## 18.5 Mutual induction

**Mutual induction**

the **production of an induced e.m.f. in one coil because of a change of current in a neighbouring coil**.

- The changing current in the **primary** coil changes the flux linking the **secondary** coil, so an e.m.f. is induced in the secondary. (This is what Faraday saw when he switched the current on and off.)
- The transformer and the induction coil work by mutual induction.

**Mutual inductance, $M$**

the **ratio of the e.m.f. induced in one coil to the rate of change of current in the other coil**: $M = -\varepsilon_s/(\mathrm{d}I_p/\mathrm{d}t)$. Equivalently, the flux linkage of the secondary per unit current in the primary.

$$\varepsilon_s = -M\frac{\mathrm{d}I_p}{\mathrm{d}t} \qquad MI_p = N_s\Phi_s$$

unit: henry (H). M is the same whichever coil is called the primary.

## Two coaxial solenoids

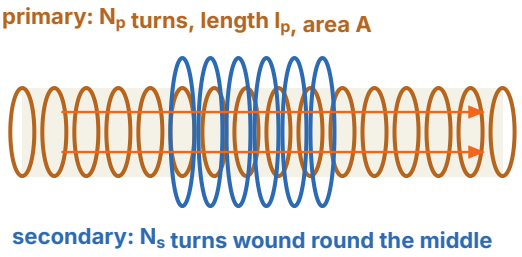



Figure 18.10: a short secondary coil wound round the middle of a long primary solenoid.

Field inside the primary: $B_p = \dfrac{\mu_0 N_p I_p}{l_p}$.

All of this flux passes through each turn of the secondary: $\Phi_s = B_p A = \dfrac{\mu_0 N_p I_p A}{l_p}$.

$M = \dfrac{N_s \Phi_s}{I_p}$:

$$M = \frac{\mu_0 N_p N_s A}{l_p}$$

$A$ = cross-sectional area of the primary; $l_p$ = length of the primary

**Example 18.5.1**

A primary solenoid of radius 2.0 cm and length 24 cm has 500 turns. A secondary coil of 80 turns is wound round its centre. Find (a) the mutual inductance, (b) the e.m.f. induced in the secondary when the primary current changes at 4.8 A $s^{-1}$.

**Solution**

(a) $M = \dfrac{\mu_0 N_p N_s A}{l_p} = \dfrac{(4\pi \times 10^{-7})(500)(80)\pi(0.020)^2}{0.24} = \mathbf{2.6 \times 10^{-4}\ H}$


(b) $|\varepsilon_s| = M\dfrac{dI_p}{dt} = (2.63 \times 10^{-4})(4.8) = \mathbf{1.3 \times 10^{-3}\ V}$

## A real use: transformers and power lines

- A **transformer** is two coils on one iron core. An **alternating** current in the primary makes a changing flux in the core, which induces an e.m.f. in the secondary by **mutual induction**. (A steady d.c. would give no changing flux and no output.)
- For an ideal transformer: $\frac{V_s}{V_p} = \frac{N_s}{N_p}$ and, with no energy lost, $V_p I_p = V_s I_s$.
- Power stations send electricity at very **high voltage** (132–400 kV). For the same power $P = VI$, a higher voltage means a **smaller current**, and the heat wasted in the cables, $I^2R$, falls with the **square** of the current.
- Step-up transformers raise the voltage at the power station; step-down transformers near our homes bring it back to 240 V.

*Simulation* **Transformers and power lines**

Send 20 MW from the power station to the town through cables of total resistance 4.0 Ω. Change the transmission voltage and watch the current, the heat lost in the cables and how bright the town is.

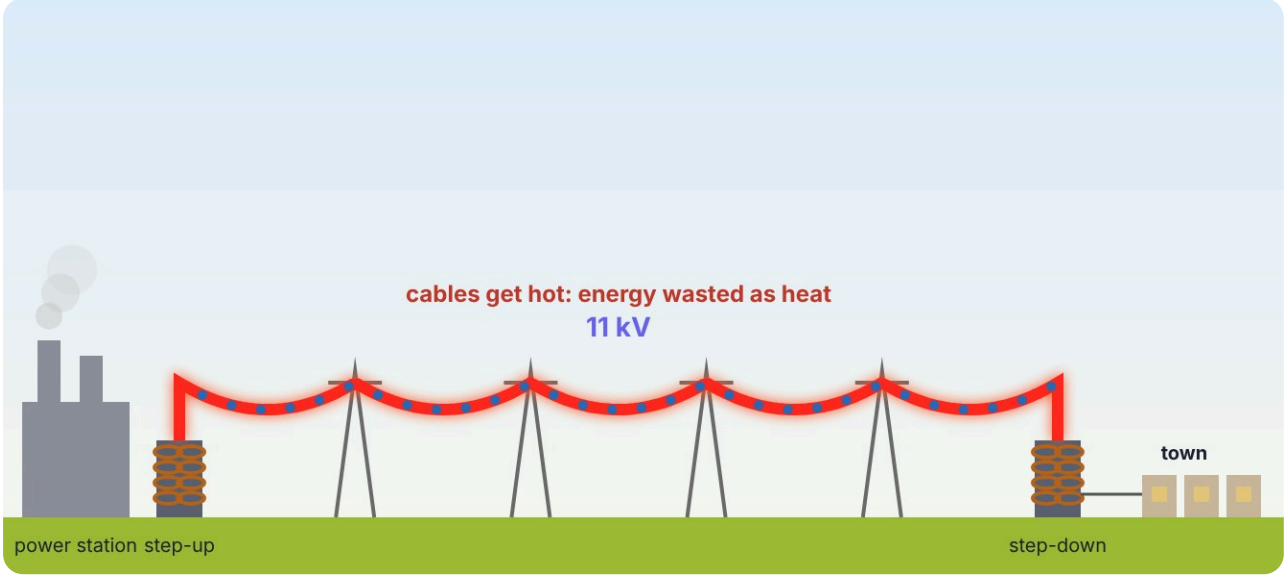


| current in the cables I = P/V | power lost $I^2R$ | fraction lost | step-up turns ratio Ns/Np (from 11 kV) |
|---|---|---|---|
| **1818 A** | **13.2 MW** | **66 %** | **1.0** |

step-down turns ratio Ns/Np (to 240 V)
**1 : 46**

This is a still picture. Open PhysiQ › Notes › Semester 2 › Chapter 18 to use the simulation.

**Example 18.5.2**

A power station sends 20 MW through cables of total resistance 4.0 Ω. Find the power lost in the cables if it is sent at (a) 11 kV, (b) 275 kV.

**Solution**

(a) $I = \dfrac{P}{V} = \dfrac{20 \times 10^6}{11 \times 10^3} = 1820$ A; $P_{\text{loss}} = I^2R = (1820)^2(4.0) =$ **13 MW** (two-thirds of the power!)

(b) $I = \dfrac{20 \times 10^6}{275 \times 10^3} = 72.7$ A; $P_{\text{loss}} = (72.7)^2(4.0) =$ **21 kW** (about 0.1%)

## Exercise: inductance

1. A solenoid 25 cm long has 1000 turns and a cross-sectional area of 4.0 cm$^2$. Find (a) its self-inductance, (b) the energy stored when it carries 3.0 A.

   **Answer**

   **(a) $L = \mu_0 N^2 A/l =$ 2.0 × 10$^{-3}$ H (b) $U = \tfrac{1}{2}LI^2 =$ 9.0 × 10$^{-3}$ J**

   **FULL SOLUTION**

   N = 1000, l = 0.25 m, A = 4.0 × 10$^{-4}$ m$^2$

   **(a)** $L = \mu_0 N^2 A/l = (4\pi \times 10^{-7})(1000)^2(4.0 \times 10^{-4}) / 0.25$

   = **2.0 × 10$^{-3}$ H**

   **(b)** $U = \tfrac{1}{2}LI^2 = \tfrac{1}{2}(2.01 \times 10^{-3})(3.0)^2$

   = **9.0 × 10$^{-3}$ J**

2. The current in the primary of a pair of coils (M = 0.15 H) falls steadily from 4.0 A to zero in 0.020 s. Find the e.m.f. induced in the secondary.

   **Answer**

   **$|\varepsilon| = M\Delta I/\Delta t = (0.15)(4.0/0.020) =$ 30 V**

   **FULL SOLUTION**

   $|\varepsilon| = M(\Delta I/\Delta t) = (0.15)(4.0 - 0) / 0.020$

   = **30 V**

3. State two differences between self induction and mutual induction.

   **Answer**

   **Self induction: the e.m.f. is induced in the same coil whose current changes, and it opposes the change of that current. Mutual induction: the e.m.f. is induced in a second coil, by a change of current in the first; it needs two coils linked by flux.**


FULL SOLUTION

**Self induction:** the e.m.f. is induced **in the same coil** whose current is changing, and it opposes the change of that current (only one coil is needed).

**Mutual induction:** the e.m.f. is induced **in a second coil** by a changing current in the first coil; it needs **two coils linked by magnetic flux**.

## Physics in Real Life

Real-world videos for this chapter. Tap a picture to play it here.

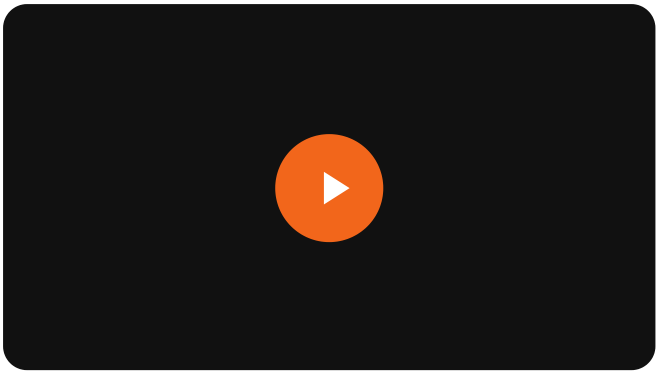

ENGINEERING EXPLAINER

How Japan's Maglev Train Works Open in YouTube ↗

### Japan's maglev train

Superconducting magnets on the moving train induce currents in coils beside the track; by Lenz's law the induced currents oppose the motion of the magnets, lifting and guiding the train.