

# **NRC7394 Application Note**

## **(Tree-based Mesh)**

### **Ultra-low power & Long-range Wi-Fi Module**

**Ver 1.0**  
**Apr. 5, 2023**

**NEWRACOM, Inc.**

## **NRC7394 Application Note (Tree-based Mesh) Ultra-low power & Long-range Wi-Fi Module**

**© 2023 NEWRACOM, Inc.**

All right reserved. No part of this document may be reproduced in any form without written permission from Newracom.

Newracom reserves the right to change in its products or product specification to improve function or design at any time without notice.

### **Office**

Newracom, Inc.

505 Technology Drive, Irvine, CA 92618 USA

<http://www.newracom.com>

# Contents

<b>1</b>	<b>Overview.....</b>	<b>5</b>
<b>2</b>	<b>Tree-based Mesh Operation .....</b>	<b>6</b>
<b>3</b>	<b>Setup Relay Operation .....</b>	<b>8</b>
3.1	Set SSID and IP address, DHCP region.....	8
3.2	Start Tree-based mesh station for 11ah Relay .....	9
<b>4</b>	<b>Revision History .....</b>	<b>15</b>


# List of Figures

Figure 1.1	Tree-based mesh network .....	5
Figure 2.1	Example of the Tree-based mesh used as a 11ah Relay.....	6
Figure 2.2	Network Topology with 2-hop relay .....	7
Figure 3.1	Parameters for hostapd in the configuration file .....	8
Figure 3.2	Parameters for IP & DHCP region in the script .....	8
Figure 3.3	Procedure of configuration for one-hop Relay.....	9
Figure 3.4	Results of running 11ah AP .....	10
Figure 3.5	Results of running 11ah Relay (STA operation) .....	11
Figure 3.6	Results of running 11ah Relay (AP operation) .....	12
Figure 3.7	Results of running 11ah STA .....	13
Figure 3.8	Adding route on 11ah AP and performing ping test between 11ah AP and STA .....	14

# 1 Overview

This document describes the Tree-based mesh and explains how to expand the coverage of 11ah using NRC7394 EVK and the Tree-based mesh. The Tree-based mesh of NRC7394 is only supported through its host mode.

As shown in Figure 1.1, the Tree-based mesh station supports the concurrent mode that enables the Tree-based mesh station to function as AP and STA at the same time. The concurrent mode operates in the same channel through the time-sharing method. In one Tree-based mesh station, another Tree-based mesh station or 11ah station can be attached.

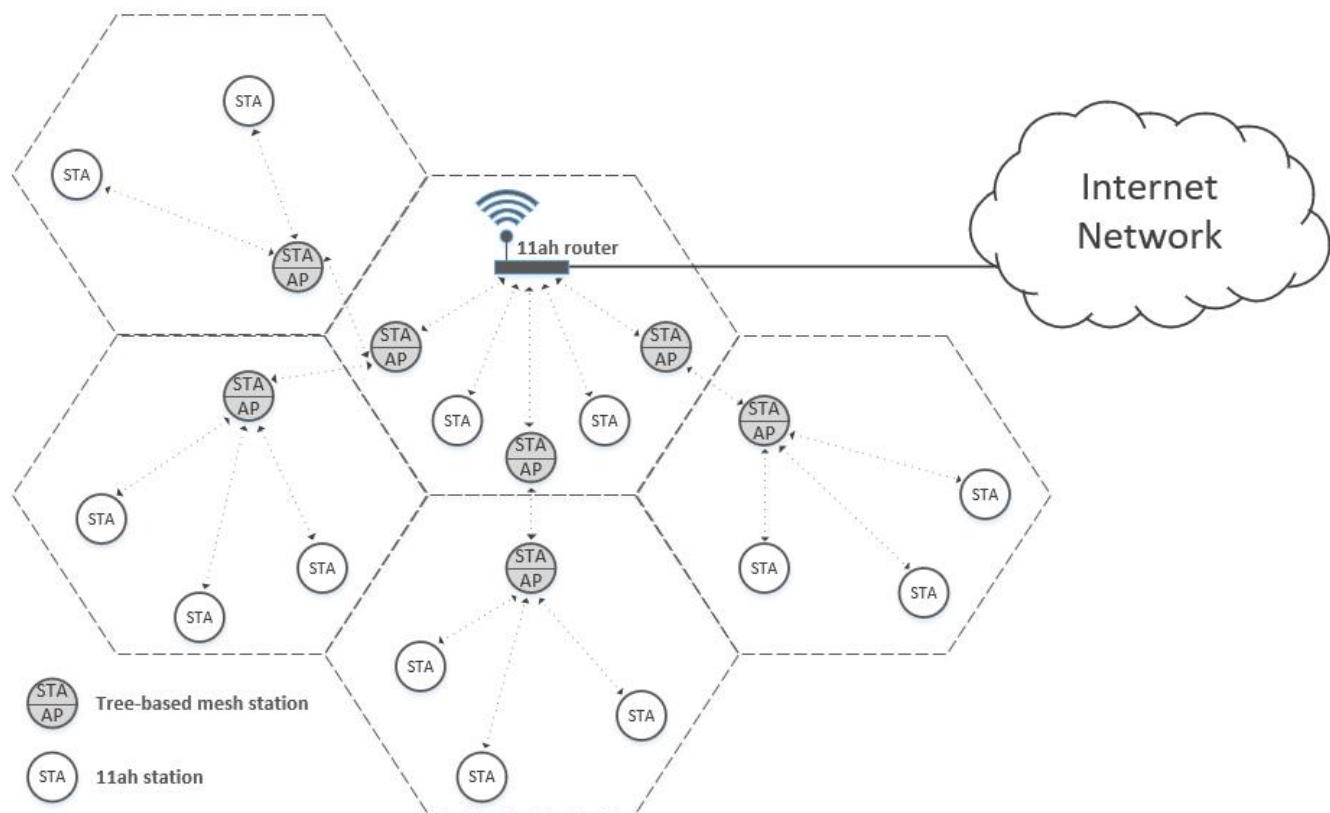

**Figure 1.1**    **Tree-based mesh network**





### 3 Setup Relay Operation

This chapter describes how to run Tree-based mesh station for 11ah Relay on the EVK in detail.

### 3.1 Set SSID and IP address, DHCP region

Since the Tree-based mesh station functions as AP and STA at the same time, the user must assign a new SSID to the Tree-based mesh station. The user can perform this task by writing the SSID of the Tree-based mesh station on the *ssid* parameter of the configuration file (e.g. `~/nrc_pkg/script/conf/US/ap_halow_open.conf`). Figure 3.1 shows an example of this procedure with the SSID, 'halow\_relay\_1'.

```
ctrl_interface=/var/run/hostapd
country_code=US
interface=wlan0
ssid=halow_relay_1
hw_mode=a
```

### Figure 3.1 Parameters for hostapd in the configuration file

Next, the user must set up the IP address and DHCP region to operate 11ah Relay in the 'CONFIG\_IP' file. The user can set up these by writing the *HALOW\_RELAY\_AP\_IP* and *HALOW\_RELAP\_AP\_DHCP\_CONFIG* parameters in the file shown in Figure 3.2.

```
# Config for HaLow Relay AP's IP and DHCP configuration (Only valid while running as RELAY)
HALOW_RELAY_AP_IP=192.168.150.1
HALOW_RELAY_AP_NETMASK=24
HALOW_RELAY_AP_DHCP_CONFIG=192.168.150.10,192.168.150.50,255.255.255.0,24h
```


### Figure 3.2 Parameters for IP & DHCP region in the script



### 3.2 Start Tree-based mesh station for 11ah Relay

For Tree-based mesh station to operate as 11ah Relay, there must be a 11ah AP that the 11ah Relay's STA can associate to within the 11ah AP's coverage. Once the 11ah Relay's STA successfully associates to the 11ah AP, the 11ah Relay can provide relay service to other 11ah STA around it.

To start Tree-based mesh station as a 11ah Relay, the user can run 'start.py' script by assigning the value '3' to the *sta\_type* parameter (refer to "NRC7394\_EVK\_User\_Guide\_HM" for other parameters).

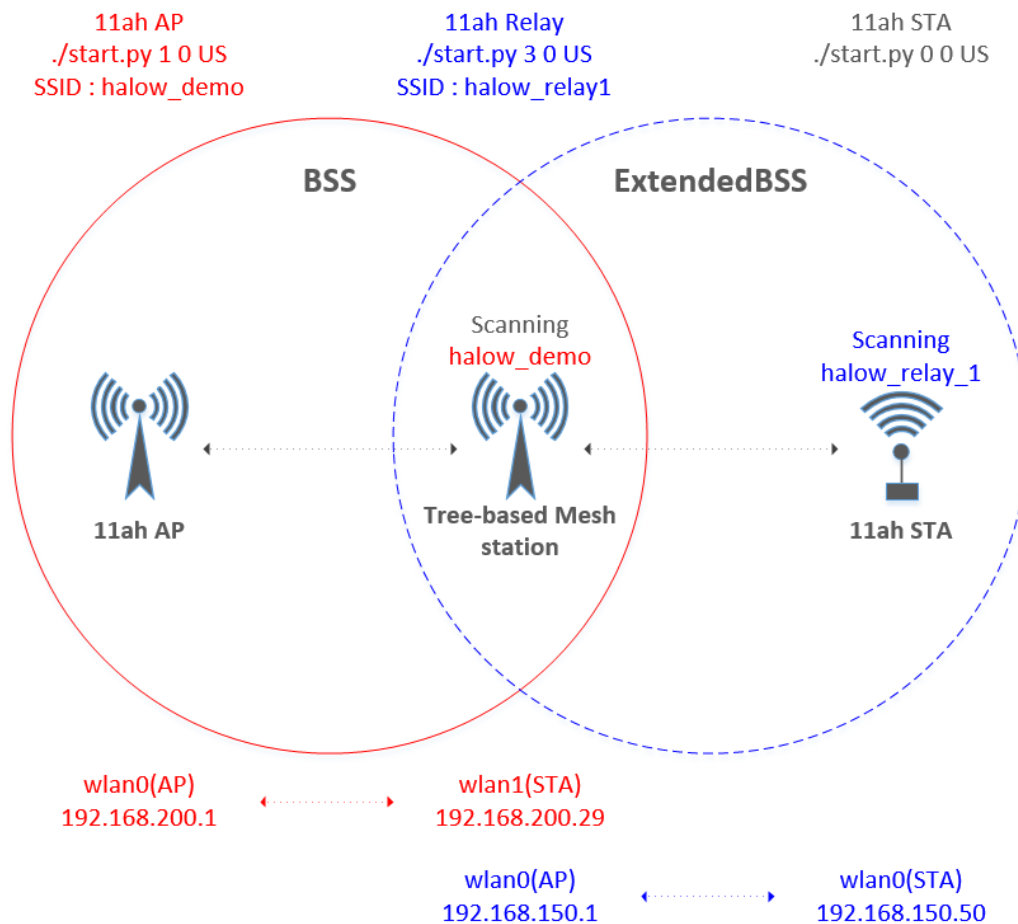

### Figure 3.3 Procedure of configuration for one-hop Relay

To configure one-hop Relay network as shown in Figure 3.3, user must start the 11ah AP, 11ah Relay, and 11ah STA in sequence. Figure 3.4 shows the result of starting 11ah AP by running 'start.py' script with giving '1' to *sta\_type* parameter.

```
pi@raspberrypi:~/nrc_pkg/script $ ./start.py 1 0 US
-----
Model           : 7292
STA Type        : AP
Security Mode   : OPEN
Country Selected : US
Download FW     : uni_slg.bin
TX Power        : 17
-----
NRC AP setting for HaLow...
[*] Set Max CPU Clock on RPi
1200000

-.-.-
-rw-r--r-- 1 root root 228664 Jul  1 21:30 /lib/firmware/uni_slg.bin
Config for AP is done!
done
[2] Loading module
sudo insmod ~/nrc_pkg/sw/driver/nrc.ko fw_name=uni_slg.bin disable_cqm=0 hifspeed=16000000
[3] Set tx power
nrf txpwr 17
success

wlan0: interface state COUNTRY_UPDATE->ENABLED
wlan0: AP-ENABLED
[7] Start NAT
[8] Start DNSMASQ
[9] ifconfig
eth0: flags=4163<UP,BROADCAST,RUNNING,MULTICAST> mtu 1500

lo: flags=73<UP,LOOPBACK,RUNNING> mtu 65536
    inet 127.0.0.1 netmask 255.0.0.0
    inet6 ::1 prefixlen 128 scopeid 0x10<host>
    loop txqueuelen 1000 (Local Loopback)
    RX packets 227 bytes 22946 (22.4 KiB)
    RX errors 0 dropped 0 overruns 0 frame 0
    TX packets 227 bytes 22946 (22.4 KiB)
    TX errors 0 dropped 0 overruns 0 carrier 0 collisions 0

wlan0: flags=4163<UP,BROADCAST,RUNNING,MULTICAST> mtu 1500
    inet 192.168.200.1 netmask 255.255.255.0 broadcast 192.168.200.255
    inet6 fe80::6154:4ff9:1632:e2a0 prefixlen 64 scopeid 0x20<link>
    ether 00:10:40:39:78:62 txqueuelen 1000 (Ethernet)
    RX packets 0 bytes 0 (0.0 B)
    RX errors 0 dropped 0 overruns 0 frame 0
    TX packets 25 bytes 3780 (3.6 KiB)
    TX errors 0 dropped 0 overruns 0 carrier 0 collisions 0

HaLow AP ready
Done.
```

**Figure 3.4 Results of running 11ah AP**

In the 2nd step, user must start the Tree-based mesh station as a 11ah Relay with the 'start.py' script by giving '3' to *sta\_type* parameter as shown in Figure 3.5. User also can find the 11ah Relay initiates the WPA supplicant, associates to 11ah AP, and get an IP address for wlan1 interface through the DHCP client.

```
pi@raspberrypi:~/nrc_pkg/script $ ./start.py 3 0 US
-----
Model       : 7292
STA Type    : RELAY
Security Mode : OPEN
Country Selected : US
Download FW : uni_slg.bin
TX Power    : 17
-----
NRC RELAY setting for HaLow...
[*] Set Max CPU Clock on RPi
1200000
1200000
1200000
1200000
Done
[0] Clear
wireshark-gtk: no process found
[1] Copy
total 460
drwxr-xr-x 2 pi pi 4096 Jul 3 20:14 .
drwxr-xr-x 4 pi pi 4096 Jul 3 20:14 ..
-rwxr-xr-x 1 pi pi 218 Jul 3 20:14 copy
-rwxr-xr-x 1 pi pi 228808 Jul 3 20:14 nrc7292_cspl.bin
-rwxr-xr-x 1 pi pi 228808 Jul 4 13:44 uni_slg.bin
-rw-r--r-- 1 root root 228808 Jul 4 13:44 /lib/firmware/uni_slg.bin
Config for RELAY is done!
done
[2] Loading module
sudo insmod ~/nrc_pkg/sw/driver/nrc.ko fw_name=uni_slg.bin disable_cqm=0 hifspeed=16000000
[2-1] Create wlan1 for concurrent mode
[3] Set tx power
nrf txpwr 17
success
[4] Set aggregation number
Input TID is (0)
set maxagg 1 8
success
[5] Set guard interval
set gi long
success
[6] Start wpa_supplicant
Successfully initialized wpa_supplicant
wlan1: SME: Trying to authenticate with 00:10:40:39:78:62 (SSID='halow_demo' freq=5765 MHz)
wlan1: Trying to associate with 00:10:40:39:78:62 (SSID='halow_demo' freq=5765 MHz)
wlan1: Associated with 00:10:40:39:78:62
wlan1: CTRL-Event-CONNECTED - Connection to 00:10:40:39:78:62 completed [id=0 id_str=]
wlan1: CTRL-Event-SUBNET-STATUS-UPDATE status=0
[7] Connect and DHCP
Waiting for IP
ip_address=192.168.200.29
IP assigned. HaLow STA ready
```

**Figure 3.5 Results of running 11ah Relay (STA operation)**





Once the setup for 11ah Relay is finished, user can start running a 11ah STA as shown in Figure 3.7. For the 11ah STA, user must give '0' to *sta\_type*.

```

pi@raspberrypi:~/nrc_pkg/script $ ./start.py 0 0 US
-----
Model           : 7292
STA Type        : STA
Security Mode    : OPEN
Country Selected : US
Download FW      : uni_slg.bin
TX Power        : 17
-----
NRC STA setting for HaLow...
[*] Set Max CPU Clock on RPi
1400000
1400000
1400000
1400000
Done
[0] Clear
hostapd: no process found
wireshark-gtk: no process found
[1] Copy
total 460
drwxr-xr-x 2 pi pi 4096 Jul 3 20:14 .
drwxr-xr-x 4 pi pi 4096 Jul 3 20:14 ..
-rwxr-xr-x 1 pi pi 218 Jul 3 20:14 copy
-rwxr-xr-x 1 pi pi 228808 Jul 3 20:14 nrc7292_csfi.bin
-rwxr-xr-x 1 pi pi 228808 Jul 3 20:54 uni_slg.bin
-rw-r--r-- 1 root root 228808 Jul 3 20:54 /lib/firmware/uni_slg.bin
Config for STA is done!
done
[2] Loading module
sudo insmod ~/nrc_pkg/sw/driver/nrc.ko fw_name=uni_slg.bin disable_cqm=0 hifspeed=16000000
[3] Set tx power
nrf txpwr 17
success
[4] Set aggregation number
Input TID is (0)
set maxagg 1 8
success
[5] Set guard interval
set gi long
success
[6] Start wpa supplicant
Successfully initialized wpa_supplicant
[7] Connect and DHCP
wlan0: SME: Trying to authenticate with 02:01:eb:cc:66:42 (SSID='halow_relay_1' freq=5765 MHz)
wlan0: Trying to associate with 02:01:eb:cc:66:42 (SSID='halow_relay_1' freq=5765 MHz)
wlan0: Associated with 02:01:eb:cc:66:42
wlan0: CTRL-Event-CONNECTED - Connection to 02:01:eb:cc:66:42 completed [id=0 id_str=]
wlan0: CTRL-Event-SUBNET-STATUS-UPDATE status=0
Waiting for IP
ip_address=192.168.150.50
IP assigned. HaLow STA ready
Done.

```

**Figure 3.7 Results of running 11ah STA**

If user successfully completes step 1 to 3, there is only one task left for communication between 11ah AP and STA. That is to add routing table on 11ah AP. This task should be done manually or by using 'add\_route.sh' script as below. The parameter for this script is the last number of IP address of 11ah Relay node.

Figure 3.8 shows a way to add routing table with 'add\_route.sh' and the success of the ping test after this task.

```
pi@raspberrypi:~/nrc_pkg/script $ route
Kernel IP routing table
Destination        Gateway            Genmask           Flags Metric Ref    Use Iface
default            192.168.3.1       0.0.0.0           UG        202    0      0 eth0
192.168.3.0        0.0.0.0           255.255.255.0     U         202    0      0 eth0
192.168.200.0      0.0.0.0           255.255.255.0     U         312    0      0 wlan0
pi@raspberrypi:~/nrc_pkg/script $ ./conf/etc/add_route.sh 29
Kernel IP routing table
Destination        Gateway            Genmask           Flags Metric Ref    Use Iface
default            192.168.3.1       0.0.0.0           UG        202    0      0 eth0
192.168.3.0        0.0.0.0           255.255.255.0     U         202    0      0 eth0
192.168.150.0      192.168.200.29    255.255.255.0     UG        0       0      0 wlan0
192.168.200.0      0.0.0.0           255.255.255.0     U         312    0      0 wlan0
Done
pi@raspberrypi:~/nrc_pkg/script $ ping 192.168.150.50 -c 10
PING 192.168.150.50 (192.168.150.50) 56(84) bytes of data.
64 bytes from 192.168.150.50: icmp_seq=1 ttl=63 time=18.5 ms
64 bytes from 192.168.150.50: icmp_seq=2 ttl=63 time=12.7 ms
64 bytes from 192.168.150.50: icmp_seq=3 ttl=63 time=14.1 ms
64 bytes from 192.168.150.50: icmp_seq=4 ttl=63 time=25.4 ms
64 bytes from 192.168.150.50: icmp_seq=5 ttl=63 time=23.1 ms
64 bytes from 192.168.150.50: icmp_seq=6 ttl=63 time=28.1 ms
64 bytes from 192.168.150.50: icmp_seq=7 ttl=63 time=15.0 ms
64 bytes from 192.168.150.50: icmp_seq=8 ttl=63 time=15.9 ms
64 bytes from 192.168.150.50: icmp_seq=9 ttl=63 time=18.8 ms
64 bytes from 192.168.150.50: icmp_seq=10 ttl=63 time=14.0 ms

--- 192.168.150.50 ping statistics ---
10 packets transmitted, 10 received, 0% packet loss, time 9013ms
rtt min/avg/max/mdev = 12.749/18.605/28.105/5.031 ms
```

**Figure 3.8 Adding route on 11ah AP and performing ping test between 11ah AP and STA**

## 4 Revision History

Revision No	Date	Comments
Ver 1.0	4/5/2023	Initial version