


USB-C, ESD, 500 mA fuse

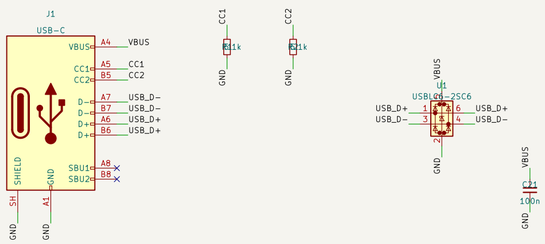

Power mux: jack 5 V first, USB otherwise




3.3 V LDO, power LED

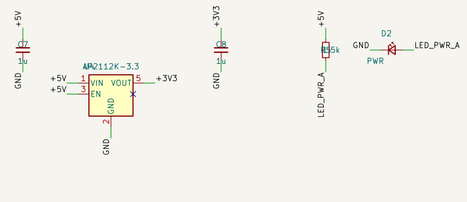


Uno R3 shield headers and ICSP



Barrel jack, reverse-polarity diode, 5 V buck

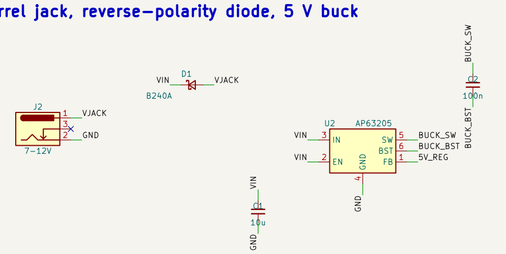


ATmega328P, 16 MHz crystal, decoupling

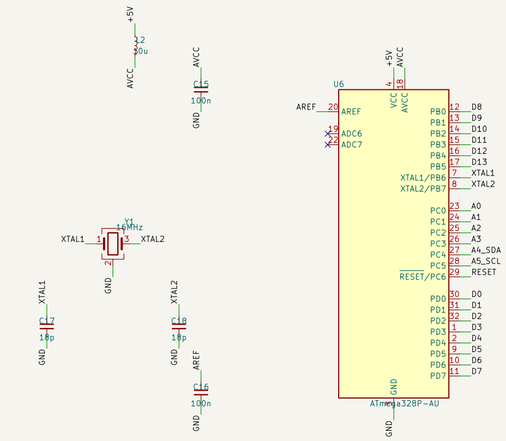


L LED on D13, buffered

USB-UART (CH340C), DTR auto-reset

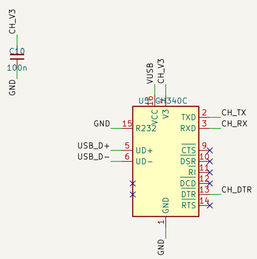


Power nets

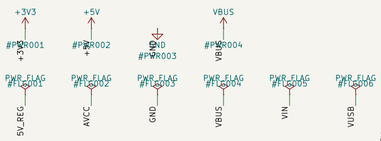

Reset (AN2519)



VUSB isolation buffers

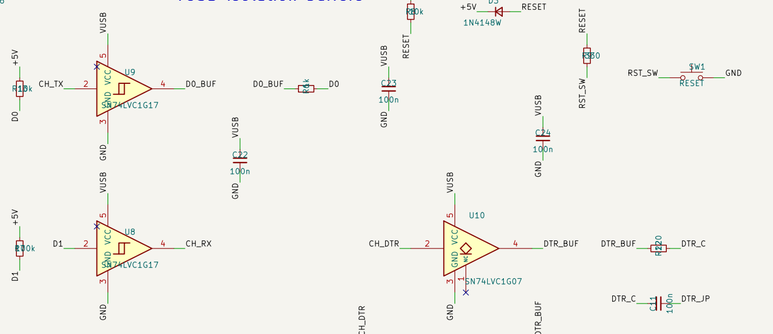

Mounting holes



Power: USB-C 5 V through F1, or 7-12 V on J2 through D1 and the AP63205.
U3 picks the jack's 5 V whenever it is present and blocks reverse current,
so neither input, nor 5 V fed into the 5V pin, back-feeds the other.

EoS ATmega328P Board, rev A. Designed by Kartikeydheer Srivastava. Fits Uno R3 shields.
Copyright (c) 2026 Kartikeydheer Srivastava. All rights reserved; see LICENSE.txt.
Values from Microchip DS40002061B and AN2519, WCH CH340 V3D, TI SLVSFG1A (TPS2116),
TI SCES351Y and SCES296AG (buffers), Diodes DS41326 (AP63205) and DS39724 (AP2112),
ECS ECX-33Q (crystal, CL 12 pF -> 18 pF). Low fuse 0xFF (low-power crystal oscillator).
JP1 (bridged as delivered) joins the DTR# auto-reset to RESET: cut it for debugWIRE.

Uno R3 mounting holes (3.20 mm at 15.24 / 2.54 / 66.04 / 17.78 / 45.72 / 50.80 mm); Arduino U
Uno R3 outline (2700 x 2100 mil), shield header positions, ICSP pin 1 at (2505, 1200) mil and mour
Generated by tools/eos_boards from the board's design file
Copyright (c) 2026 Kartikeydheer Srivastava. Licence: All rights reserved

Kartikeydheer Srivastava		
Sheet: /		
File: eos-atmega328p-board.kicad_sch		
Title: EoS ATmega328P Board		
Size: A2	Date: 2026-10-12	**Rev: A**
KiCad E.D.A. 10.0.6		Id: 1/1