Gears, motor and first power

antocciphysics

Name: _____ **Block:** _____ (teacher only) **Mastery Rating:** _____

LEARNING TARGET Compare a gear-based prediction with a supervised first powered test.

SUCCESS CRITERIA - I can...

1. Check gear mesh and secure connections before power.
2. Calculate ideal wheel speed from measured or supplied rpm.
3. Document first-test evidence and one revision.

Core: teacher selects from 1-7. **Stretch:** 8 after checking your work.

MARZANO SELF-CHECK

① Need help starting

② Can do part; need help

③ Solve and explain with allowed supports

LANGUAGE GOAL Use “circumference” and “gear ratio” to compare your model or result. Sentence starters are optional.

circumference: distance around the edge of a circle

gear ratio: a comparison of gear tooth counts or rotation rates

assumption: a condition accepted for using a model

01 Bring back an earlier idea

A 30-tooth driver turns a 150-tooth gear.
Give ideal output/input torque and speed ratios and state the loss assumption.

Word help: torque = the turning effect of a force about an axis

Sentence starter: Under the assumption ..., the evidence ... supports ... because ... .

Marzano check - circle: ① ② ③

02 Explain a worked example

Reference: rotation rate = turns/Δt
v = circumference × rotation rate.
Turns per second, no slip. Get first-power approval; secure car and keep loose items clear. Disconnect before adjusting gears.

Worked reasoning: Supplied wheel tests show 4 rotations in 2 s. With circumference 0.20 m and no slip, predicted speed is(4/2)×0.20=0.40 m/s. Ground speed may differ if wheels slip.

Your turn: Draw one wheel rotation and the predicted travel distance.
Identify the no-slip assumption.


Sentence starter: I predict ... . My model supports this because ... .

Marzano check - circle: ① ② ③

03 Represent and interpret

Sketch your driver and driven gears.
Label tooth counts and identify the driven axle. Note any rubbing or loose mesh before power.

Sentence starter: The ... in my model represents ... . Its label shows ... .

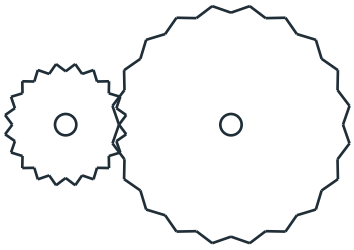

Marzano check - circle: ① ② ③

04 Solve and justify

A motor’s measured loaded speed is 480 rpm with a 12-tooth driver and 36-tooth driven gear. Wheel diameter is .050 m.
Predict ideal speed and time over 3.0 m.

Word help: ideal = using stated simplifying conditions

Sentence starter: I predict ... . My model supports this because ... .

Marzano check - circle: ① ② ③

Gears, motor and first power

antocciphysics

Continue down each column.

Sentence starters are optional. You may plan in any language.

05 Analyze the reasoning

The actual car is slower than the prediction.
Name two assumptions to check and one measurement that could separate their effects.

Sentence starter: I predict … . My model supports this because … .

Marzano check - circle: 1 2 3

06 Choose a method

A bar magnet is cut into 4 pieces. Does this produce isolated north and south poles?
Sketch the usual result.

Sentence starter: The … in my model represents … . Its label shows … .

Marzano check - circle: 1 2 3

07 Exit check

A no-load motor rate is 600 rpm and loaded rate is 450 rpm. Compute the relative reduction and explain why no-load rpm overpredicts travel speed.

Sentence starter: I predict … . My model supports this because … .

Marzano check - circle: 1 2 3

08 STRETCH: Apply it another way

A wheel of radius 0.025 m rotates at 240 rpm.
Find ideal ground speed. Measured speed is 0.50 m/s; find the ratio measured/ideal and avoid treating that ratio alone as proof of slip.

Word help: ideal = using stated simplifying conditions

Sentence starter: I found … [unit]. This value means … in this situation.

Marzano check - circle: 1 2 3