




















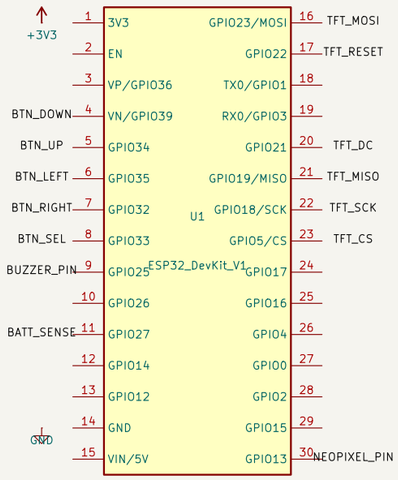





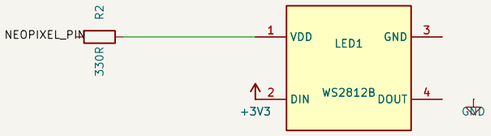

BREADBOARD WIRING INSTRUCTIONS:

1. Place the ESP32 DevKit straddling the center trough (gap) of the breadboard.

ect Breadboard Left Red Rail to ESP32 3V3 pin (+3.3V) and Blue Rail to ESP32 GND pin.

buttons connect between their designated GPIO pin and the GND rail (uses internal pull-ups).

4. Connect TFT VCC & LED to +3.3V rail. Connect TFT GND to GND rail.

TFT SPI lines: CS->GPIO5, DC->GPIO21, RST->GPIO22, SDI(MOSI)->GPIO23, SCK->GPIO18.

Connect Buzzer (+) through 100-ohm resistor to GPIO32; Buzzer (-) to GND rail.

WS2812B NeoPixel DIN through 330-ohm resistor to GPIO13; VDD to +3.3V; GND to GND rail.

: LiPo Battery -> TP4056 Module -> Slide Switch -> 3.3V LDO Regulator -> Breadboard Rails.

Power: 3.7V LiPo + TP4056 + Low-Dropout 3.3V Regulator
Controls: 5 Pushbuttons, Piezo Buzzer, WS2812B RGB LED
Target: Breadboard Assembly with ESP32 & 3.3" TFT
Antigravity Embedded

Sheet: /
File: mini_arcade.kicad_sch

Title: Mini Casino Arcade — Breadboard Schematic

Size: A3	Date: 2026-10-28	**Rev: v1.0**
KiCad E.D.A. 10.0.6		Id: 1/1