


USB-C Receptacle + Protection

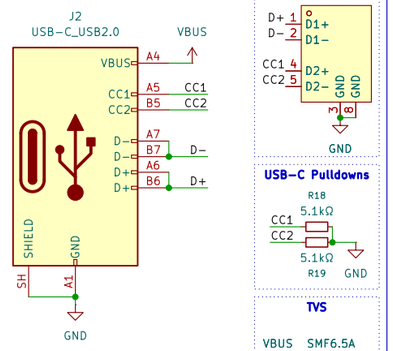


BMS

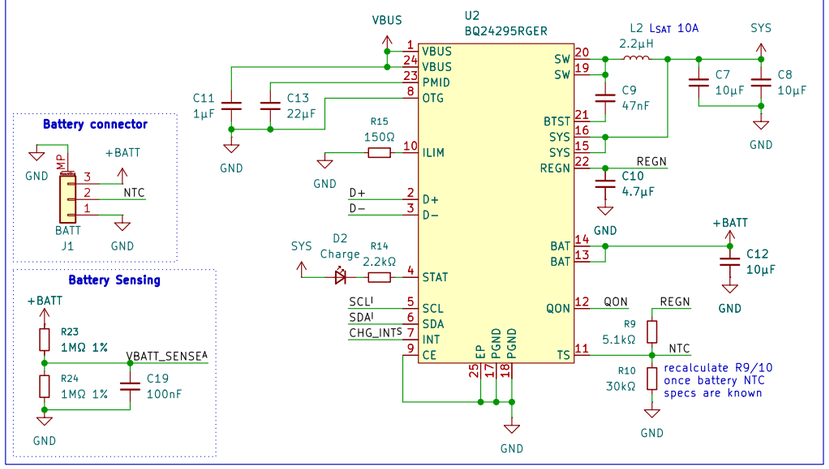


ATtiny 1616

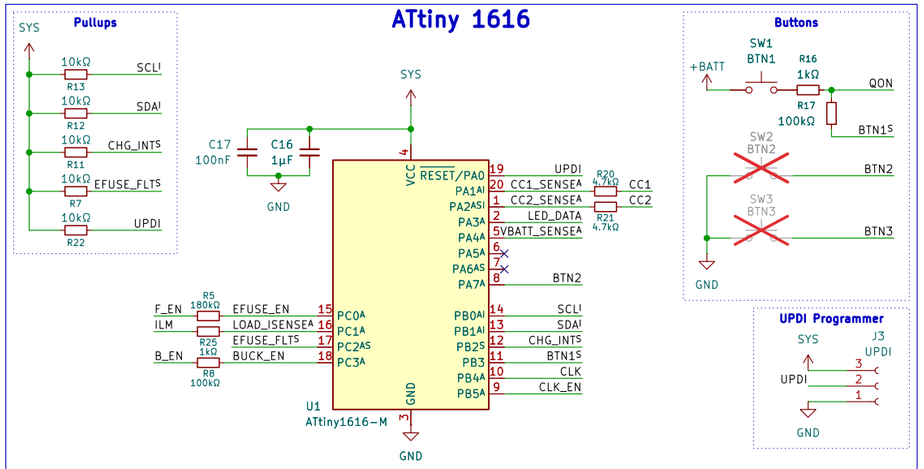


3.3V Buck

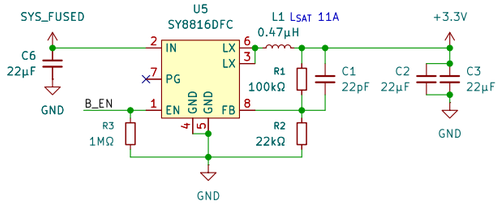


RGB LEDs

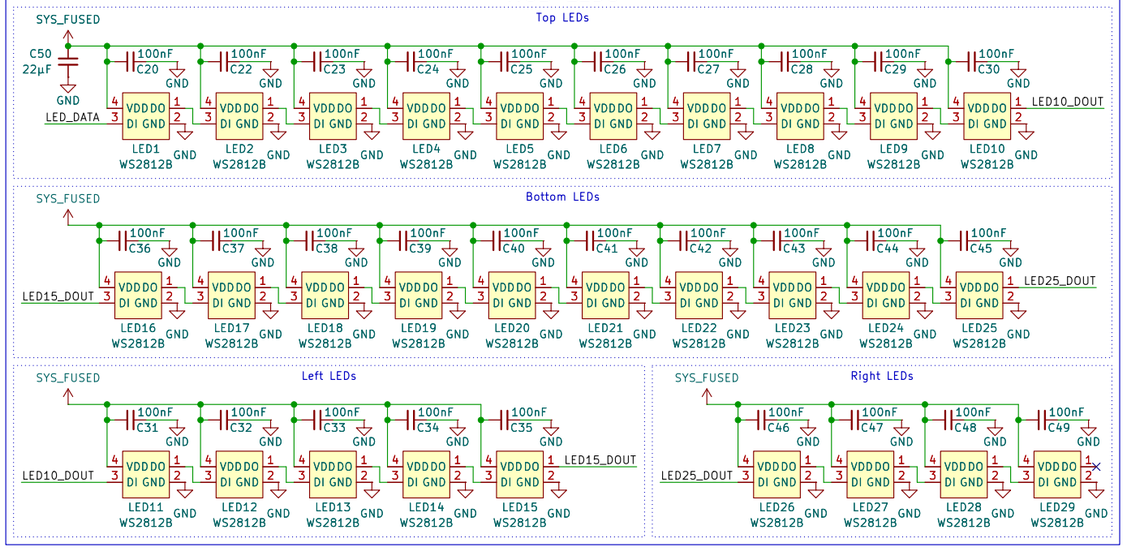

CLK Driver



Board to Board Connector




Notes

Battery
1S LiPo 130 x 90 x 8 mm
~12500mAh cell

Charging
Input: USB-C 5V (no PD)
2A default, 3A max

Protection
USB TVS and ESD
5.5A Battery shutoff
3.8A EFuse shutoff
BMS Shipping mode

E-Fuse

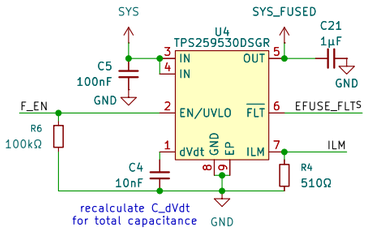

Beehive Engineering

Sheet: /
File: 4x7 Display.kicad_sch

Title: 4x7 Minibadge Display

Size: A3	Date: 2026-11-08	**Rev: R1**
KiCad E.D.A. 10.0.7		Id: 1/1