# Guangzhou HC Information Technology Co., Ltd.

# **Product Data Sheet**

Module Data Sheet

### Rev 1

1. 0	2.0	2.1	2.2		
2006/6/18	2006/9/6	2010/4/22	2011/4/6		

DRAWN BY:	Ling Xin		MODEL: HC-06		
CHECKED BY:	Eric Huang		Description:: BC04 has external 8M Flash and EDR module HC-06 is industrial, and compatible with civil HC-04		
APPD. BY:	Simon Mok		<b>REV: 2.0</b>	Page:	
Former version introduction	HC-06 is the higher version of LV_BC_2.0. Linvor is the former of wavesen.				

www.wavesen.com Phone: 020-84083341 Fax: 020-84332079 QQ:1043073574

Address: Room 527, No.13, Jiangong Road, Tianhe software park, Tianhe district, Guangzhou Post: 510660

Technology consultant: <a href="mailto:support@wavesen.com">support@wavesen.com</a>
Business consultant: <a href="mailto:support@wavesen.com">support@wavesen.com</a>

### **Contents**

- 1. Product's picture
- 2. Feature
- 3. Pins description
- 4. The parameters and mode of product
- 5. Block diagram
- 6. Debugging device
- 7. Characteristic of test
- 8. Test diagram
- 9. AT command set

# 1. Product's picture

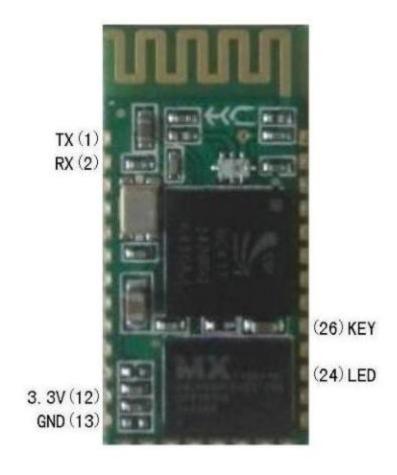


Figure 1 A Bluetooth module



Figure 2. A Bluetooth module size

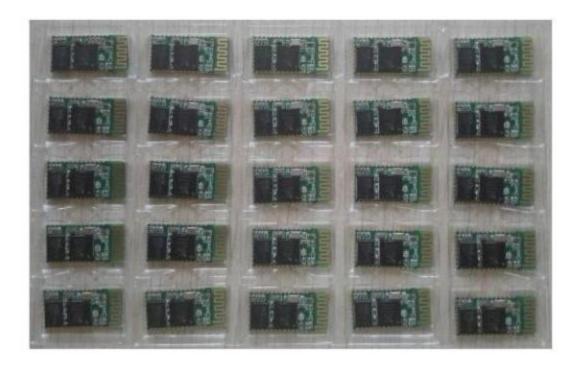


Figure 3 25 pieces chips in an anti-static blister package.

Complaint and suggestion: sunbirdit@hotmail.com

### 2. Feature

- Wireless transceiver
  - Sensitivity (Bit error rate) can reach -80dBm.
  - The change range of output's power: -4 +6dBm.
- Function description (perfect Bluetooth solution)
  - Has an EDR module; and the change range of modulation depth: 2Mbps 3Mbps.
  - Has a build-in 2.4GHz antenna; user needn't test antenna.
  - ➤ Has the external 8Mbit FLASH
  - Can work at the low voltage (3.1V $\sim$ 4.2V). The current in pairing is in the range of 30 $\sim$ 40mA. The current in communication is 8mA.
  - Standard HCI Port (UART or USB)
  - ➤ USB Protocol: Full Speed USB1.1, Compliant With 2.0
  - This module can be used in the SMD.
  - It's made through RoHS process.
  - $\triangleright$ The board PIN is half hole size.
  - Has a 2.4GHz digital wireless transceiver.
  - Bases at CSR BC04 Bluetooth technology.
  - Has the function of adaptive frequency hopping.
  - Small  $(27\text{mm} \times 13\text{mm} \times 2\text{mm})$
  - Peripherals circuit is simple.
  - ➤ It's at the Bluetooth class 2 power level.
  - Storage temperature range:  $-40 \,^{\circ}\text{C} 85 \,^{\circ}\text{C}$ , work temperature range:  $-25 \,^{\circ}\text{C} +75 \,^{\circ}\text{C}$
  - Any wave inter Interference: 2.4MHz, the power of emitting: 3 dBm.
  - ➤ Bit error rate: 0. Only the signal decays at the transmission link, bit error may be produced. For example, when RS232 or TTL is being processed, some signals may decay.

Post: 510660

- Low power consumption
- Has high-performance wireless transceiver system
- Low Cost

www.wavesen.com Phone: 020-84083341 Fax: 020-84332079 QQ:1043073574 Address: Room 527, No.13, Jiangong Road, Tianhe software park, Tianhe district, Guangzhou Business consultant:sales@wavesen.com

### • Application fields:

- ➤ Bluetooth Car Handsfree Device
- Bluetooth GPS
- ➤ Bluetooth PCMCIA, USB Dongle
- Bluetooth Data Transfer
- Software
  - > CSR

### 3. PINs description

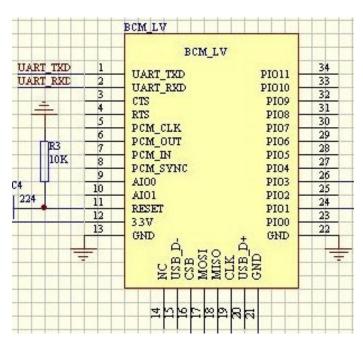


Figure 3 PIN configuration

The PINs at this block diagram is as same as the physical one.

PIN Name	PIN#	Pad type	Description	Note
GND	13 21 22	VSS	Ground pot	
1V8	14	VDD	Integrated 1.8V (+) supply with On-chip linear regulator output within 1.7-1.9V	
VCC	12	3.3V		
AIO0	9	Bi-Directional	Programmable input/output line	
AIO1	10	Bi-Directional	Programmable input/output line	

www.wavesen.com Phone: 020-84083341 Fax: 020-84332079 QQ:1043073574

Address: Room 527, No.13, Jiangong Road, Tianhe software park, Tianhe district, Guangzhou Post: 510660

Technology consultant: <a href="mailto:support@wavesen.com">support@wavesen.com</a>
Business consultant: <a href="mailto:support@wavesen.com">support@wavesen.com</a>

	23	Bi-Directional	Programmable input/output line,	
PIO0		RX EN	control output for LNA(if fitted)	
DIO1	2.1	Bi-Directional	Programmable input/output line,	
PIO1	24	TX EN	control output for PA(if fitted)	
PIO2	25	Bi-Directional	Programmable input/output line	
PIO3	26	Bi-Directional	Programmable input/output line	
PIO4	27	Bi-Directional	Programmable input/output line	
PIO5	28	Bi-Directional	Programmable input/output line	
PIO6	29	Bi-Directional	Programmable input/output line	CLK_REQ
PIO7	30	Bi-Directional	Programmable input/output line	CLK_OUT
PIO8	31	Bi-Directional	Programmable input/output line	
PIO9	32	Bi-Directional	Programmable input/output line	
PIO10	33	Bi-Directional	Programmable input/output line	
PIO11	34	Bi-Directional	Programmable input/output line	
		CMOS Input with		
RESETB	11	weak intemal		
		pull-down		
	4	CMOS output,		
UART_RTS		tri-stable with weak	UART request to send, active low	
		internal pull-up		
	3	CMOS input with		
UART_CTS		weak internal	UART clear to send, active low	
		pull-down		
	Γ_RX 2	CMOS input with		
UART_RX		weak internal	UART Data input	
		pull-down		
		CMOS output,		
UART_TX	1	Tri-stable with	UART Data output	
UAKI_IA	1	weak internal	OAKI Data output	
		pull-up		
		CMOS input with		
SPI_MOSI	17	weak internal	Serial peripheral interface data input	
		pull-down		
SPI_CSB	16	CMOS input with	Chip select for serial peripheral	
21 I_C2D	SB 16	weak internal	interface, active low	

<u>www.wavesen.com</u> Phone: 020-84083341 Fax: 020-84332079 QQ:1043073574 Address: Room 527, No.13, Jiangong Road, Tianhe software park, Tianhe district, Guangzhou Fechnology consultant: <a href="mailto:support@wavesen.com">support@wavesen.com</a>
Business consultant: <a href="mailto:support@wavesen.com">support@wavesen.com</a> Post: 510660

Complaint and suggestion:  $\underline{sunbirdit@hotmail.com}$ 

		pull-up		
SPI_CLK	19	CMOS input with weak internal pull-down	Serial peripheral interface clock	
SPI_MISO	18	CMOS input with weak internal pull-down	Serial peripheral interface data Output	
USB	15	Bi-Directional		
USB_+	20	Bi-Directional		
1.8V	14		1.8V external power supply input	Default: 1.8V internal powe r supply.
PCM_CLK	5	Bi-Directional		
PCM_OUT	6	CMOS output		
PCM_IN	7	CMOS Input		
PCM_SYNC	8	Bi-Directional		

<u>www.wavesen.com</u> Phone: 020-84083341 Fax: 020-84332079 QQ:1043073574 Address: Room 527, No.13, Jiangong Road, Tianhe software park, Tianhe district, Guangzhou Fechnology consultant: <a href="mailto:support@wavesen.com">support@wavesen.com</a>
Business consultant: <a href="mailto:support@wavesen.com">support@wavesen.com</a> Post: 510660

Complaint and suggestion:  $\underline{sunbirdit@hotmail.com}$ 

# 4. The parameters and mode of product

LINVOR BLUE T



www. linvor.com

CSR,BC417143B V 2.0 2006/09/6

蓝牙 RF 模块

- 1. 采用 CSR BC4 +8M FLASH 方案
- 具有 PIO0-PIO11、AIO0、AIO1、 USB、PCM、UART 及 SPI 接口, 模块内置 8MFLASH,功能强大, 用户可定制软件,适用于各种蓝牙 设备,内置 RF 天线,便于调试。

Bluetooth Specification V2.0 With EDR
Full Speed USB V1.1
Compliant With USB V2.0
2.4Ghz ISM band
GFSK(Gaussian Frequency Shift Keying)
-4 ->4 dBm, Class 2
≦-80dBm at 0.1% BER
Asynchronous:2Mbps(Max)
3.3V
-20~+55 Centigrade
27mmX13mmX2mm

Page 1of 2

If you want more information, please visit www.wavesen.com.

www.wavesen.com Phone: 020-84083341 Fax: 020-84332079 QQ:1043073574

Address: Room 527, No.13, Jiangong Road, Tianhe software park, Tianhe district, Guangzhou Post: 510660


Technology consultant: <a href="mailto:support@wavesen.com">support@wavesen.com</a>
Business consultant: <a href="mailto:support@wavesen.com">support@wavesen.com</a>

LINVOR BLUE T

www. linvor.com

LV-BC-2.0

单位: mm

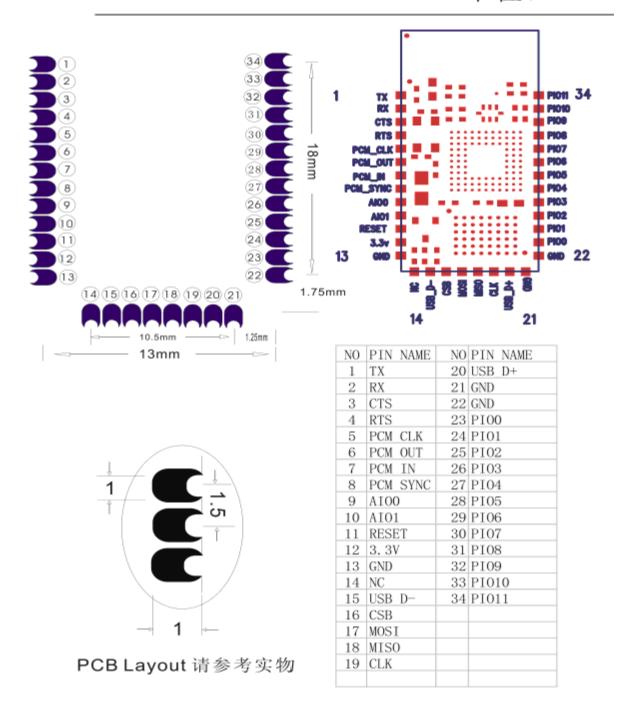

www.wavesen.com Phone: 020-84083341 Fax: 020-84332079 QQ:1043073574

Address: Room 527, No.13, Jiangong Road, Tianhe software park, Tianhe district, Guangzhou Post: 510660 Technology consultant: <a href="mailto:support@wavesen.com">support@wavesen.com</a>
Business consultant: <a href="mailto:support@wavesen.com">support@wavesen.com</a>

### 5. Block diagram

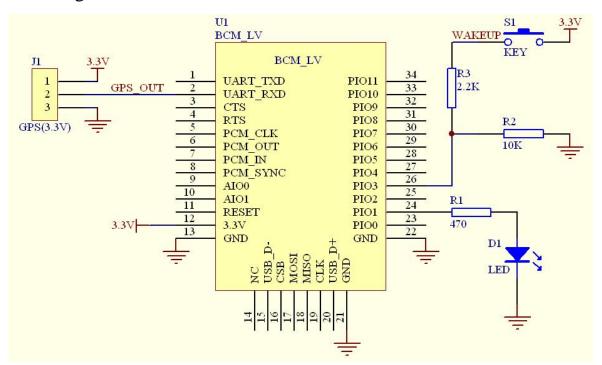


Figure 5 Block diagram 1

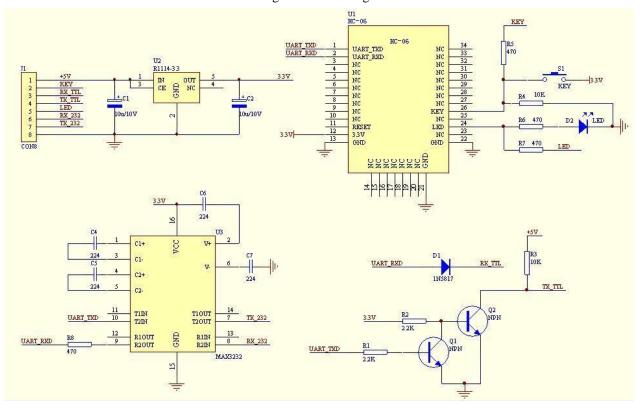


Figure 5 Block diagram 2

www.wavesen.com Phone: 020-84083341 Fax: 020-84332079 QQ:1043073574

Address: Room 527, No.13, Jiangong Road, Tianhe software park, Tianhe district, Guangzhou Post: 510660 Technology consultant: <a href="mailto:support@wavesen.com">support@wavesen.com</a> Business consultant: <a href="mailto:support@wavesen.com">support@wavesen.com</a>

Complaint and suggestion: sunbirdit@hotmail.com

HC-04/06 master device has a function of remembering the last paired slave device. As a master device, it will search the last paired salve device until the connection is built. But if the WAKEUP bottom is pressed, HC-04/06 will lose the memory and research the new slave device.

### 6. Debugging device

#### 6.1 Device

PC, hardware, 3G, 3G Frequency Counter (SP3386), 3.15V DC power supply, Shielding, Bluetooth Test box.

6.2 Software

### 7. Characteristic of test

		<b>Test Condition 25°</b> CRH			I 65%	
		Min	Typ	Max	Unit	
1.	Carrier Freq. (ISM Band)	2.4		2.4835	MHz	
2.	RF O/P Power	-6	2	4	dBm	
3.	Step size of Power control	2		8	dB	
4.	Freq. Offset ( Typical Carrier freq.)	-75		75	KHz	
<u>5.</u>	Carrier Freq. drift ( Hopping on, drift rate/50uS )	-20		20	KHz	
	1 slot packet	-25		25	KHz	
	3 slot packet	-40		-40	KHz	
6.	Average Freq. Deviations ( Hopping off, modulation	ı) 140		175	KHz	
	Freq. Deviation	115			KHz	
	Ratio of Freq. Deviation	0.8				
7.	Receive Sensitivity @< 0.1% BER( Bit error rate	)-83			dBm	

www.wavesen.com Phone: 020-84083341 Fax: 020-84332079 QQ:1043073574

Address: Room 527, No.13, Jiangong Road, Tianhe software park, Tianhe district, Guangzhou Post: 510660 Technology consultant: <a href="mailto:support@wavesen.com">support@wavesen.com</a>
Business consultant: <a href="mailto:support@wavesen.com">support@wavesen.com</a>

Complaint and suggestion: sunbirdit@hotmail.com

## 8. Test diagram


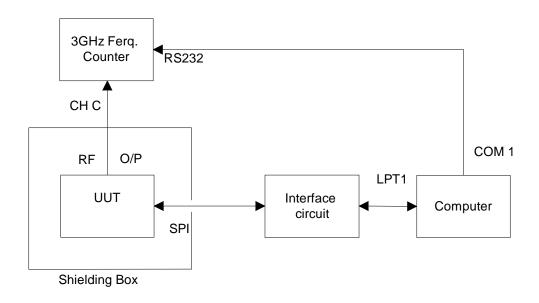


Fig 1. Programming and Freq. Alignment

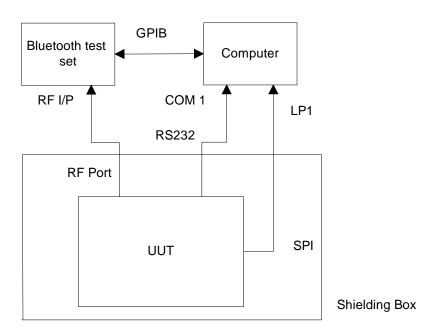

### Fig 2 RF parameter Test Procedure

www.wavesen.com Phone: 020-84083341 Fax: 020-84332079 QQ:1043073574

Address: Room 527, No.13, Jiangong Road, Tianhe software park, Tianhe district, Guangzhou Post: 510660 Technology consultant: <a href="mailto:support@wavesen.com">support@wavesen.com</a>
Business consultant: <a href="mailto:support@wavesen.com">support@wavesen.com</a>

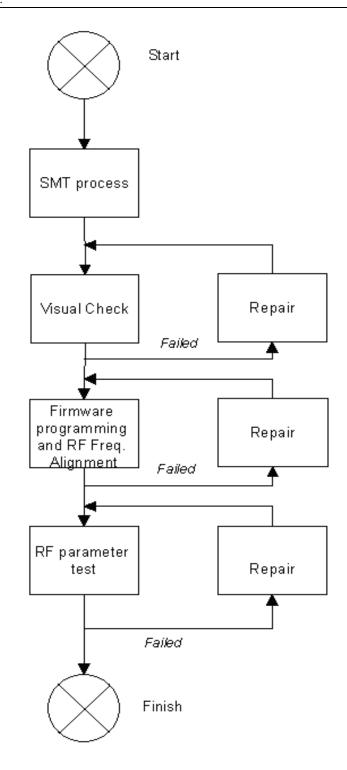


Fig 3 Assemble/Alignment/Testing Flow Chart

www.wavesen.com Phone: 020-84083341 Fax: 020-84332079 QQ:1043073574

Address: Room 527, No.13, Jiangong Road, Tianhe software park, Tianhe district, Guangzhou Post: 510660 Technology consultant: <a href="mailto:support@wavesen.com">support@wavesen.com</a>
Business consultant: <a href="mailto:support@wavesen.com">support@wavesen.com</a>

#### 9. AT command set

The way to the AT command mode: supply power to the module, it will enter to the AT mode if it needn't pair. The interval of command is about 1 second.

Default parameter: Baud rate:9600N81, ID: linvor, Password:1234

1. Test communication

Send: AT (please send it every second)

Back: OK

#### 2. Reset the Bluetooth serial baud rate

Send: AT+BAUD1 Back: OK1200

Send: AT+BAUD2

Back: OK2400

• • • • • •

1-----1200

2-----2400

3-----4800

4-----9600 (Default)

5----19200

6-----38400

7-----57600

8-----115200

9-----230400

A-----460800

B-----921600

C----1382400

PC can't support the baud rate lager than 115200. The solution is: make the MCU have higher baud rate (lager than 115200) through programming, and reset the baud rate to low level through the AT command.

The baud rate reset by the AT command can be kept for the next time even though the power is cut off.

#### 3. Reset the Bluetooth name

Send: AT+NAMEname

Back: OKname

<u>www.wavesen.com</u> Phone: 020-84083341 Fax: 020-84332079 QQ:1043073574

Address: Room 527, No.13, Jiangong Road, Tianhe software park, Tianhe district, Guangzhou Post: 510660

Technology consultant: <a href="mailto:support@wavesen.com">support@wavesen.com</a>
Business consultant: <a href="mailto:support@wavesen.com">support@wavesen.com</a>

Parameter name: Name needed to be set (20 characters limited)

Example:

Send: AT+NAMEbill\_gates

Back: OKname

Now, the Bluetooth name is reset to be "bill\_gates"

The parameter can be kept even though the power is cut off. User can see the new Bluetooth name in PDA refresh service. (Note: The name is limited in 20 characters.)

4. change the Bluetooth pair password

Send: AT+PINxxxx Back:OKsetpin

Parameter xxxx: The pair password needed to be set, is a 4-bits number. This command can be used in the master and slave module. At some occasions, the master module may be asked to enter the password when the master module tries to connect the slave module (adapter or cell-phone). Only if the password is entered, the successful connection can be built. At the other occasions, the pair can be finish automatically if the master module can search the proper slave module and the password is correct. Besides the paired slave module, the master can connect the other devices who have slave module, such as Bluetooth digital camera, Bluetooth GPS, Bluetooth serial printer etc.

Example:

Send: AT+PIN8888

Back: OKsetpin

Then the password is changed to be 8888, while the default is 1234.

This parameter can be kept even though the power is cut off.

5. No parity check (The version, higher than V1.5, can use this command)

Send: AT+PN (This is the default value)

Back: OK NONE

6. Set odd parity check (The version, higher than V1.5, can use this command)

Send: AT+PO Back: OK ODD

7. Set even parity check (The version, higher than V1.5, can use this command)

Send: AT+PE Back: OK EVEN

www.wavesen.com Phone: 020-84083341 Fax: 020-84332079 QQ:1043073574

Address: Room 527, No.13, Jiangong Road, Tianhe software park, Tianhe district, Guangzhou Post: 510660

Technology consultant: <a href="mailto:support@wavesen.com">support@wavesen.com</a>
Business consultant: <a href="mailto:sales@wavesen.com">sales@wavesen.com</a>

8. Get the AT version Send: AT+VERSION Back: LinvorV1.n

www.wavesen.com Phone: 020-84083341 Fax: 020-84332079 QQ:1043073574

Address: Room 527, No.13, Jiangong Road, Tianhe software park, Tianhe district, Guangzhou F Technology consultant: <a href="mailto:support@wavesen.com">support@wavesen.com</a>
Business consultant: <a href="mailto:support@wavesen.com">support@wavesen.com</a> Post: 510660

Attention: Limited Modular Approval - this RF Module may not be sold to the generic public and requires professional installation. Due to the fact that this RF Module is not equipped with an own shielding, the end - product incl. this RF Module has to show compliance to the FCC rules (15B/radiated emissions).

(OEM)Integrator has to assure compliance of the entire end - product incl. the integrated RF Module. Additional measurements (15B) and/ or equipment authorizations (e.g Verification) may need to be addressed depending on co - location or simultaneous transmission issues if applicable.

Integrator is reminded to assure that these installation instructions will not be made available to the end - user of the final host device.

The BT Module must be always marketed as it is mounted on this PCB and itself may not be integrated into any other application without C2P

With the low output power, this RF Module meets the FCC SAR exemption.

The final host device, into which this RF Module is integrated "has to be labeled with an auxiliary lable stating the FCC ID of the RF Module, such as" Contains FCC ID:2ABCHWB-8606D

The RF Module is powered by DC, the antenna is PCB antenna and the antenna gain is 0 dBi.

This device complies with part15 of the FCC rules. Operation is subject to the following two conditions:

- (1) this device may not cause harmful interference, and
- (2)this device must accept any interference received, including interference that may cause undesired operation. "should be placed also on the device or alternatively within a prominent location of the users manual

Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This module is intended for OEM integrator. The OEM integrator is still responsible for the FCC compliance requirement of the end product, which integrates this module. Due to missing shielding the module is strictly limited to integration by the Grantee himself or his dedicated OEM Integrator.

The integration is strictly limited into following host platform(s) that are electrically identical incl.

variations that are defined as Class I Permissive Change to the documented and certified samples

-Bluetooth Speakers

Additional hosts and/or platforms can be added via Class II Permissive Change by the Grantee.

under the control of the Grantee.