Title: **My Progress** Type: **Block**

Moodle version required: 2.0

Git Repository: https://github.com/fernandooliveira/moodlefn-myprogress

Support and Feedback: www.moodlefn.knet.ca


Note: The *My Progress* block was originally created to work with the *Assignment Tracking System (ATS)*. As such, it uses the ATS "status icons". Both these plug-ins are part of the MoodleFN plug-in series for Moodle 2.x, which can be found on www.moodlefn.knet.ca. Note however that the ATS is not a required component of the My Progress block.

Contents of this document:

- A. Installation Instructions
- B. Overview of My Progress Block


A. Installation Instructions:

- Click on the following link to download the files for this plug-in: https://github.com/fernandooliveira/moodlefn-myprogress zipball/master/
- 2. Unzip the downloaded file and rename top directory to fn_myprogress
- 3. Copy the fn_myprogress directory to yourmoodlesite/blocks/

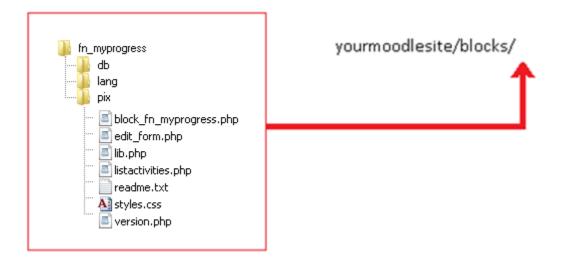


B. Overview of My Progress Block

The Progress Report block provides STUDENTS with an overview of their progress in regards to activities in a given course. This block is not shown to teachers. Each line also acts as a link which provides students with a list of the relevant activities (example: when a student clicks on *X Incomplete* activities, his/her incomplete activates will get listed).



Note 1: This block relies on the Activity Completion feature that was released as part of Moodle 2.0 (more information about this feature can be found at http://docs.moodle.org/20/en/Activity_completion). Activities that do not have the "completion tracking" turned on will not be included in this block.

Note 2: If an activity has a "Require Grade" condition in the Activity Completion setting, then that activity will show as "complete" when it receives **any** grade.

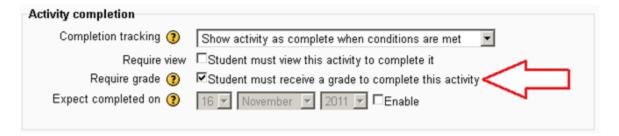

However, if the same activity also has the "grade to pass" option enabled in the gradebook, the activity will show as "Incomplete" until it receives a grade that is equal or greater than the "grade to pass" value.

