

Concreto confinado - Mander 1988 monotónico

Project ID: Modelos_constitutivos

Case ID: COL75X75FC28MPa

Material: confined_concrete

Behavior: monotonic

Model ID: Mon_Mander1988

Source JSON: C:\Users\LENOVO\Documents\Proyectos python\StructureLab_PBD_RC\configs\stage_02\confined_concrete\monotonic\Mon_Mander1988.json

Response metrics

Point count: 801

Strain range: -0.00013188580619219944 to 0.025669879898120283

Stress range [MPa]: -3.2800000000000002 to 41.83544034212139

Reversals: 0

Failed points: 0

Calculated parameters

rho_cc: 0.014367001554275612

rho_s: 0.015417845096531194

rho_x: 0.007708922548265597

rho_y: 0.007708922548265597

k_e: 0.7369155680322457

f_lx_mpa: 2.3859465162001263

f_ly_mpa: 2.3859465162001263

f_l_mpa: 2.3859465162001263

elastic_modulus_mpa: 24870.0

f_t_mpa: 3.28

epsilon_t: 0.00013188580619219944

f_cc_mpa: 41.83545529270206

epsilon_cc: 0.006941234033107877

secant_modulus_mpa: 6027.0918821001915

r: 1.3198599624001115

epsilon_cu: 0.025669879898120283


f_cu_mpa: 34.383667166555256

Warnings

None.

Concreto confinado - Mander 1988 monotónico

Monotónico | Concreto confinado | Mon_Mander1988 | Puntos notables

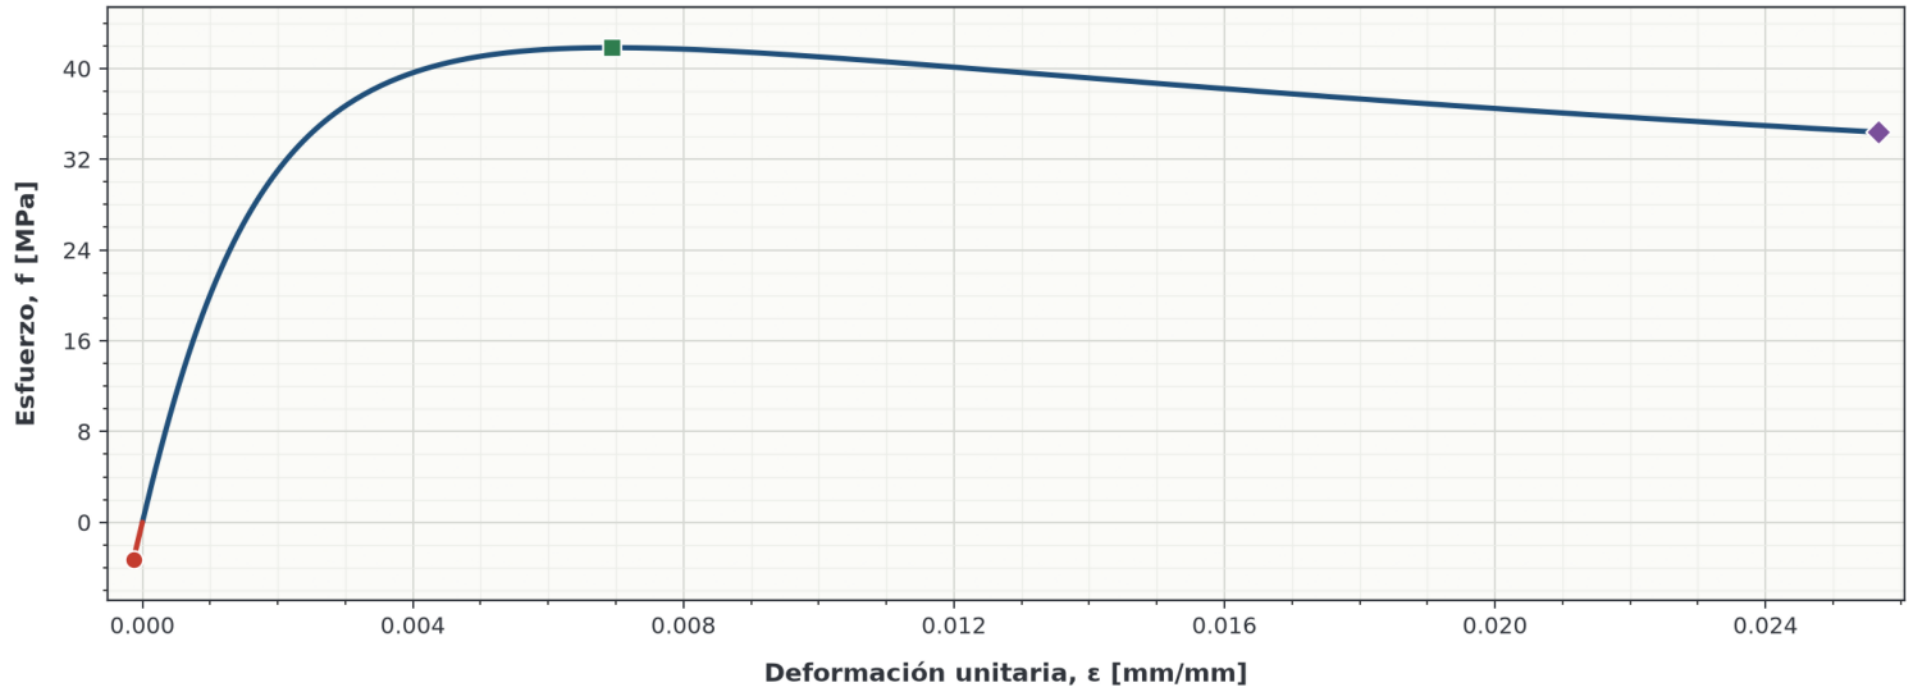

Curva y puntos notables

- Mander 1988 | Concreto Confinado | Compresión
- Mander 1988 | Concreto Confinado | Tracción
- Resistencia última a tracción ($-f_t = -3.280$ [MPa], $-\epsilon_t = -0.000132$ [mm/mm])
- Resistencia máxima confinada ($f'_{cc} = 41.835$ [MPa], $\epsilon_{cc} = 0.006941$ [mm/mm])
- ◆ Deformación última confinada ($f_{cu} = 34.384$ [MPa], $\epsilon_{cu} = 0.025670$ [mm/mm])