


Q7, Q8 : Erno Borbely cascode
 Q9, U2 : Wilson current mirror (CCS)
 R23, R17, CA2 : DC servo
 Measure across R3 for current mirror.
 Measure across R13 for class A stage BIAS.
 DC Offset at output < 1mV
 DC Offset at output with R32 = 10R < 40mV

If you use a potentiometer in front of the amp, do not wire the LFE (not wire C20 and replace R33 by 100R).

Do not power on the board without opamp.

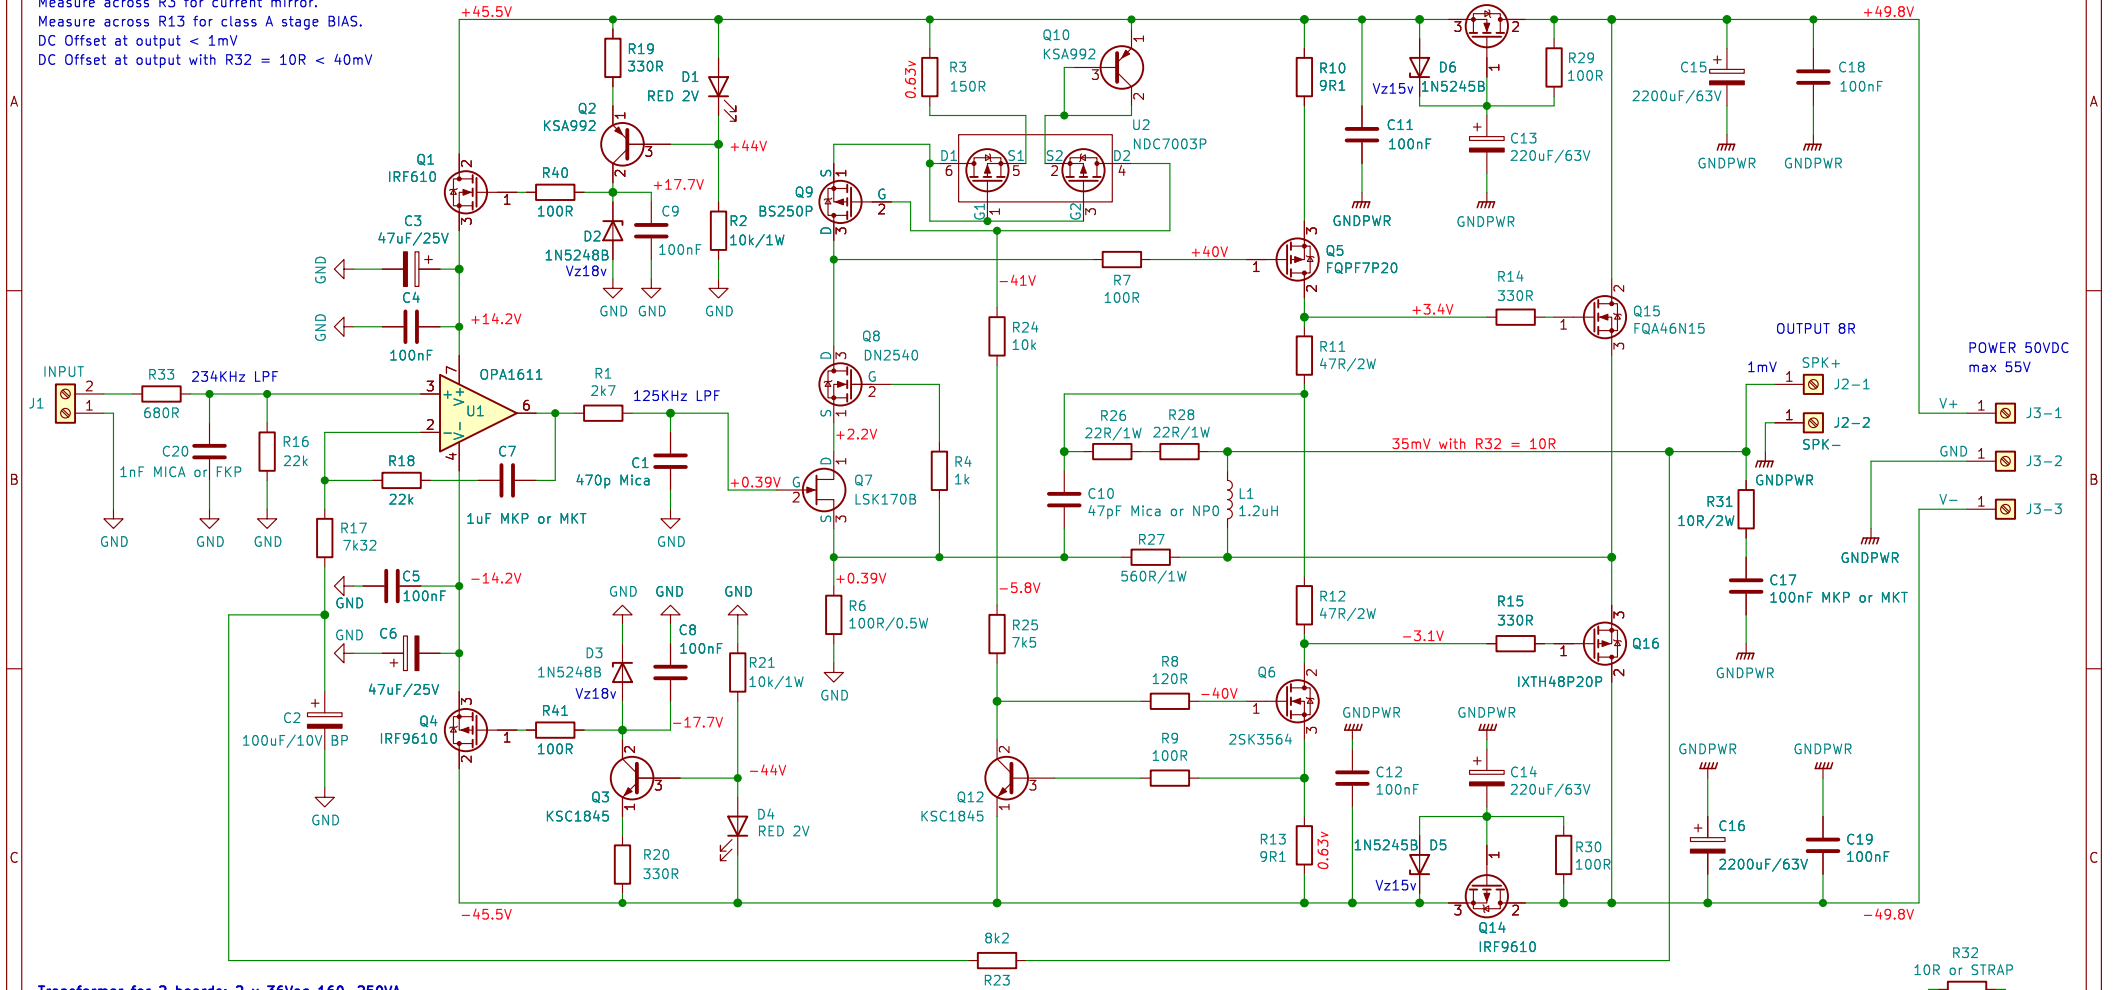

Transformer for 2 boards: 2 x 36Vac 160–250VA

L1 : 19.5 turns of a 1mm diameter copper insulated wire wound around a 8mm tube.
 This will give you a coil of 10x20mm (see picture on github repository).

U1 : OPA1611 (BIPOLAR) or OPA828 (JFET)
 U2 : NDC7003P or PJS6839
 Q1, Q13 : IRF610
 Q2, Q10 : KSA992
 Q3, Q12 : KSC1845
 Q4, Q14 : IRF9610
 Q5 : FQP3P20, FQPF7P20 or IRF9610 (isolator)
 Q6 : FQP3N30, 2SK3564 or IRF610 (isolator)
 Q7 : LSK170B (TH) or JFE150 (SMD SOT23–5)
 Q8 : DN2540 or DN2535
 Q9, Q11 : BS250P or ZVP2106A
 Q15 : FQA46N15, IXFH50N85X or IRFP240 (isolator)
 Q16 : FQA36P15, IXTH48P20P or IRFP9240 (isolator)

100nF capacitor : Wima MKS2
 1W resistor : Vishay PR01
 2W resistor : Vishay CCF02 or PR02
 D1, D4 : LED RED 2V TLHR5400
 D2, D3 : 1N5248B
 D5, D6 : 1N5245
 C3, C6 : Nichicon UKZ1E470MPM
 C13, C14 : Vishay MAL215058221E3
 J1 : KF127 or JST B2B–XH–A–GU
 J2 and J3 : FASTON 250 PCB connector (TE Connectivity 63849–1)

For input sensibility at 1.5v: R17 = 7.32k
 For input sensibility at 0.750v: R17 = 3.3k
 The value of R25 depends on the input voltage (42v = 2K7, 50v = 7K5, 60v = 8K2).
 Remember to take off the resistors of 1W and more from the PCB when you solder them.

Q17 a QUAD405 audiophile approach

Modified by Stef for the Q17–Mini project
 by eng. Tiberiu Vicol

Sheet: /
 File: Q17–Mini.kicad_sch

Title: Q17–Mini Amplifier 2.x

Size: A4 Date: 2024–01–06

KiCad E.D.A. kicad 7.0.8

Rev: 2.0.3

Id: 1/1