


Q7, Q8 : cascode circuit (R3 = current setup, need to adjust R5/R6)  
 Q9, Q11 : current mirror circuit  
 R23, R17, C2 : DC servo  
 Q12 : temperature compensation

Measure across R3 for mirror ccs current.  
 Measure across R13 for class A stage bias.

Do not power on the board without opamp.

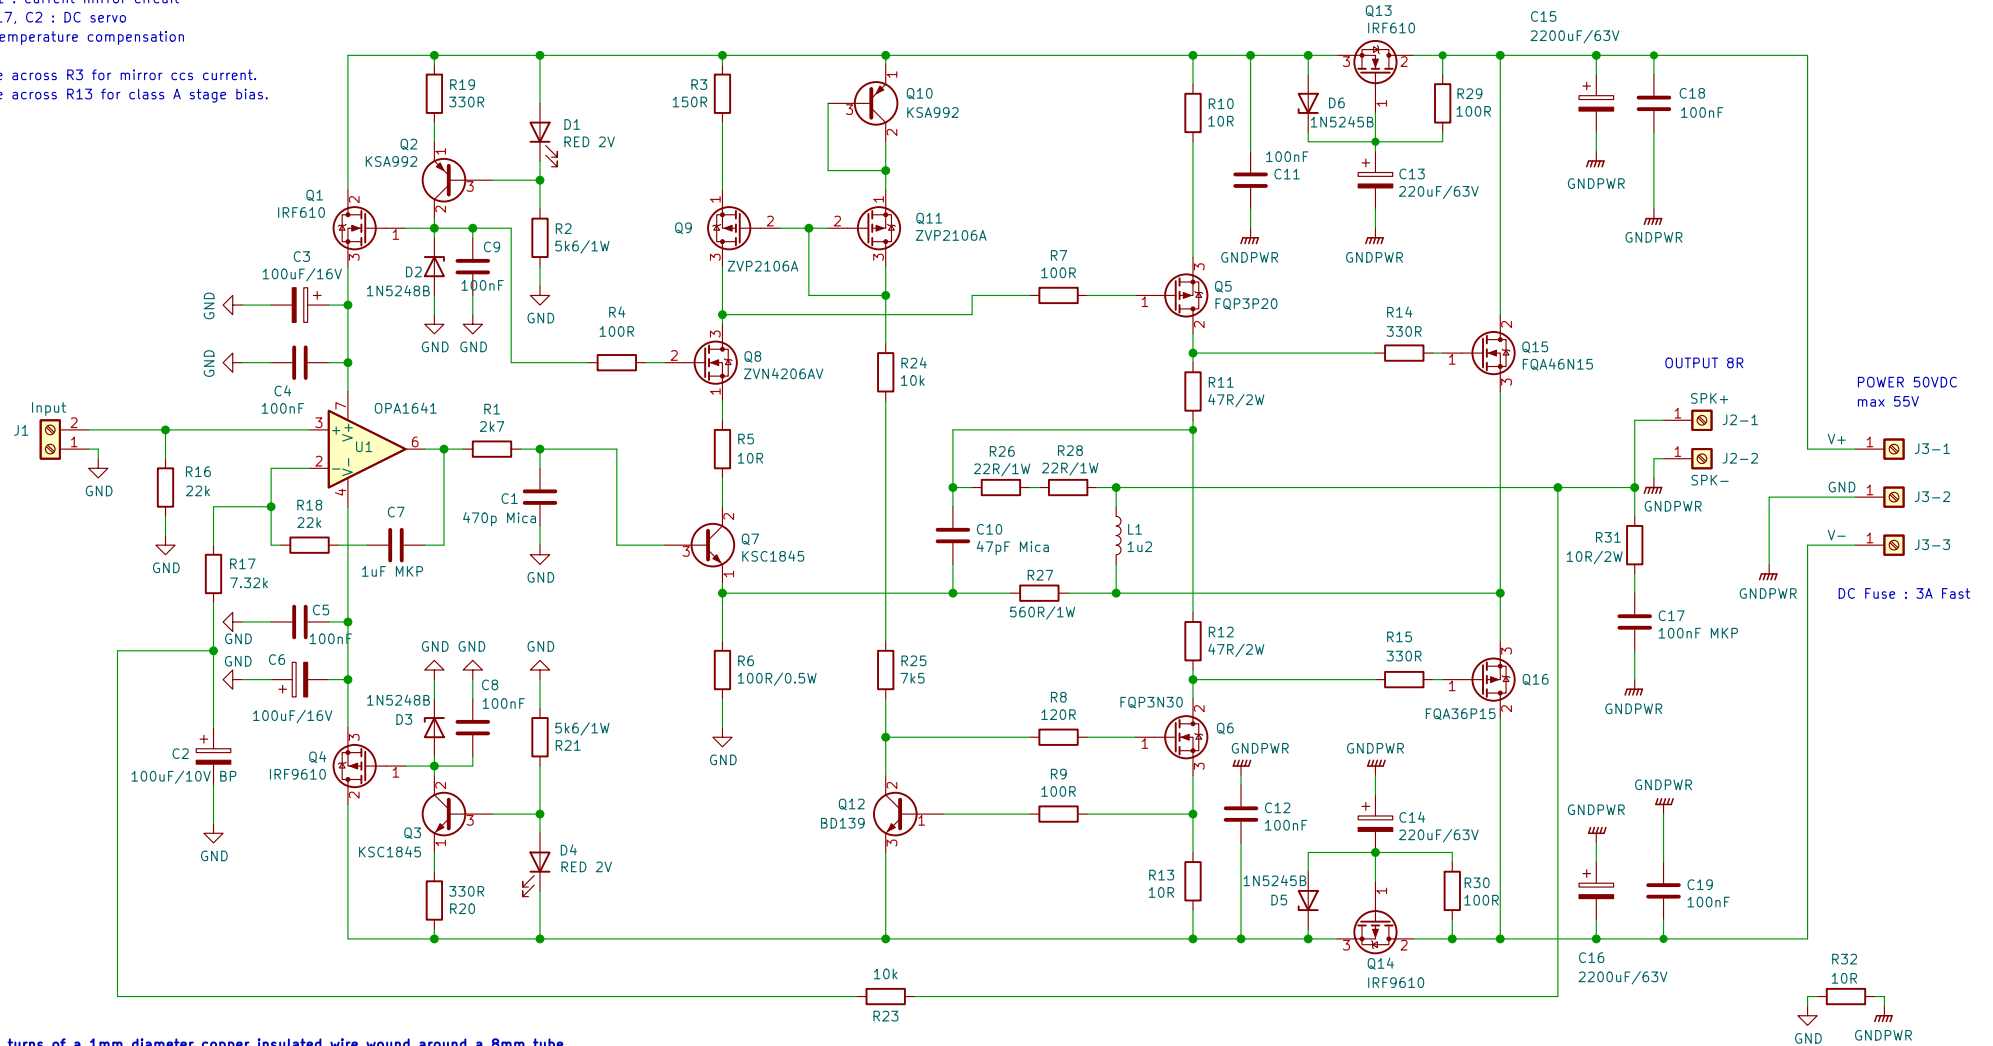

L1 : 22 turns of a 1mm diameter copper insulated wire wound around a 8mm tube.

This will give you a coil of 10x20mm (see picture on github repository).

U1 : OPA1641 or OPA1611

Q1, Q13 : IRF610

Q2, Q10 : KSA992

Q4, Q14 : IRF9610

Q3, Q7 : KSC1845 or 2SC2240

Q5 : FQP3P20

Q6 : FQP3N30

Q8 : ZVN4206AV or 2N7000 (not TA)

Q12 : BD139

Q9, Q11 : ZVP2106A or BS250P (Diodes Inc)

Q15 : FQA46N15

Q16 : FQA36P15

100nF capacitor : Wima MKS2

C3, C5 : ELna Silmic II 100uF 16V

1W resistor : Vishay PR01

2W resistor : Vishay CCF02 or PR02

C13, C14 : Panasonic FC

D1, D4 : LED RED 2V

D2, D3 : 1N5248B

D5, D6 : 1N5245

0.25W, 0.5W resistor : Vishay MRS25 or CCF07

R26, R27, R28 : try to use non inductive 1W resistor (Vishay Dale or Ohmite).

C15, C16 : Vishay 048 RML (MAL204858222E3) or Nichicon UFW (UFW1J222MHD).

C7 : use MKP capacitor (MKP1F041005100JYSD) or MKP4D041005D00JYSD).

C17 : use MKP capacitor (MKP1F031004B00KI00 or FKP3C031004C00JYSD).

C2 : use bipolar capacitor (Nichicon Muse UES1A101MPM).

C1, C10 : use Mica CDE CD15 or Polystyrene capacitor.

J2 and J3: FASTON 250 PCB connector (TE Connectivity 63849-1)

For input sensibility at 1.5v: R17 = 7K32

For input sensibility at 0.750v: R17 = 3K3

Exicon ECW laterals:

R11,R12 = 10R 2W, R14 = 510R and R15 = 390R

Q17 a QUAD405 audiophile approach

Modified by Stef for the Q17-Mini project

by eng. Tiberiu Vicol

Sheet: /

File: Q17-Mini.kicad\_sch

**Title: Q17-Mini Amplifier**

Size: A4 Date: 2022-01-11

KiCad E.D.A. kicad (6.0.0-0)

Rev: 1.2.5

Id: 1/1