


Q7, Q8 : cascode circuit  
 Q9, Q11 : current mirror circuit  
 R23, R17, C2 : DC servo  
 Q12 : temperature compensation

Do not power on the board without opamp.

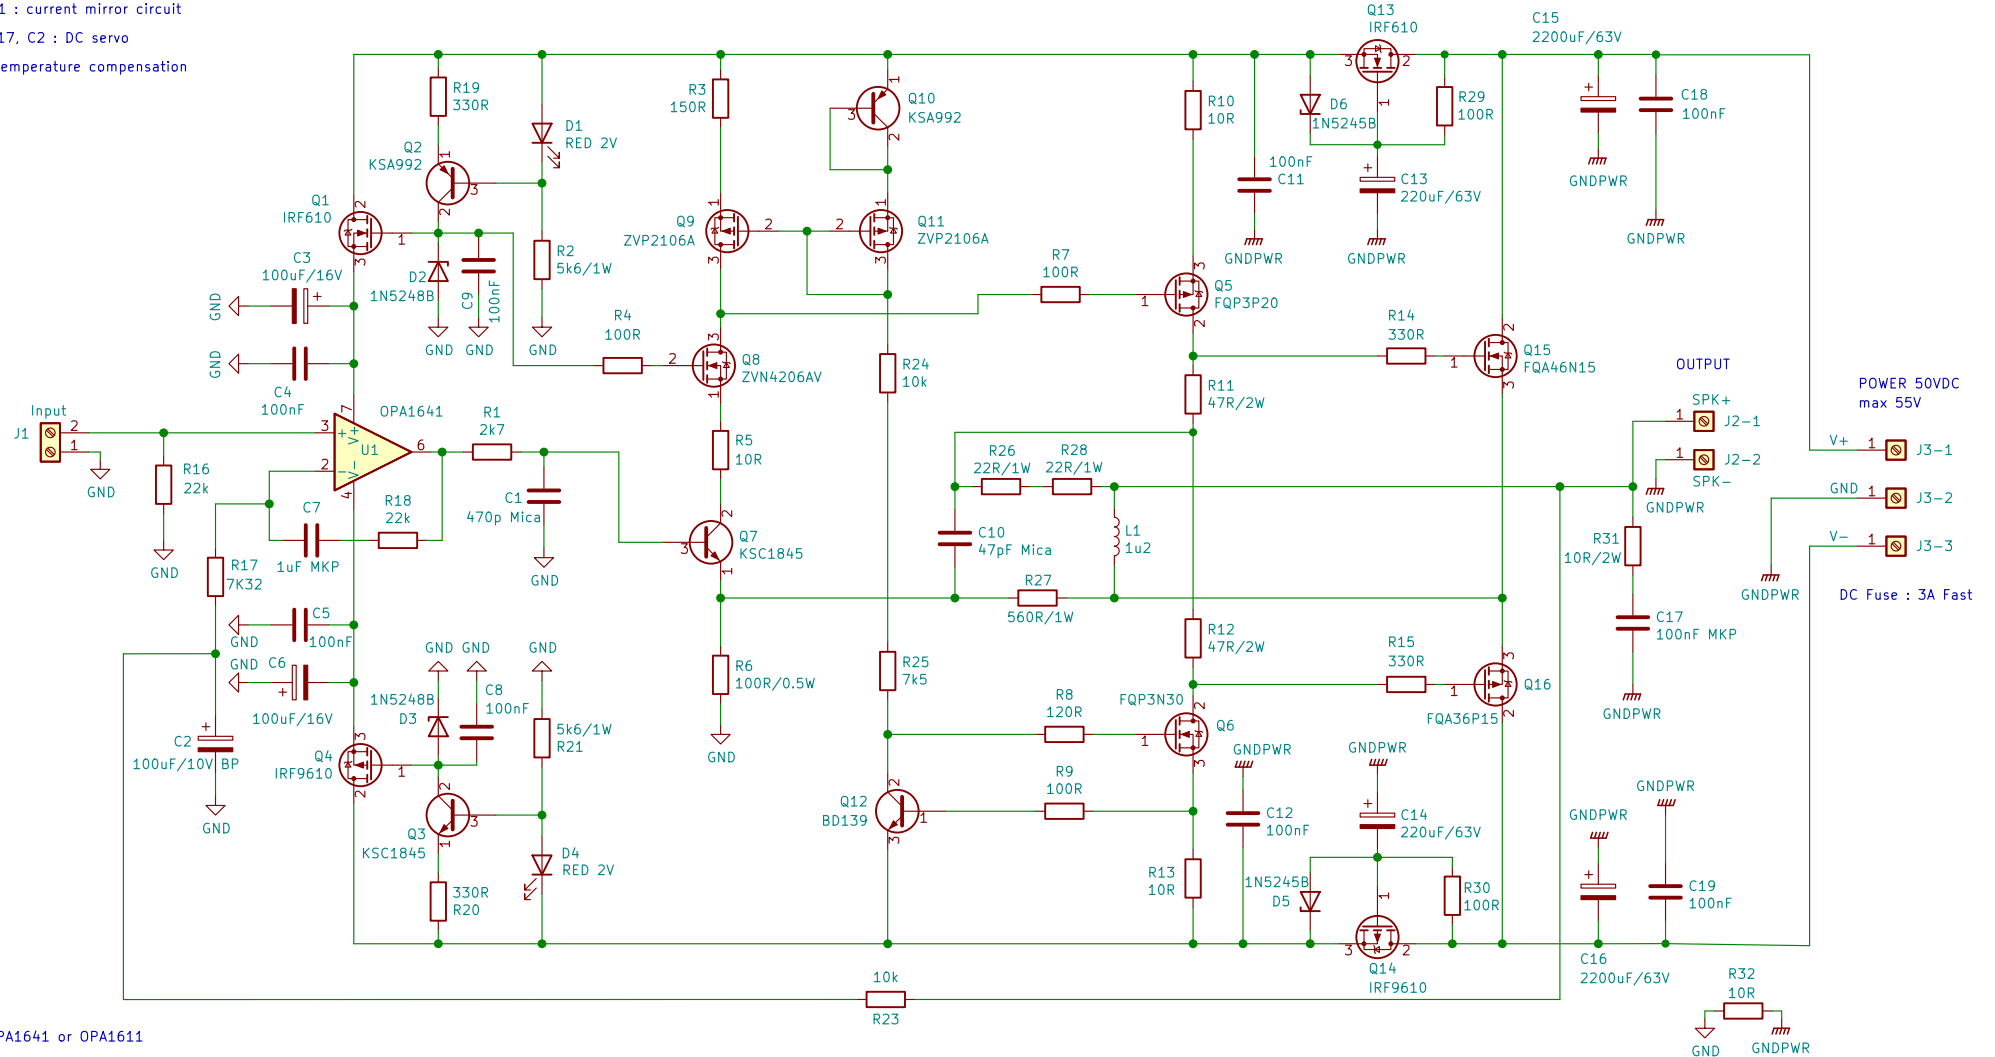

U1 : OPA1641 or OPA1611

Q1, Q13 : IRF610

Q2, Q10 : KSA992

Q4, Q14 : IRF9610

Q3, Q7 : KSC1845

Q5 : FQP3P20

Q6 : FQP3N30

Q8 : ZVN4206AV or 2N7000 (not TA)

Q12 : BD139

Q9, Q11 : ZVP2106A or BS250P (Diodes Inc)

Q15 : FQA46N15

Q16 : FQA36P15

L1 : 18.5 turns of a 1mm diameter copper insulated wire wound around a 8mm tube.

This will give you a coil of 10.85x19.67mm (see picture on github repository).

100nF capacitor : Wima MKS2

C3, C5 : ELna Silmic II 100uF 16V

1W resistor : Vishay PR01

2W resistor : Vishay CCF02 or PR02

C13, C14 : Panasonic FC

D1, D4 : LED RED 2V

D2, D3 : 1N5248B

D5, D6 : 1N5245

0.25W, 0.5W resistor : Vishay CCF07 or MRS25

R26, R27, R28 : try to use non inductive 1W resistor (Vishay Dale or Ohmite).

C15, C16 : Vishay 048 RML (MAL204858222E3) or Nichicon UFW (UFW1J222MHD).

C7 : use MKP capacitor (MKP1F041005I00JYSD or MKP4D041005D00JSSD).

C17 : use MKP capacitor (MKP1F031004B00KI00 or FKP3C031004C00JSSD).

C2 : use bipolar capacitor (Nichicon Muse UES1A101MPM).

C1, C10 : use Mica CDE CD15 or Polystyrene capacitor.

J2 and J3: FASTON 250 PCB connector (TE Connectivity 63849-1)

For input sensibility at 1.5v R17 = 7K32

Exicon laterals : R11 and R12 = 10R 2W

For 0.750v input sensibility R17 = 3K3.

Q17 a QUAD405 audiophile approach

Modified by Stef for the Q17-Mini project

by eng. Tiberiu Vicol

Sheet: /

File: Q17-Mini.kicad\_sch

**Title: Q17-Mini Amplifier**

Size: A4 Date: 2021-12-29

KiCad E.D.A. eeschema (6.99.0)

**Rev: 1.2.1**

Id: 1/1