


規制番号 名称	10432 広島大橋北詰	運 用	H.19年10月25日	製造番号	7H0718
管制番号 名称	10432 広島大橋北詰 (U集中)	開始日時	22時13分 ~	製造年月	平成 9年10月
				メーカー	松下電器産業㈱

Int144

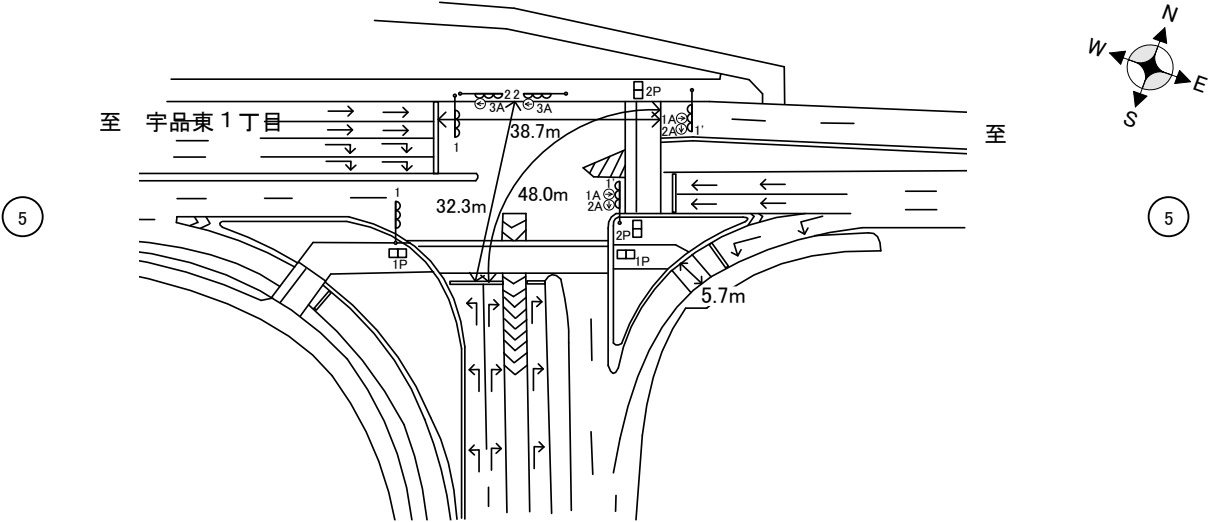

ステータス機能
S3:閃光

設計
30

ステップ番号	1	2	3	4	5*	6	7	8	9	10*	11	12	13*	14	15	16	17	18	19	20
ステップ名称	1PG	1PW	1 G	1 Y	1 R	2PG	2PW	2 A	2 Y	2 R	3 A	3 Y	3 R							
流動図	1' 直矢 ← 1 1P <-----> 歩灯2 32. 4m					1' 右矢 2左矢 歩灯2 21. 5m 2P					3右矢									
1P [1P]																				
1 [1V]																				
1' [3V]																				
1'直矢 [1A]																				
1'右矢 [2A]																				
2P [2P]																				
3 [2V]																				
2左矢 [3A]																				
2 [3P]																				
3右矢 [4A]																				
PU	109					109		109			109									
PL (108秒)	33	11	2	3	3	22	7	2	2	3	15	2	3	06:00~20:00						
PL (103秒)	33	11	2	3	3	22	7	2	2	3	10	2	3	20:00~06:00						
定周期 (160秒)	40	11	2	3	3	48	7	6	2	3	30	2	3							
保安秒時(160秒)	50	11	2	3	3	52	7	2	2	3	20	2	3							
最長時間(秒)	110	110	110	10	10	110	110	110	10	10	110	10	10							
最短時間(秒)	6	0.95	0.95	0.95	0.95	6	0.95	0.95	0.95	0.95	6	0.95	0.95							
AB運動出力	A	B	B	B	B	B	A	A	A	A	A	A	A							

Int144

The diagram shows a complex traffic intersection. A compass rose in the top right corner indicates North (N), South (S), East (E), and West (W). The intersection features several lanes with arrows indicating traffic flow. Key dimensions are labeled: 38.7m, 48.0m, 32.3m, and 5.7m. A circled number '5' is located on the left side of the diagram.

設計
30

ステータス機能
S3:閃光

※夜間のみPL>2/3Lで設計

ステップ番号	1*	2	3	4	5	6*	7	8	9*	10	11	12	13	14*	15	16	17	18	19	20
ステップ名称	1PG	1PG	1PW	1 G	1 Y	1 R	1 A	1 Y	1 R	2PG	2PW	2 G	2 Y	2 R						
流動図																				
1P [1P]																				
1 [1V]																				
1' [3V]																				
1'直矢 [1A]																				
1'右矢 [2A]																				
2P [2P]																				
2 [2V]																				
2左矢 [3A]																				
PU	109	109					109			109										
PL (99秒)	10	23	11	2	3	3	5	2	3	22	7	2	3	3						
保安秒時(160秒)	24	29	11	2	3	3	38	2	3	30	7	2	3	3						
最長時間(秒)	110	110	110	110	10	10	110	10	10	110	110	110	10	10						
最短時間(秒)	6	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95	6	0.95	0.95	0.95	0.95						
AB運動出力	A	A	B	B	B	B	B	B	B	B	A	A	A	A						