


Display 7 segmentos

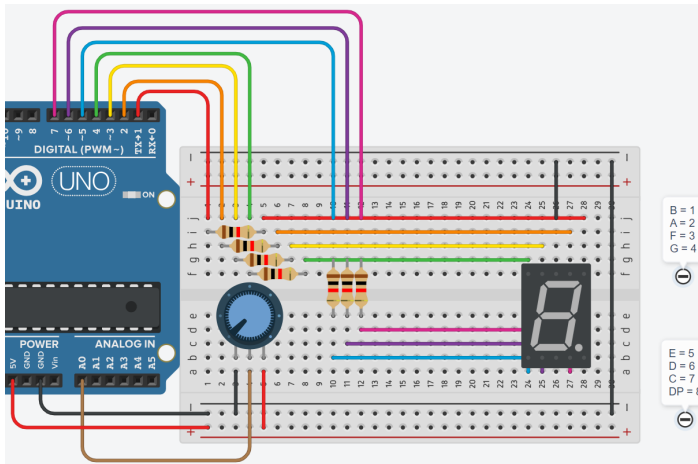

Código Arduino

```
// C++ code
// la declaración como
// constante nos ayuda a ahorrar
// memoria
// podemos usar esta forma de
// declaración
#define PTM A0
// también podemos usar esta
// otra forma
const int B = 1, A = 2, F = 3,
G = 4, E = 5, D = 6, C = 7;
int i = 0, lectura = 0, opt =
0;
void setup()
{
    // inicializamos todos los
    // pines usando un for
    for (i = 1; i < 8; i++){
        pinMode(i, OUTPUT);
    }
}

void loop()
{
    digitalWrite(A, LOW);
    digitalWrite(B, LOW);
    digitalWrite(C, LOW);
    digitalWrite(D, LOW);
    digitalWrite(E, LOW);
    digitalWrite(F, LOW);
    digitalWrite(G, LOW);

    lectura = analogRead(PTM);
    opt = map(lectura, 0, 1023,
0, 7);

    switch(opt){
        case 1:
            digitalWrite(A, LOW);
            digitalWrite(B, HIGH);
            digitalWrite(C, HIGH);
            digitalWrite(D, LOW);
            digitalWrite(E, LOW);
            digitalWrite(F, LOW);
            digitalWrite(G, LOW);
```

```

break;
case 2:
    digitalWrite(A, HIGH);
    digitalWrite(B, HIGH);
    digitalWrite(C, LOW);
    digitalWrite(D, HIGH);
    digitalWrite(E, HIGH);
    digitalWrite(F, LOW);
    digitalWrite(G, HIGH);
break;
case 3:
    digitalWrite(A, HIGH);
    digitalWrite(B, HIGH);
    digitalWrite(C, HIGH);
    digitalWrite(D, HIGH);
    digitalWrite(E, LOW);
    digitalWrite(F, LOW);
    digitalWrite(G, HIGH);
break;
case 4:
    digitalWrite(A, LOW);
    digitalWrite(B, HIGH);
    digitalWrite(C, HIGH);
    digitalWrite(D, LOW);
    digitalWrite(E, LOW);
    digitalWrite(F, HIGH);
    digitalWrite(G, HIGH);
break;
case 5:
    digitalWrite(A, HIGH);
    digitalWrite(B, LOW);
    digitalWrite(C, HIGH);
    digitalWrite(D, HIGH);
    digitalWrite(E, LOW);
    digitalWrite(F, HIGH);
    digitalWrite(G, HIGH);
break;
case 6:
    digitalWrite(A, LOW);
    digitalWrite(B, LOW);
    digitalWrite(C, HIGH);
    digitalWrite(D, HIGH);
    digitalWrite(E, HIGH);
    digitalWrite(F, HIGH);
    digitalWrite(G, HIGH);
break;
case 7:
    digitalWrite(A, HIGH);
    digitalWrite(B, HIGH);
    digitalWrite(C, HIGH);
    digitalWrite(D, LOW);
    digitalWrite(E, LOW);
    digitalWrite(F, LOW);

```

```
        digitalWrite(G, LOW);  
    break;  
    default:  
        digitalWrite(A, HIGH);  
        digitalWrite(B, HIGH);  
        digitalWrite(C, HIGH);  
        digitalWrite(D, HIGH);  
        digitalWrite(E, HIGH);  
        digitalWrite(F, HIGH);  
        digitalWrite(G, LOW);  
    break;  
}  
}
```

[enlace en línea](#)