


Display 7 segmentos - MATRICES

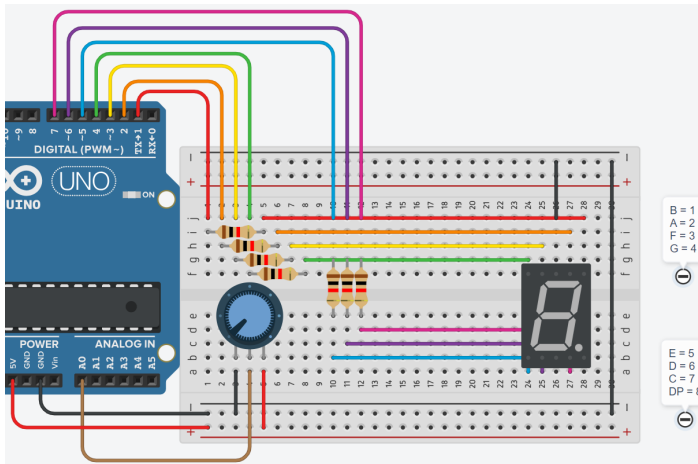

Código Arduino

```
// C++ code
// constante de lectura de
// potenciómetro
#define PTM A0

int i = 0, lectura = 0, num = 0;

int numeros [8][7] =
{
  {HIGH, HIGH, HIGH, LOW, HIGH,
  HIGH, HIGH}, //0
  {HIGH, LOW, LOW, LOW, LOW,
  LOW, HIGH}, //1
  {HIGH, HIGH, LOW, HIGH, HIGH,
  HIGH, LOW}, //2
  {HIGH, HIGH, LOW, HIGH, LOW,
  HIGH, HIGH}, //3
  {HIGH, LOW, HIGH, HIGH, LOW,
  LOW, HIGH}, //4
  {LOW, HIGH, HIGH, HIGH, LOW,
  HIGH, HIGH}, //5
  {LOW, LOW, HIGH, HIGH, HIGH,
  HIGH, HIGH}, //6
  {HIGH, HIGH, LOW, LOW, LOW,
  LOW, HIGH} // 7
};

void setup()
{
  //inicializamos todos los
  //puertos usando un for
  for (i = 0; i < 7; i++){
    pinMode(i, OUTPUT);
  }
}

void loop()
{
  lectura = analogRead(PTM);
  num = map(lectura, 0, 1023,
  0, 7);
```

```
for (i = 0; i < 7; i++){  
    digitalWrite(i,  
    numeros[num][i]);  
}  
  
}
```

[enlace en línea](#)