


Multipurpose Camera Unit Connector for Inputs and Outputs

Multipurpose Camera Unit 20P Connector (female terminals)

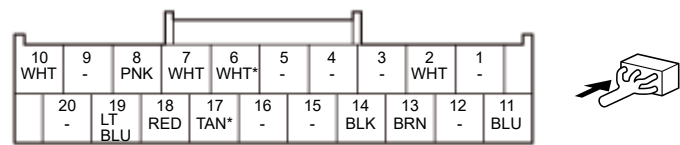

*: With auto high-beam

Terminal number	Terminal name	Description
1	Not used	Not used
2	F-CAN A_H	F-CAN communication (high) circuit
3	Not used	Not used
4	Not used	Not used
5	Not used	Not used
6	B-CAN_H*	B-CAN communication (high) circuit
7	RADAR CANH	RADAR CAN communication (high) circuit
8	LDW SW	Detects RDM switch signal
9	Not used	Not used
10	+B BACKUP	Power supply for backup memory
11	LDW IND	Drive RDM switch circuit
12	Not used	Not used
13	F-CAN A_L	F-CAN communication (low) circuit
14	GND	Ground circuit for the multipurpose camera unit
15	Not used	Not used
16	Not used	Not used
17	B-CAN_L*	B-CAN communication (low) circuit
18	RADAR CANL	RADAR CAN communication (low) circuit
19	IG1 ACM(DC/DC)	Power source for the multipurpose camera unit
20	Not used	Not used

*: With auto high-beam