



University of British Columbia  
Electrical and Computer Engineering  
ELEC291/ELEC292

## Lab 6: New Microcontroller Setup.

Dr. Jesús Calviño-Fraga P.Eng.  
Department of Electrical and Computer Engineering, UBC  
Office: KAIS 3024  
E-mail: [jesusc@ece.ubc.ca](mailto:jesusc@ece.ubc.ca)  
Phone: (604)-827-5387

March 10, 2023

Lab #6

Copyright © 2012-2023, Jesus Calvino-Fraga. Not to be copied, used, or revised without explicit written permission from the copyright owner.

1

## Requirements & Comments

- Lab #6 requirements are the same as Lab #4 (for ELEC291 students) but microcontroller system must not be 8051!
- Programmed in C.
- Work with a partner.
- Good start for Project #2

Lab #6

Copyright © 2012-2023, Jesus Calvino-Fraga. Not to be copied, used, or revised without explicit written permission from the copyright owner.

2

## Getting the Parts for Lab #6 and Project #2

- Buy the kit (one per team, CAD 80\$) by visiting:
  - <https://eng-services.ece.ubc.ca/course-support/2022-winter-term-2/elec291/>
  - Password: ee291-3\_2023
- Bring proof of payment to EECE stores (MCLD 1032) to pick up you kit.

Lab #6

Copyright © 2012-2023, Jesus Calvino-Fraga. Not to be copied, used, or revised without explicit written permission from the copyright owner.

3

## Getting Started with a New Microcontroller System

1. Obtain/assemble the hardware. Also documentation: datasheets & manuals.
2. Obtain/install the development environment. Also documentation like manuals.
3. Obtain/install a means of putting the ‘firmware’ in the hardware (“Flash Load”). May require additional hardware tools and software.
4. Settle a workflow. Also: examples, application notes, and forums.

Lab #6

Copyright © 2012-2023, Jesus Calvino-Fraga. Not to be copied, used, or revised without explicit written permission from the copyright owner.

4

## Getting Started with a New Microcontroller System

- In this course is not too difficult. Instructions provided for:
  - PIC32MX130: DIP-28. 64k flash. Microchip. MIPS architecture.
  - MSP430G2553: DIP-20. 16k flash. Texas Instruments. MSP430 architecture.
  - ATMEGA328P: DIP-28. 32k flash. Formerly Atmel, now Microchip. AVR architecture.
  - STM32L051: LQFP32. 64k flash. ST Microelectronics. ARM architecture.
  - LPC824: TSOP28. 32k flash. NXP. ARM architecture.

Lab #6

Copyright © 2012-2023, Jesus Calvino-Fraga. Not to be copied, used, or revised without explicit written permission from the copyright owner.

5

## ARM Cortex Processors

- For the ARM processors included in your kit a surface mount adapter and soldering is required.
- Adapters, pins, and de-soldering braid (for cleaning after soldering) are included in both the project #1 and #2 kits.

Lab #6

Copyright © 2012-2023, Jesus Calvino-Fraga. Not to be copied, used, or revised without explicit written permission from the copyright owner.

6

## The PIC32 Microcontroller System


1. Hardware: Bare IC in breadboard.
2. Development environment: XC32 from Microchip. (Derived from GCC but...)
3. Flash Loader: Pro32 via BO230XS board by yours truly.
4. Workflow: via Makefiles in CrossIDE or VS code. Examples in Canvas.

Lab #6

Copyright © 2012-2023, Jesus Calvino-Fraga. Not to be copied, used, or revised without explicit written permission from the copyright owner.

7

## The PIC32 Microcontroller System

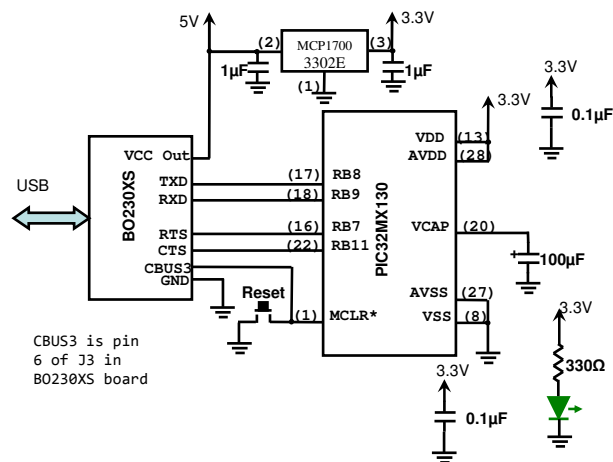

Lab #6

Copyright © 2012-2023, Jesus Calvino-Fraga. Not to be copied, used, or revised without explicit written permission from the copyright owner.

8

# The PIC32 Microcontroller System


Qty	Supplier's#	Man's #	Description
2	BC1148CT-ND	K104Z15Y5VE5TL2	CAP CER 0.1UF 25V Y5V RADIAL
2	BC1157CT-ND	K105Z20Y5VE5TH5	CAP CER 1UF 25V Y5V RADIAL
2	330QBK-ND	CFR-25JB-52-330R	RES 330 OHM 1/4W 5% AXIAL
1	67-1102-ND	SSL-LX5093HD	LED RED DIFF 5MM ROUND T/H
1	67-1108-ND	SSL-LX5093LGD	LED GRN DIFF 5MM ROUND T/H
1	MCP1700-3302E/TO-ND	MCP1700-3302E/TO	IC REG LDO 3.3V 0.25A TO92-3
1	PIC32MX130F064B-I/SP-ND	PIC32MX130F064B-I/SP	IC MCU 32BIT 64KB FLASH 28SDIP
1	493-1548-ND	UHE1E101MED	CAP ALUM 100UF 20% 25V RADIAL
2	P8070SCT-ND	EVQ-11A04M	SWITCH TACTILE SPST-NO 0.02A 15V

Lab #6

Copyright © 2012-2023, Jesus Calvino-Fraga. Not to be copied, used, or revised without explicit written permission from the copyright owner.

9

# The PIC32 Microcontroller System

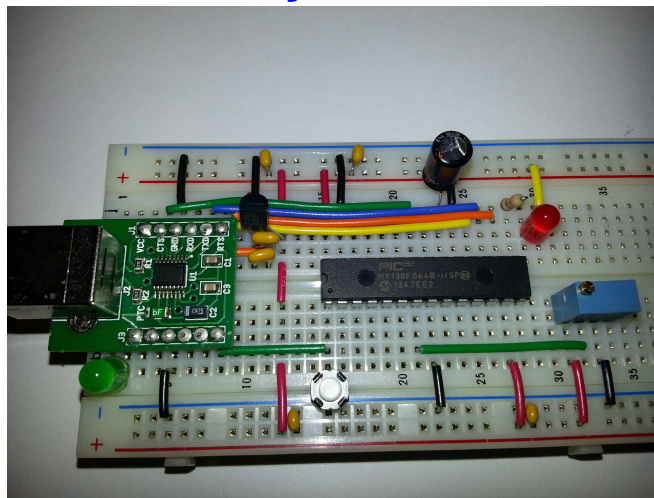

Lab #6

Copyright © 2012-2023, Jesus Calvino-Fraga. Not to be copied, used, or revised without explicit written permission from the copyright owner.

10

## The MSP430 Microcontroller System


1. Hardware: Bare IC + Adapter in breadboard.
2. Development environment: GCC for MSP430.
3. Flash Loader: MSP430\_prog via BO23XS board by yours truly.
4. Workflow: via makefiles in CrossIDE or VS code. Examples in Canvas.

Lab #6

Copyright © 2012-2023, Jesus Calvino-Fraga. Not to be copied, used, or revised without explicit written permission from the copyright owner.

11

## The MSP430 Microcontroller System

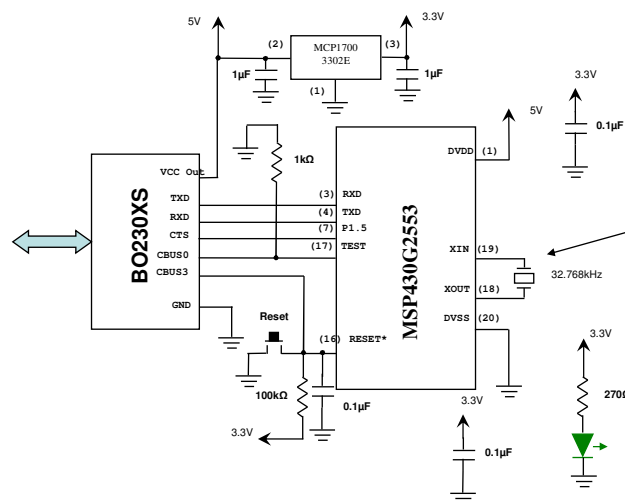

Lab #6

Copyright © 2012-2023, Jesus Calvino-Fraga. Not to be copied, used, or revised without explicit written permission from the copyright owner.

12

# The MSP430 Microcontroller System


Quantity	Digi-Key Part #	Description
3	BC1148CT-ND	0.1uF ceramic capacitors
2	BC1157CT-ND	1uF ceramic capacitor
2	270QBK-ND	270Ω resistor
1	1.0KQBK-ND	1kΩ resistor
1	100KQBK-ND	100kΩ resistor
1	MCP1700-3302E/TO-ND	IC REG LINEAR 3.3V 250MA TO92-3
1	67-1108-ND	LED 5MM GREEN
<del>1</del>	<del>300-8842-ND</del>	<del>CRYSTAL 32.7680KHZ 7PF T/H</del>
1	296-28429-5-ND	MSP430G2553
1	P8070SCT-ND	Push button switch

Lab #6

Copyright © 2012-2023, Jesus Calvino-Fraga. Not to be copied, used, or revised without explicit written permission from the copyright owner.

13

# The MSP430 Microcontroller System

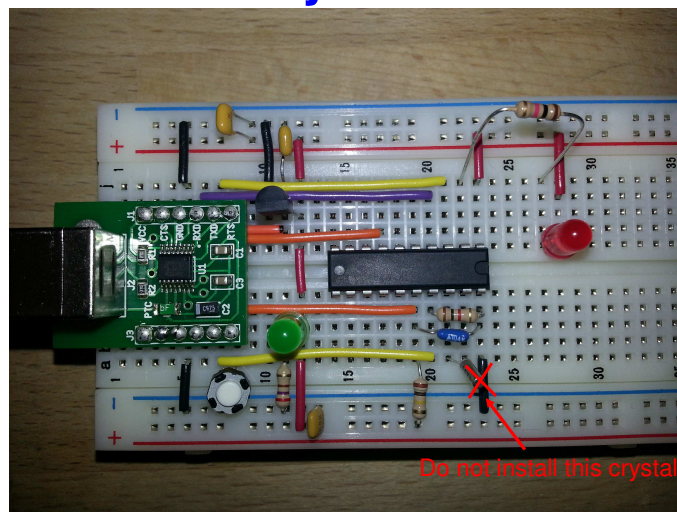

Lab #6

Copyright © 2012-2023, Jesus Calvino-Fraga. Not to be copied, used, or revised without explicit written permission from the copyright owner.

14

## The ATMEGA328P Microcontroller System


1. Hardware: Bare IC in breadboard.
2. Development environment: Atmel AVR 8-bit Toolchain for Windows.
3. Flash Loader: spi\_atmega328 via BO230XS board by yours truly.
4. Workflow: via Makefiles in CrossIDE or VS code. Examples in Canvas.

Lab #6

Copyright © 2012-2023, Jesus Calvino-Fraga. Not to be copied, used, or revised without explicit written permission from the copyright owner.

15

## The ATMEGA328P Microcontroller System

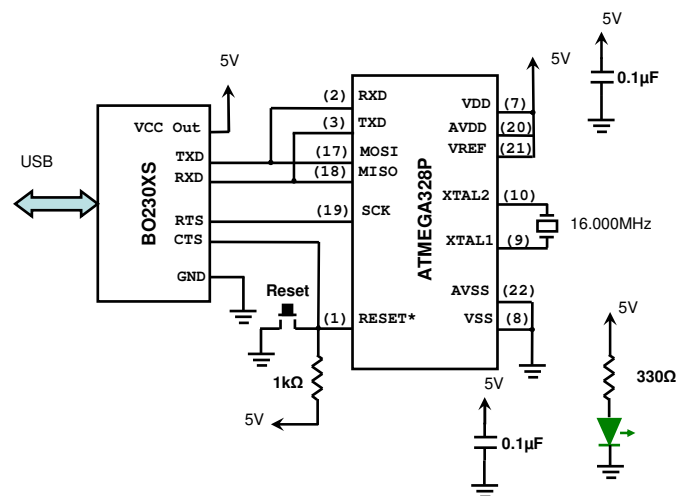

Lab #6

Copyright © 2012-2023, Jesus Calvino-Fraga. Not to be copied, used, or revised without explicit written permission from the copyright owner.

16



## The ATMEGA328P Microcontroller System


Qty	Supplier's#	Man's #	Description
3	BC1148CT-ND	K104Z15Y5VE5TL2	CAP CER 0.1UF 25V Y5V RADIAL
1	1.0KQBK-ND	CFR-25JB-52-1K	RES 1K OHM 1/4W 5% AXIAL
2	330QBK-ND	CFR-25JB-52-330R	RES 330 OHM 1/4W 5% AXIAL
1	67-1102-ND	SSL-LX5093HD	LED RED DIFF 5MM ROUND T/H
1	67-1108-ND	SSL-LX5093LGD	LED GRN DIFF 5MM ROUND T/H
1	CTX1085-ND	ATS16B	CRYSTAL 16.0000MHZ 18PF T/H
1	ATMEGA328P-PU-ND	ATMEGA328P-PU	IC MCU 8BIT 32KB FLASH 28DIP
1	P8070SCT-ND	EVQ-11A04M	SWITCH TACTILE SPST-NO 0.02A 15V

Lab #6

Copyright © 2012-2023, Jesus Calvino-Fraga. Not to be copied, used, or revised without explicit written permission from the copyright owner.

17

## The ATMEGA328P Microcontroller System

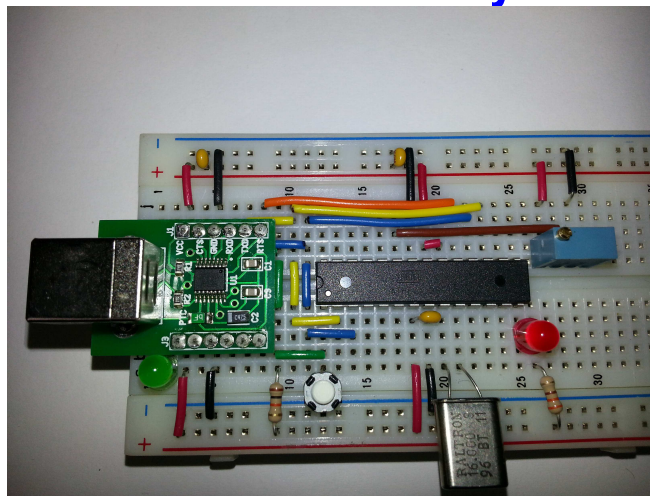

Lab #6

Copyright © 2012-2023, Jesus Calvino-Fraga. Not to be copied, used, or revised without explicit written permission from the copyright owner.

18

1. Hardware: Bare IC + Adapter in breadboard.
2. Development environment: GCC for ARM.
3. Flash Loader: stm32flash.
4. Workflow: via Makefiles in CrossIDE. Examples in Connect.

Copyright © 2012-2023, Jesus Calvino-Fraga. Not to be copied, used, or revised without explicit written permission from the copyright owner.

USB

BO230XS

VCC Out

TXD

RXD

CBUS0

CBUS3

GND

3.3V

BOOT0

1µF

MCP1700 3302E

(2)

(1)

(3)

3.3V

1µF

3.3V

0.1µF

3.3V

0.1µF

270Ω

STM32L051

(20) RXD/PA9

(19) TXD/PA10

(31) BOOT0

(4) NRST

(16) VSS

(32) VSS

3.3V

0.1µF

3.3V

Reset

330Ω

CBUS0 is pin 5 of J3 in the BO230XS board.

CBUS3 is pin 6 of J3 in the BO230XS board.

Copyright © 2012-2023, Jesus Calvino-Fraga. Not to be copied, used, or revised without explicit written permission from the copyright owner.

# The STM32L051 Microcontroller System


Quantity	Digi-Key Part #	Description
2	BC1148CT-ND	0.1uF ceramic capacitors
2	BC1157CT-ND	1uF ceramic capacitors
2	270QBK-ND	270Ω resistor
1	330QBK-ND	330Ω resistor
1	67-1102-ND	LED 5MM RED
1	67-1108-ND	LED 5MM GREEN
1	MCP1700-3302E/TO-ND	MCP17003302E 3.3 Voltage Regulator
1	N/A	BO230XS USB adapter
1	497-14901-ND	STM32L051K8T6
1	1528-1065-ND	LQFP32 to DIP32 adapter board
2	A26509-16-ND	16-pin header connector
1	P8070SCT-ND	Push button switch

Lab #6

21

Copyright © 2012-2023, Jesus Calvino-Fraga. Not to be copied, used, or revised without explicit written permission from the copyright owner.

# The STM32L051 Microcontroller System

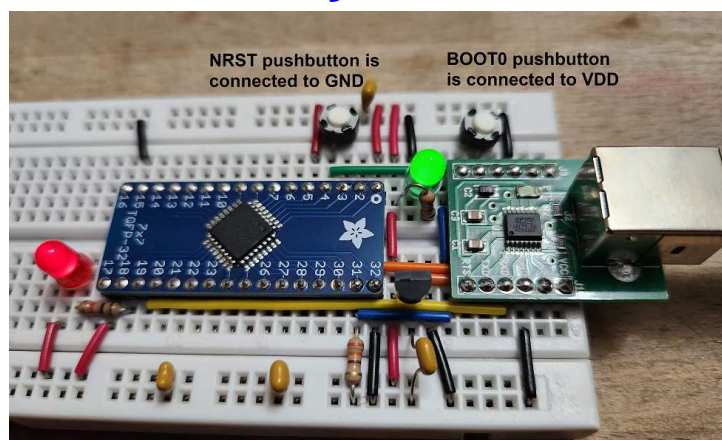

Lab #6

22

Copyright © 2012-2023, Jesus Calvino-Fraga. Not to be copied, used, or revised without explicit written permission from the copyright owner.

## The LPC824 Microcontroller System


1. Hardware: Bare IC + Adapter in breadboard.
2. Development environment: GCC for ARM.
3. Flash Loader: Port of lpc21isp via BO23XS board.
4. Workflow: via makefiles in CrossIDE. Examples in Connect.

Lab #6

Copyright © 2012-2023, Jesus Calvino-Fraga. Not to be copied, used, or revised without explicit written permission from the copyright owner.

23

## The LPC824 Microcontroller System

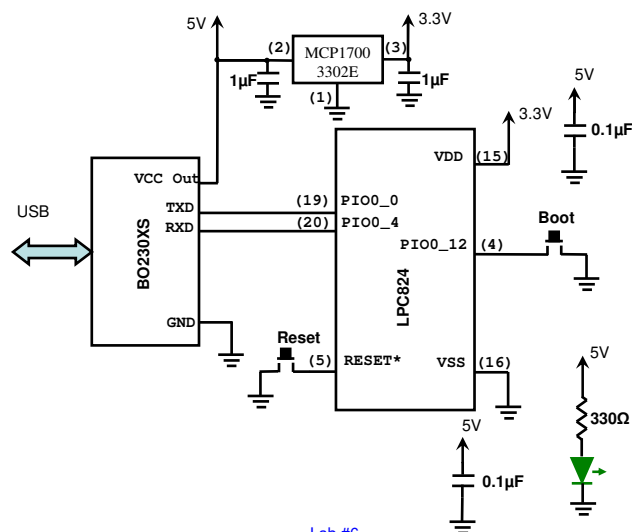

Lab #6

Copyright © 2012-2023, Jesus Calvino-Fraga. Not to be copied, used, or revised without explicit written permission from the copyright owner.

24

## The LPC824 Microcontroller System

Qty	Supplier's#	Man's #	Description
2	BC1148CT-ND	K104Z15Y5VE5TL2	CAP CER 0.1UF 25V Y5V RADIAL
2	BC1157CT-ND	K105Z20Y5VE5TH5	CAP CER 1UF 25V Y5V RADIAL
1	1.0QBK-ND	CFR-25JB-52-1R	RES 1 OHM 1/4W 5% AXIAL
1	330QBK-ND	CFR-25JB-52-330R	RES 330 OHM 1/4W 5% AXIAL
1	67-1102-ND	SSL-LX5093HD	LED RED DIFF 5MM ROUND T/H
1	67-1108-ND	SSL-LX5093LGD	LED GRN DIFF 5MM ROUND T/H
1	MCP1700-3302E/TO-ND	MCP1700-3302E/TO	IC REG LDO 3.3V 0.25A TO92-3
1	568-11619-1-ND	LPC824M201JDH20J	IC MCU 32BIT 32KB FLASH 20TSSOP
0.33	1528-1066-ND	1206	SMT ADAPTERS 3 PACK 20SOIC/TSSOP
2	A26509-10-ND	4-103741-0-10	CONN HEADR BRKWAY .100 10POS STR
2	P8070SCT-ND	EVQ-11A04M	SWITCH TACTILE SPST-NO 0.02A 15V


Total

25

Lab #6

Copyright © 2012-2023, Jesus Calvino-Fraga. Not to be copied, used, or revised without explicit written permission from the copyright owner.

## The LPC824 Microcontroller System

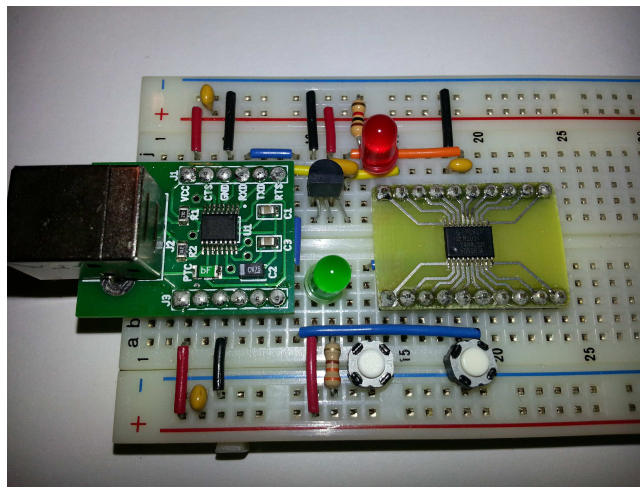

26

Lab #6

Copyright © 2012-2023, Jesus Calvino-Fraga. Not to be copied, used, or revised without explicit written permission from the copyright owner.

## Which one to Pick?

- Size of the documentation:
  - ATmega328P: 294 pages
  - MSP430: 644+76 pages
  - PIC32: 1138+344 pages
  - LPC824: 487+82 pages
  - STM32L051: 784+133 pages
- Quality of the documentation (personal opinion):
  - ATmega328P: ok
  - MSP430: ok
  - PIC32: Excellent
  - LPC824: Excellent
  - STM32L051: Very good.

Lab #6

27

Copyright © 2012-2023, Jesus Calvino-Fraga. Not to be copied, used, or revised without explicit written permission from the copyright owner.

## Which one to Pick?

- Raw power:
  - ATmega328P: ok
  - MSP430: Good
  - PIC32: Excellent
  - STM32L051: Excellent
  - LPC824: 60MHz! The fastest of the bunch.
- Examples:
  - ATmega328P: Excellent. Everywhere!
  - MSP430: Good
  - PIC32: Good (in the manual!)
  - STM32L051: Good (in the manual!)
  - LPC824: Good (in the manual!)
- Number of timers (I may be wrong):
  - ATmega328P: 1 x 16-bits, 2 x 8-bits.
  - MSP430: 2 x 16-bit (each with two channels)
  - PIC32: 5 x 16-bit
  - STM32L051: 4 x 16 bit, 1 x 24 bit. TIM2 has four channels. TIM21 and TIM22 have two channels. TIM6 has one channel. SysTick.
  - LPC824: 4 x 16 bit + SCTimer + SysTick.

Lab #6

28

Copyright © 2012-2023, Jesus Calvino-Fraga. Not to be copied, used, or revised without explicit written permission from the copyright owner.

## The BO230XS Board


- The BO230XS is a minimal system around the FT230XS IC that allows for communication between a Computer (using USB) and a microcontroller system.
- It can be used as serial port interface or a SPI interface using libraries and drivers provided by the manufacturer.
- Permits the implementation of simple flash memory programmers via boot loaders and SPI.

Lab #6

29

Copyright © 2012-2023, Jesus Calvino-Fraga. Not to be copied, used, or revised without explicit written permission from the copyright owner.

## The BO230XS Board Schematic

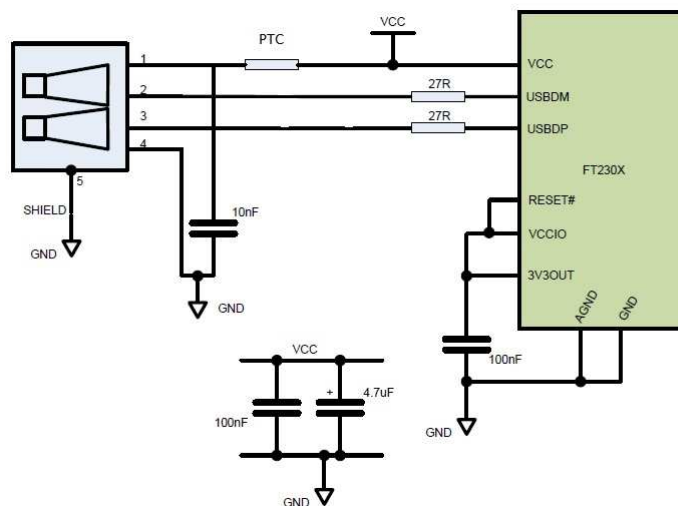

Lab #6

30

Copyright © 2012-2023, Jesus Calvino-Fraga. Not to be copied, used, or revised without explicit written permission from the copyright owner.

## The FT230XS Board

Qty	Supplier's#	Man's #	Description
1	768-1135-1-ND	FT230XS-R	IC USB SERIAL BASIC UART 16SSOP
2	A26509-06-ND	4-103741-0-06	CONN HEADR BRKWAY .100 06POS STR
1	ED2983-ND	USB-B1HSB6	CONN USB TYPE B R/A BLACK
2	399-1170-1-ND	C0805C104K5RACTU	CAP CER 0.1UF 50V X7R 0805
2	P27ACT-ND	ERJ-6GEYJ270V	RES SMD 27 OHM 5% 1/8W 0805
1	478-8222-1-ND	F931A475MAA	CAP TANT 4.7UF 10V 20% 1206
1	507-1797-1-ND	0ZCJ0020FF2E	PTC RESTTBLE 0.20A 30V CHIP 1206
1			PCB from PCBCart

Lab #6

31

Copyright © 2012-2023, Jesus Calvino-Fraga. Not to be copied, used, or revised without explicit written permission from the copyright owner.

## BO230XS replacement

- Boards that use either the FT230XS or FT231XS ICs are ok.
- Inexpensive option from DigiKey (\$14.27):
  - **LC231X.**
  - Digi-Key Part Number: 768-1316-ND.
  - You'll need to solder the header pins.

Lab #6

32

Copyright © 2012-2023, Jesus Calvino-Fraga. Not to be copied, used, or revised without explicit written permission from the copyright owner.



## Examples Relevant to Lab #6

- ATmega328:
  - LCD and Period.
- MSP430:
  - LCD and Period.
- PIC32MX130:
  - LCD and Period.
- STM32L051:
  - LCD and Period.
- LPC824:
  - LCD and Period.


Lab #6

33

Copyright © 2012-2023, Jesus Calvino-Fraga. Not to be copied, used, or revised without explicit written permission from the copyright owner.

## ATmega328P Pin Equivalent Circuit

Figure 14-1. I/O Pin Equivalent Schematic

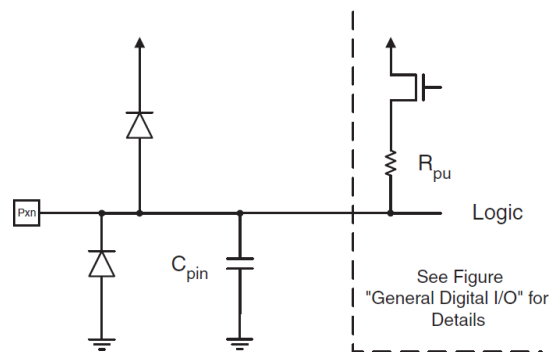


Lab #6

34

Copyright © 2012-2023, Jesus Calvino-Fraga. Not to be copied, used, or revised without explicit written permission from the copyright owner.

# LPC824 Pin Equivalent Circuit

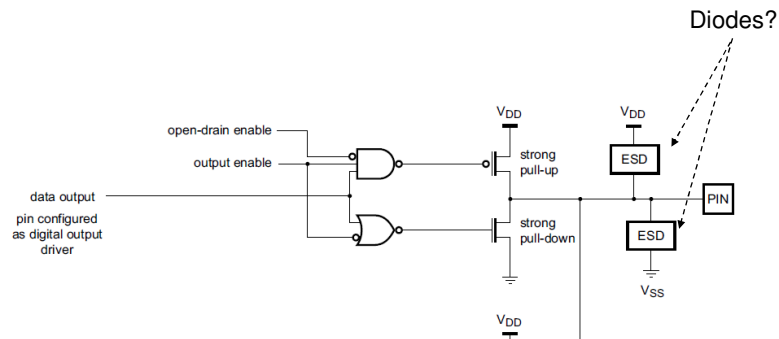

Page 15 of "Product data sheet"

Lab #6

35

Copyright © 2012-2023, Jesus Calvino-Fraga. Not to be copied, used, or revised without explicit written permission from the copyright owner.

# MSP430 Pin Equivalent Circuit

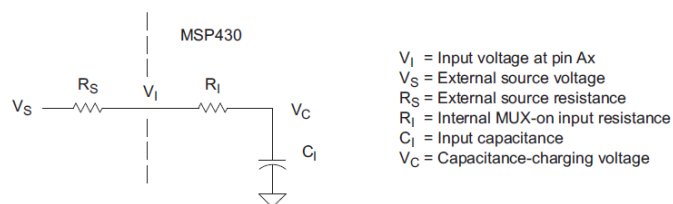


Figure 22-4. Analog Input Equivalent Circuit

No diodes?


Lab #6

36

Copyright © 2012-2023, Jesus Calvino-Fraga. Not to be copied, used, or revised without explicit written permission from the copyright owner.

# PIC32MX130 Pin Equivalent Circuit

Figure 17-22: 10-Bit A/D Converter Analog Input Model

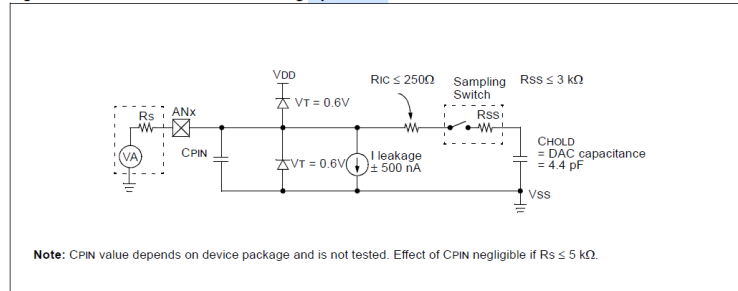

Lab #6

Copyright © 2012-2023, Jesus Calvino-Fraga. Not to be copied, used, or revised without explicit written permission from the copyright owner.


37

# STM32L051 Pin Equivalent Circuit

Electrical characteristics

STM32L051x6 STM32L051x8

Figure 29. Typical connection diagram using the ADC

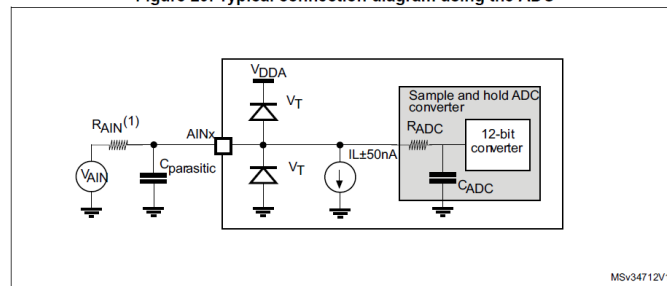


Lab #6

Copyright © 2012-2023, Jesus Calvino-Fraga. Not to be copied, used, or revised without explicit written permission from the copyright owner.

38

## Recommended Circuit for Lab #6

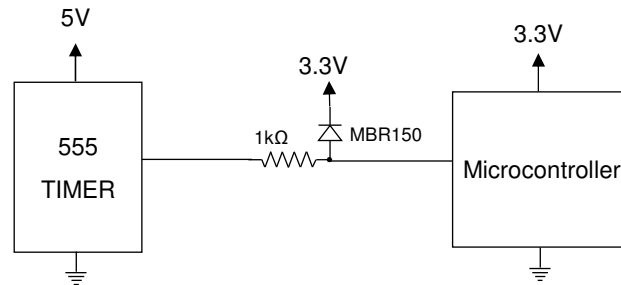

Since the ATmega328P power is 5V, no protection circuit is needed.

The diode is only needed if using the MSP430G2553.

Lab #6

39

Copyright © 2012-2023, Jesus Calvino-Fraga. Not to be copied, used, or revised without explicit written permission from the copyright owner.

## macOS support

- As of the moment of writing this, the only processors supported in macOS are the LPC824 and STM32L051. Instructions posted on Canvas.
- The LPC824 and the STM32L051 are the only ones that come with a proper serial boot loader from factory.
- (The MSP430 has also a serial boot loader, but the programming pins are a mess! Therefore it doesn't work on macOS.)

Lab #6

40

Copyright © 2012-2023, Jesus Calvino-Fraga. Not to be copied, used, or revised without explicit written permission from the copyright owner.