


LOC/DME I-LAS	APP CRS	Rwy Idg	26R	26L
110.3	259°	TDZE	12638	10526
Chan 40		Apt Elev	2067	2069
			2181	2181

ILS or LOC RWY 26R
HARRY REID INTL (LAS)

From BERBN: RNP APCH - GPS required.			MALS Rwy 26R	MALSF Rwy 26L	MISSED APPROACH: Climb to 3200 then climbing right turn to 6000 on heading 080° and BLD R-286 to BLD VORTAC and hold, continue climb-in-hold to 6000.
For inop ALS, increase S-ILS-26R all Cats visibility to ¾ SM, S-LOC-26R Cat E visibility to 1 ¾ SM. Inop table does not apply to Sidestep Rwy 26L.					
D-ATIS	LAS VEGAS APP CON	LAS VEGAS TOWER	GND CON	CLNC DEL	CPDLC
132.4	125.025 379.15 (West) 119.775 282.2 (East)	118.75 257.8 (Rwy 1L/19R, 1R/19L) 119.9 257.8 (Rwy 8L/26R, 8R/26L)	121.1 270.8 E of 1R/19L 121.9 254.3 W of 1R/19L	118.0	

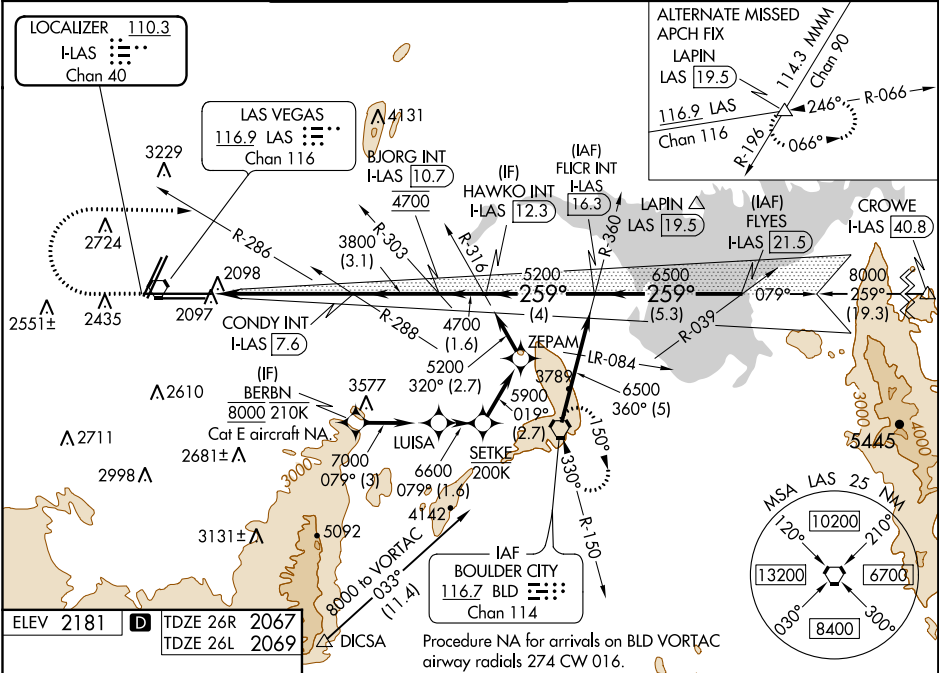

ELEV 2181	TDZE 26R 2067	TDZE 26L 2069	Procedure NA for arrivals on BLD VORTAC airway radials 274 CW 016.		
MIRL Rwy 1R-19L REIL Rwy 1R, 8R, 19L and 19R HIRL Rwy 1L-19R, 8L-26R and 8R-26L			*LOC only		
FAF to MAP 5.3 NM			See planview for multiple IF locations.		
Knots 60 90 120 150 180 Min:Sec 5:18 3:32 2:39 2:07 1:46			CIRCLING		